

Modular Electrical Linear Drives

ORIGA SYSTEM PLUS



 **ORIGA**

Contents

Modular Electrical Linear Drives



	Data-Sheet	Page		Data-Sheet	Page
OSP Concept	1.01.015E	2-3	OSP-Accessories		
Modular Components Overview	1.01.016E	4-7	Overview	1.44.001E	117
Applications for OSP-E Drives	1.01.016E	8-9	Motor Mountings (Coupling housing, motor flange, motor coupling)		
Toothed Belt Driven			Series OSP-E..BHD	1.44.006E-2	120
– With Integrated Recirculating Ball Bearing Guide			Series OSP-E..BV	1.44.006E-3	121
Series OSP-E..BHD 20, 25, 32, 50	1.15.001E	11-14	Series OSP-E..B	1.44.006E-4	122
or integrated Roller Guide			Series OSP-E..SB, ..ST, ..SBR, ..STR	1.44.006E-5	123
Series OSP-E..BHD 25, 32, 50	1.15.002E	15-24	Motor flange configurator, freely selectable	1.44.006E-6,-7	124,125
– Vertical Linear Drive with Integrated Recirculating Ball Bearing Guide	1.20.015E	25-28	Belt Gear, freely selectable	1.44.006E-8	126
Series OSP-E..BV 20, 25	1.20.016E	29-34	End Cap Mounting		
– With Internal Plain Bearing Guide	1.20.001E	35-38	Series OSP-E..BHD	1.44.010E-2,-3	128,129
Series OSP-E..B 25, 32, 50	1.20.002E	39-46	Series OSP-E..B, ..SB, ..ST	1.44.010E-4	130
Screw Driven			Series OSP-E..SBR, STR	1.44.010E-5	131
– With Ball Screw Drive	1.30.001E	47-50	End Cap Mounting for OSP-E with guide	1.44.014E-2,-3	144, 145
and Internal Plain Bearing Guide			Flange Mounting C		
Series OSP-E..SB 25, 32, 50	1.30.002E	51-58	Series OSP-E..SBR, ..STR	1.44.010E-6	132
– With Trapezoidal Screw Drive	1.35.001E	59-62	Profile fastening for multi-axis systems	1.44.010E-7	133
and Internal Plain Bearing Guide			Mid-Section Support, standard		
Series OSP-E..ST 25, 32, 50	1.35.002E	63-68	Series OSP-E..BHD	1.44.010E-8	134
Screw Driven with Piston Rod			Series OSP-E..B, ..SB, ..ST, ..SBR, ..STR	1.44.010E-9	135
– With Ball Screw Drive	1.35.020E	69-72	Mid-Section Support for OSP-E with guide	1.44.014E-4	146
and Internal Plain Bearing Guide			Profile connection		
Series OSP-E..SBR 25, 32, 50	1.35.021E	73-76	Mounting rail OSP-E	1.44.010E-10	136
– With Trapezoidal Screw Drive	1.35.010E	77-80	T-Nut Profile OSP-E	1.44.010E-11	137
and Internal Plain Bearing Guide			Connection Profile OSP-E	1.44.010E-12	138
Series OSP-E..STR 25, 32, 50	1.35.011E	81-84	Trunnion mounting EN	1.44.010E-13	139
Multi-Axis Systems			OSP-E..SBR, ..STR		
Overview	1.38.001E	85-88	Pivot mounting EL OSP-E..SBR, ..STR	1.44.010E-13	139
Adapter Plates	1.38.002E	89-97	Clevis Mounting OSP-E..B, ..SB, ..ST	1.44.010E-14	140
Intermediate Drive Shaft	1.38.004E	99	Clevis Mounting, low backlash	1.44.010E-15	141
Linear Guides			Inversion Mounting OSP-E..B, ..SB, ..ST	1.44.010E-16	142
Overview	1.40.020E	101-102	Piston Rod Knuckle		
Plain Bearing Guide SLIDELINE	1.40.021E	103-104	Piston Rod Eye	1.44.018E-2	148
Roller Guide POWERSLIDE	1.40.022E	105-108	Piston Rod Clevis	1.44.018E-2	148
Aluminium-Roller Guide PROLINE	1.40.024E	109-111	Piston Rod Compensating Coupling	1.44.018E-3	149
Heavy Duty - Guide HD	1.40.025E	113-115	Magnetic Switches	1.44.030E	153-156
			SFI-plus Displacement Measuring System	1.44.035E	157-159
			Cable Cover	1.44.040E	161

ORIGA SYSTEM PLUS

- ONE CONCEPT
- THREE DRIVE OPTIONS

Based on the concept of the rodless pneumatic cylinder, well proven worldwide, HOERBIGER-ORIGA now offers the complete solution for linear drive systems. Developed for absolute reliability, high performance, easy handling and optimized design, ORIGA SYSTEM PLUS can master even the most difficult installation requirements.

ORIGA SYSTEM PLUS

is a completely modular concept, enabling pneumatic and electric drives to be combined with guides and control modules for all kinds of applications.

The main system carriers are the drives themselves, consisting of extruded aluminium profiles with double dovetail slots on three sides,

providing direct mounting for all modular options.



MODULAR SYSTEM

• Electric Toothed Belt Drive

- For applications with higher speeds and precise movement and positioning for longer travel.

• Electric Screw Drive

- For higher drive power and precise movement and positioning.

• Pneumatic Drive

- For a wide variety of applications with simple handling, combined with simple control possibilities and a broad power spectrum.
- Ideal for fast, repetitive movements and simple positioning duties.

**For further information see the
Pneumatic Linear Drives Catalogue
A4P011E .**


- 18 additional guide variants provide any required precision, performance and load capacity.
- Compact solutions, easy to install and simple to retrofit.
- Valves and control elements can be mounted directly on the pneumatic drive.
- A wide range of mounting options provides great installation flexibility.

ORIGA SYSTEM PLUS

– ONE CONCEPT

– THREE DRIVE OPTIONS

* Information on Pneumatic Linear Drives, see Catalogue A4 P011E

Basic Linear Drive – Standard Version ● Series OSP-P* ● Series OSP-E Toothed Belt with internal Plain Bearing Guide Toothed Belt with integrated Guides Vertical Toothed Belt with integrated Recirculating Ball Bearing Guide ● Series OSP-E Screw (Ball Screw, Trapezoidal Screw)		Multi-Axis Systems Connecting elements ● Adapter Plates ● Intermediate Drive Shafts	
Air Connection on the End-face or both at One End ● Series OSP-P*		Duplex-Connection ● Series OSP-P*	
Clean Room Cylinders certified to DIN EN ISO 146644-1 ● Series OSP-P* ● Series OSP-E..SB		Multiplex-Connection ● Series OSP-P*	
Products in ATEX-Version ● Series OSP-P* Rodless Cylinders		Linear Guides – SLIDELINE ● Series OSP-P* ● Series OSP-E Screw	
Products in ATEX-Version ● Series OSP-P* Rodless Cylinders with plain bearing SLIDELINE		Linear Guides – POWERSLIDE ● Series OSP-P* ● Series OSP-E Belt ● Series OSP-E Screw	
Cylinders for synchronized counter-rotation of the cylinders ● Series OSP-P*		Linear Guides – PROLINE ● Series OSP-P* ● Series OSP-E Belt ● Series OSP-E Screw	
Integrated 3/2-Way Valves ● Series OSP-P*		Linear Guides – STARLINE ● Series OSP-P*	
Clevis Mounting ● Series OSP-P* ● Series OSP-E Belt ● Series OSP-E Screw		Linear Guides – KF ● Series OSP-P*	
End Cap Mounting ● Series OSP-P* ● Series OSP-E Belt ● Series OSP-E Screw		Heavy Duty-Guides – HD ● Series OSP-P* ● Series OSP-E Screw	
Mid-Section Support ● Series OSP-P* ● Series OSP-E Belt ● Series OSP-E Screw		Brakes ● Active Brakes* ● Passive Brakes*	
Inversion Mounting ● Series OSP-P* ● Series OSP-E Belt ● Series OSP-E Screw		Magnetic Switches ● Series OSP-P* ● Series OSP-E Belt ● Series OSP-E Screw	
		SFI-Plus Dispacemet Mesuring Systems ● Series OSP-P* ● Series OSP-E Screw	
		Drive Systems and components for Electrical Linear Drives OSP-E ● Stepper Motor and Controller ● Servo Motor and Controller ● Gears	

Electric Linear Drive, Modular Components - Overview

Drives	OSP-E20 -BHD ¹⁾	OSP-E25 -BHD ^{1), 2)}	OSP-E32 -BHD ^{1), 2)}	OSP-E50 -BHD ^{1), 2)}	OSP-E20 -BV ³⁾	OSP-E25 -BV ³⁾	OSP-E25 -B ⁴⁾	OSP-E32 -B ⁴⁾	OSP-E50 -B ⁴⁾	
Effective action force F _A [N]	450 - 550	550 - 1070	1030 - 1870	1940 - 3120	450 - 650	1050 - 1490	50	100 - 150	300 - 425	
Max. Velocity v [m/s]	3.0	10.0 / 5	10.0 / 5	10.0 / 5	3.0	5.0	2.0	3.0	5.0	
Integrated Magnets	□	□	□	□	–	–	□	□	□	
Free choice of stroke length [mm] **	1 - 5760	1 - 7000	1 - 7000	1 - 7000	1 - 1000	1 - 1500	1 - 3000	1 - 5000	1 - 5000	
Temperature range [°C]	-30 – +80	-30 – +80	-30 – +80	-30 – +80	-30 – +80	-30 – +80	-30 – +80	-30 – +80	-30 – +80	
Tandem Version	O	O	O	O	O	O	O	O	O	
Bi-parting Version	O	O	O	O	–	–	O	O	O	
Stainless steel parts	X	X	X	X	X	X	X	X	X	
Integrated planetary gearbox LPB***	–	O	O	O	–	–	–	–	–	
Self-Guidance										
F [N]	1600	3000 / 986	10000 / 1348	15000 / 3704	1600	3000	160	300	850	
Mx [Nm]	21	50 / 11	120 / 19	180 / 87	20	50	2	8	16	
My [Nm]	150	500 / 64	1000 / 115	1800 / 365	100	200	12	25	80	
Mz [Nm]	150	500 / 64	1400 / 115	2500 / 365	100	200	8	16	32	
Slideline										
F [N]	–	–	–	–	–	–	–	–	–	
Mx [Nm]	–	–	–	–	–	–	–	–	–	
My [Nm]	–	–	–	–	–	–	–	–	–	
Mz [Nm]	–	–	–	–	–	–	–	–	–	
Proline										
F [N]	–	–	–	–	–	–	986	1348	3582	
Mx [Nm]	–	–	–	–	–	–	19	33	128	
My [Nm]	–	–	–	–	–	–	44	84	287	
Mz [Nm]	–	–	–	–	–	–	44	84	287	
Powerslide										
F [N]	–	–	–	–	–	–	910 - 1190	1400 - 2300	3000 - 4000	
Mx [Nm]	–	–	–	–	–	–	14 - 20	20 - 50	90 - 140	
My [Nm]	–	–	–	–	–	–	63 - 175	70 - 175	250 - 350	
Mz [Nm]	–	–	–	–	–	–	63 - 175	70 - 175	250 - 350	
HD-Guide (Heavy Duty)										
F [N]	–	–	–	–	–	–	–	–	–	
Mx [Nm]	–	–	–	–	–	–	–	–	–	
My [Nm]	–	–	–	–	–	–	–	–	–	
Mz [Nm]	–	–	–	–	–	–	–	–	–	
Accessories										
Multi-Axis System										
Connecting elements	O	O	O	O	O	O	O	O	O	
Connecting shaft	O	O	O	O	O	O	O	O	O	
Special Drives										
Clean Room Cylinders	X	X	X	X	X	X	X	X	X	
Mountings										
Clevis Mounting	X	X	X	X	X	X	O	O	O	
End Cap Mounting / Midsection Support	O	O	O	O	X	X	O	O	O	
Inversion Mounting	X	X	X	X	X	X	O	O	O	
Adapter Profile / T-Nut Profile	O	O	O	O	X	X	O	O	O	
Magnetic switches										
Reed Switches RS (NO, NC)	O	O	O	O	O	O	O	O	O	
Electronic Switches ES (PNP, NPN)	O	O	O	O	O	O	O	O	O	
Measuring systems										
SFI-plus Displacement Measuring System	X	X	X	X	X	X	X	X	X	
Motor package (stepper / servo)										
	O	O	O	O	O	O	O	O	O	
Gearbox										
Planetary gear and angular gear	O	O	O	O	O	O	–	–	–	

□ = Standard version

O = Option

X = Currently not available

** = other temperature ranges on request

** = **exc. safety clearance from mechanical end position**
other stroke lengths on request

*** = ratio i = 3, 5, 10

¹⁾ = Linear Drive with Toothed Belt and Integrated Recirculating Ball Bearing Guide

²⁾ = Linear Drive with Toothed Belt and Integrated Roller Guide

³⁾ = Vertical Linear Drive with Toothed Belt and Integrated Recirculating Ball Bearing Guide

⁴⁾ = Linear Drive with Toothed Belt and Internal Plain Bearing Guide

⁵⁾ = Linear Drive with Ball Screw Drive and Internal Plain Bearing Guide

⁶⁾ = Linear Drive with Trapezoidal Screw Drive and Internal Plain Bearing Guide


⁷⁾ = Linear Drive with Ball Screw Drive, Internal Plain Bearing Guide and Piston Rod

⁸⁾ = Linear Drive with Trapezoidal Screw Drive, Internal Plain Bearing Guide and Piston Rod


	OSP-E25 -SB ⁵⁾	OSP-E32 -SB ⁵⁾	OSP-E50 -SB ⁵⁾	OSP-E25 -ST ⁶⁾	OSP-E32 -ST ⁶⁾	OSP-E50 -ST ⁶⁾	OSP-E25 -SBR ⁷⁾	OSP-E32 -SBR ⁷⁾	OSP-E50 -SBR ⁷⁾	OSP-E25 -STR ⁸⁾	OSP-E32 -STR ⁸⁾	OSP-E50 -STR ⁸⁾
	250	600	1500	600	1300	2500	260	900	1200	800	1600	3300
	0.25	0.5	1.25	0.1	0.1	0.15	0.25	0.5	1.25	0.075	0.1	0.125
	□	□	□	□	□	□	□	□	□	□	□	□
	1 - 1100	1 - 2000	1 - 3200	1 - 1100	1 - 2000	1 - 2500	1 - 500	1 - 500	1 - 500	1 - 500	1 - 500	1 - 500
	-20 - +80	-20 - +80	-20 - +80	-20 - +70	-20 - +70	-20 - +70	-20 - +80	-20 - +80	-20 - +80	-20 - +70	-20 - +70	-20 - +70
	O	O	O	O	O	O	-	-	-	-	-	-
	X	X	X	X	X	X	X	X	X	X	X	X
	-	-	-	-	-	-	-	-	-	-	-	-
	500	1200	3000	500	1000	1500	-	-	-	-	-	-
	2	8	16	2	6	13	-	-	-	-	-	-
	12	25	80	24	65	155	-	-	-	-	-	-
	8	16	32	7	12	26	-	-	-	-	-	-
	675	925	2000	675	925	2000	-	-	-	-	-	-
	14	29	77	14	29	77	-	-	-	-	-	-
	34	60	180	34	60	180	-	-	-	-	-	-
	34	60	180	34	60	180	-	-	-	-	-	-
	986	1348	3582	986	1348	3582	-	-	-	-	-	-
	19	33	128	19	33	128	-	-	-	-	-	-
	44	84	287	44	84	287	-	-	-	-	-	-
	44	84	287	44	84	287	-	-	-	-	-	-
	910-1190	1400-2300	3000-4000	900-1190	1400-2300	3000-4000	-	-	-	-	-	-
	14-20	20-50	90-140	14-20	20-50	90-140	-	-	-	-	-	-
	63-175	70-175	250-350	63-175	70-175	250-350	-	-	-	-	-	-
	63-175	70-175	250-350	63-175	70-175	250-350	-	-	-	-	-	-
	6000	6000	18000	6000	6000	18000	-	-	-	-	-	-
	320	475	1400	320	475	1400	-	-	-	-	-	-
	260	285	1100	260	285	1100	-	-	-	-	-	-
	320	475	1400	320	475	1400	-	-	-	-	-	-
	O	O	O	O	O	O	O	O	O	O	O	O
	O	O	O	O	O	O	O	O	O	O	O	O
	O	O	O	X	X	X	X	X	X	X	X	X
	O	O	O	O	O	O	-	-	-	-	-	-
	O	O	O	O	O	O	O	O	O	O	O	O
	O	O	O	O	O	O	-	-	-	-	-	-
	O	O	O	O	O	O	O	O	O	O	O	O
	O	O	O	O	O	O	O	O	O	O	O	O
	O	O	O	O	O	O	O	O	O	O	O	O
	O	O	O	O	O	O	-	-	-	-	-	-
	O	O	O	O	O	O	O	O	O	O	O	O
	-	-	-	-	-	-	-	-	-	-	-	-

ONE COMPLETE SYSTEM – SEVEN DRIVE OPTIONS FOR ALL POSSIBLE APPLICATIONS

Linear Drive with Toothed Belt and integrated Recirculating Ball Bearing Guide or Roller Guide
Series OSP-E..BHD

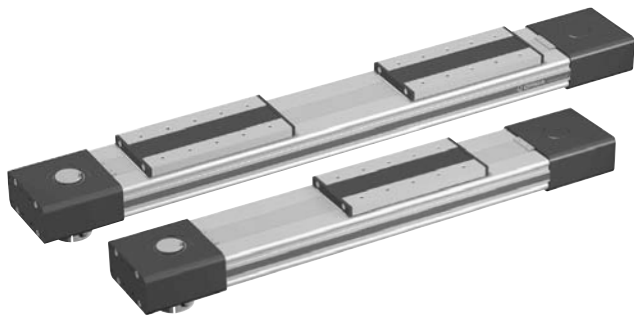

Vertical Linear Drive with Toothed Belt and integrated Recirculating Ball Bearing Guide
Series OSP-E..BV

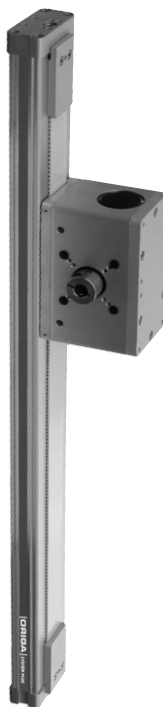

Linear Drive with Toothed Belt and internal Plain Bearing Guide
Series OSP-E..B



Linear Drive with Ball Screw Drive and internal Plain Bearing Guide
Series OSP-E..SB



Linear Drive with Trapezoidal Screw Drive and internal Plain Bearing Guide
Series OSP-E..ST





Linear Drive with Ball Screw Drive, internal Plain Bearing Guide and Piston Rod
Series OSP-E..SBR





Linear Drive with Trapezoidal Screw Drive, internal Plain Bearing Guide and Piston Rod
Series OSP-E..STR



STANDARD VERSIONS, OPTIONS AND ACCESSORIES


Toothed Belt-Driven – Basic Versions			
Description	Toothed Belt-Driven with Integrated Guide 	Vertical Linear Drive with Toothed Belt 	Toothed Belt-Driven 
Standard Versions	 – Direction of motion – Position of the drive shaft	– Position of the drive shaft	 – Position of the drive shaft
Options	– Tandem – Bi-directional – Integrated Planetary Gearbox	– Tandem	– Tandem – Bi-directional – Niro
Mountings			
Clevis Mounting	–	–	0
End Cap Mounting	0	–	0
Mid-Section Support	0	–	0
Inversion Mounting	–	–	0
Accessories			
Magnetic Switches	0	0	0
Motor Mountings	0	0	0
Linear Guides	–	–	0
Multi-Axis Connection System	0	0	0

Screw-Driven – Basic Versions			
Description	Ball Screw -Driven 	Trapezoidal Screw- Driven 	Screw-Driven with extending Rod – with Trapezoidal Screw – with Ball Screw 
Standard Versions	 – Spindle pitch of the ball screws		
Options	– Clean room version – Displacement Measuring System SFI-plus	– Displacement Measuring System SFI-plus	
Mountings			
Clevis Mounting	0	0	–
End Cap Mounting	0	0	0
Mid-Section Support	0	0	0
Inversion Mounting	0	0	–
Accessories			
Magnetic Switches	0	0	0
Motor Mounting	0	0	0
Flansh Mounting	–	–	0
Trunnion Mounting	–	–	0
Piston Rod Knuckle	–	–	0
Linear Guides	0	0	–
Multi-Axis Connection System	0	0	0

APPLICATION EXAMPLES FOR ELECTRIC LINEAR DRIVE SYSTEMS


Auto Handling

- high speed pick and place movements

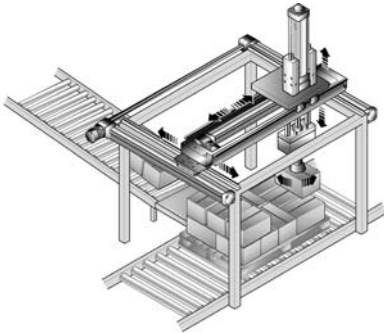


Material Handling Systems

- vertical and horizontal transfer movements

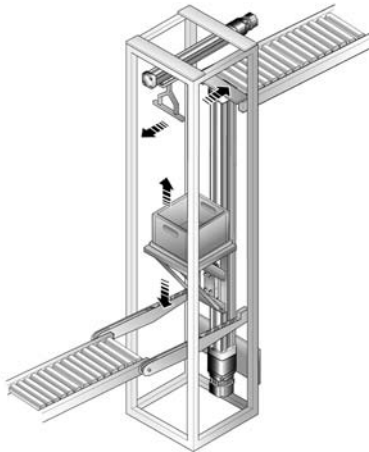


Punching Machines

- accurate feeding and positioning

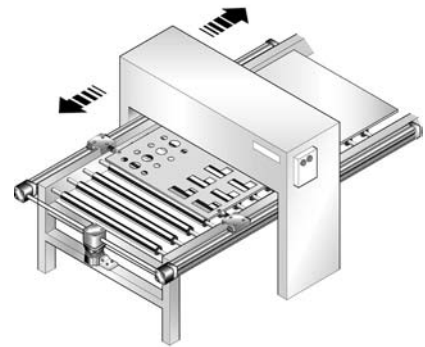


Mechanical Handling

- parallel operation of actuators on a vertical handling system

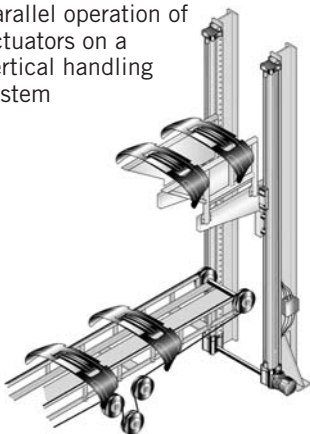


Profile Cutting Machines

- intricate profile movements of water jets and lasers

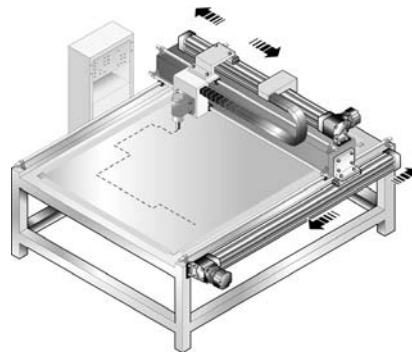

Slitting Machines

- high speed traverse applications for the slicing of papers and textiles

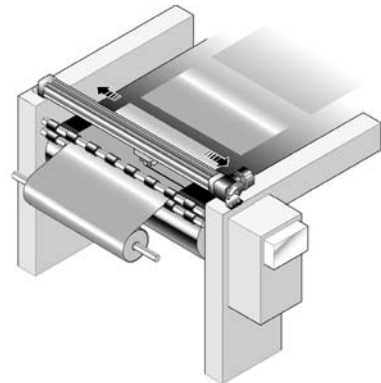

Spray Coating

- synchronized high speed bi-parting movements




Automatic Doors and Guards

- simple bi-parting operation




Ergonomic Workstations

- adjustment of working levels

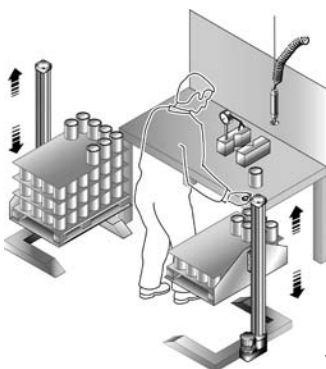


Automated Filling Machines

- accurate 3-axis positioning

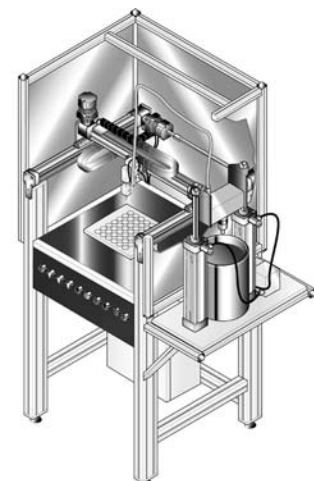


Robotic Installations

- traverse of robots between work stations

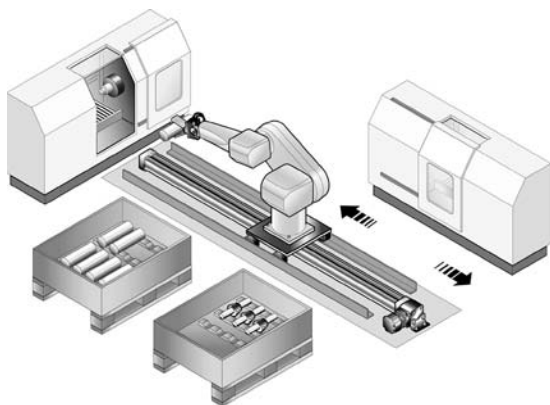



Milling Machines

- precise slow speed feeding in 2-axis

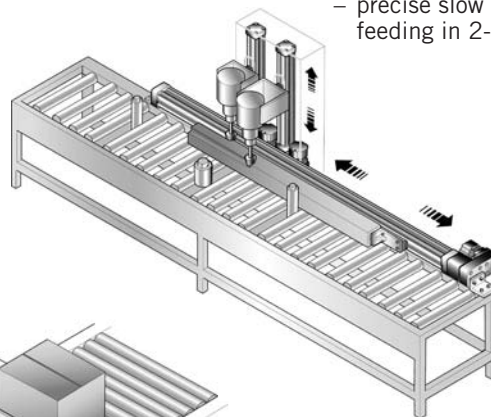


Conveyor Systems

- simple cross-transfer actuators

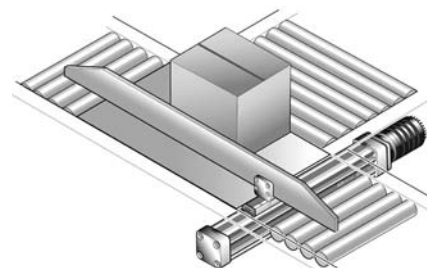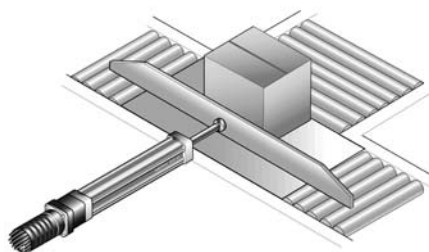


Spraying Equipment

- precision reciprocating action

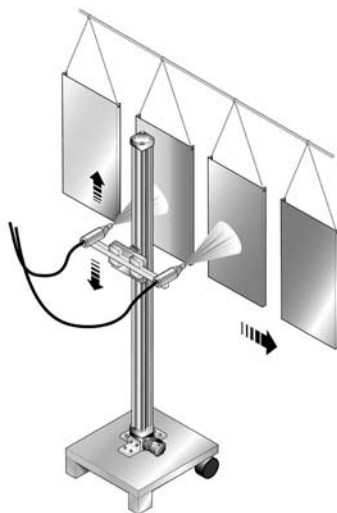


Measuring Systems

- optical curvature gauging using synchronised bi-parting actuation

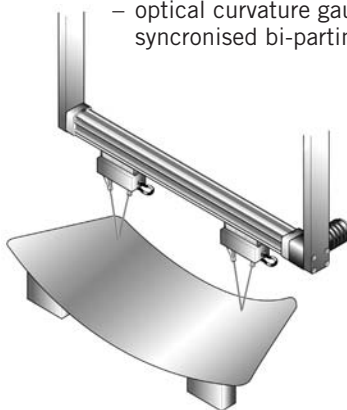


Ventilation Systems

- adjustment of air dampers

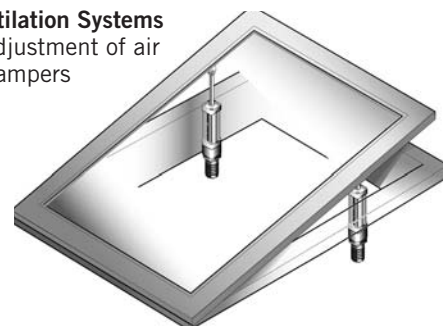


Mobile Lifting Systems

- lifting devices for industrial safety

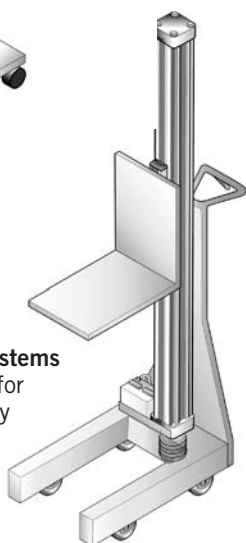


Medical equipments

- adjustment of orthopaedic beds

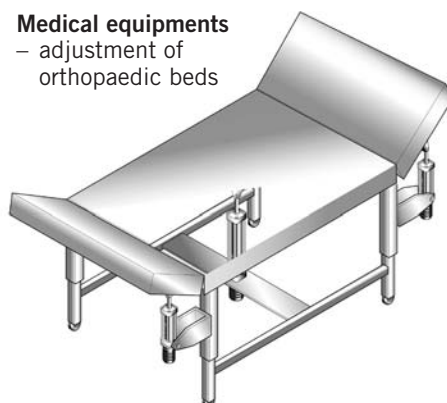

Conveyor Systems

- centring of packages on conveyor lines

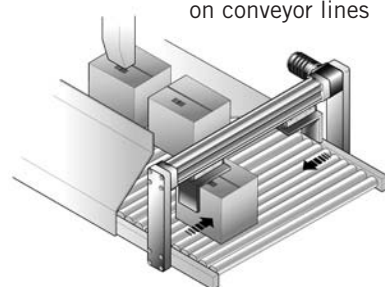

Linear Drive with Toothed Belt and Integrated Guide

– with Recirculating Ball Bearing Guide

– with Roller Guide

Series OSP-E..BHD



Contents

Description	Data Sheet No.	Page
Overview	1.15.001E	11-14
Version with Recirculating Ball Bearing Guide		
Technical Data	1.15.002E-1 to 3	15-17
Dimensions	1.15.002E-4, 5	18, 19
Order Instructions	1.15.002E-10	24
Version with Roller Guide		
Technical Data	1.15.002E-6 to 8	19-22
Dimensions	1.15.002E-9	23
Order Instructions	1.15.002E-10	24

LINEAR DRIVE WITH TOOTHED BELT FOR HEAVY DUTY APPLICATIONS

The latest generation of high capacity linear drives, the OSP-E..BHD series combines robustness, precision and high performance. The aesthetic design is easily integrated into any machine constructions by virtue of extremely adaptable mountings.

Linear Drive with Toothed Belt - selective with Integrated Recirculating Ball Bearing Guide or Integrated Roller Guide

Advantages:

- Accurate path and position control
- High force output
- High speed operation
- High load capacity
- Easy installation
- Low maintenance
- Ideal for multi-axis applications



Features:

- Integrated recirculating ball bearing guide or integrated roller guide
- Diverse range of multi-axis connection elements
- Diverse range of accessories and mountings
- Complete motor and control packages
- Optional integrated planetary gearbox
- Special options on request

Take the easy route and load all the dimensions into your system. The file is suitable for all current CAD systems – available on CD-Rom or at www.hoerbiger.com



Version with Integrated Recirculation Ball Bearing Guide

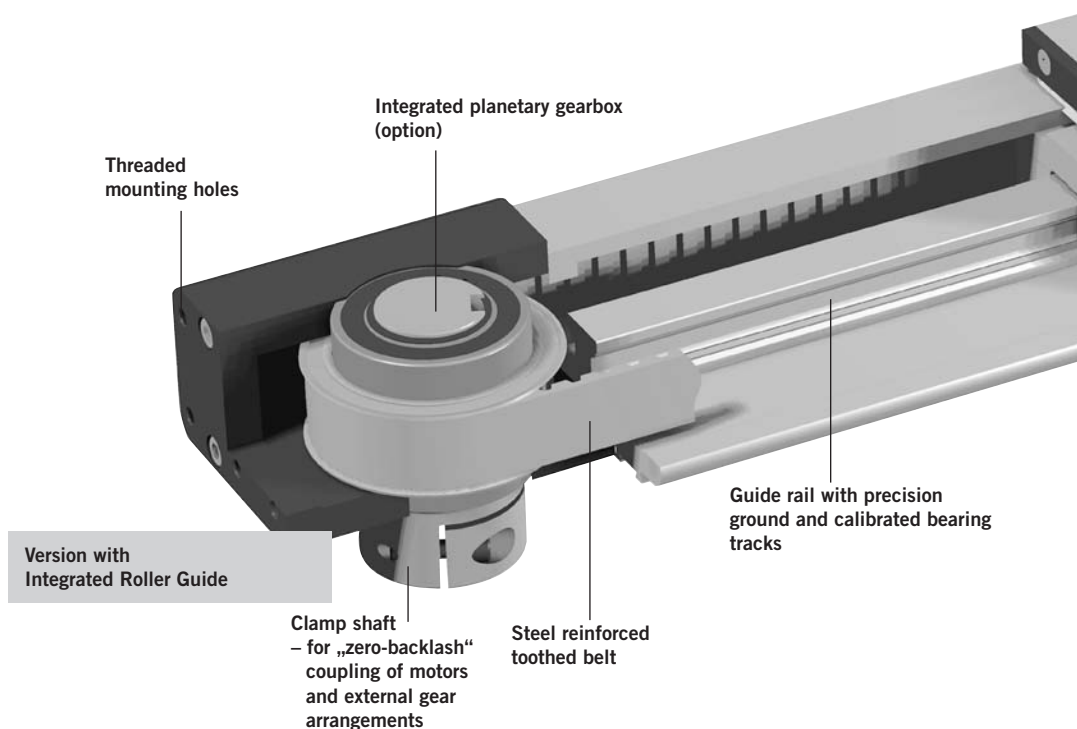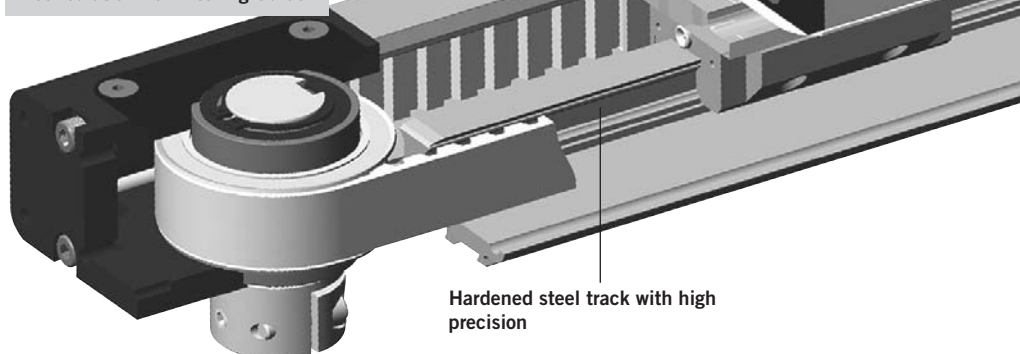


Drive Shaft Versions

Clamp Shaft




Plain Shaft




Drive Shaft OPTIONS


Clamp Shaft and Plain Shaft



Hollow Shaft with Keyway




OPTION
Integrated planetary gearbox





- Highly compact and rigid solution fully integrated in the drive cap housing
- Purpose designed for the BHD series
- Available with three standard ratios (3, 5 and 10)
- Very low backlash
- A wide range of available motor flanges

The dovetailed mounting rails of the new linear actuator expand its function into that of a universal system carrier. Modular system components are simply clamped on


Version with Integrated Recirculating Ball Bearing Guide



Version with Integrated Roller guide

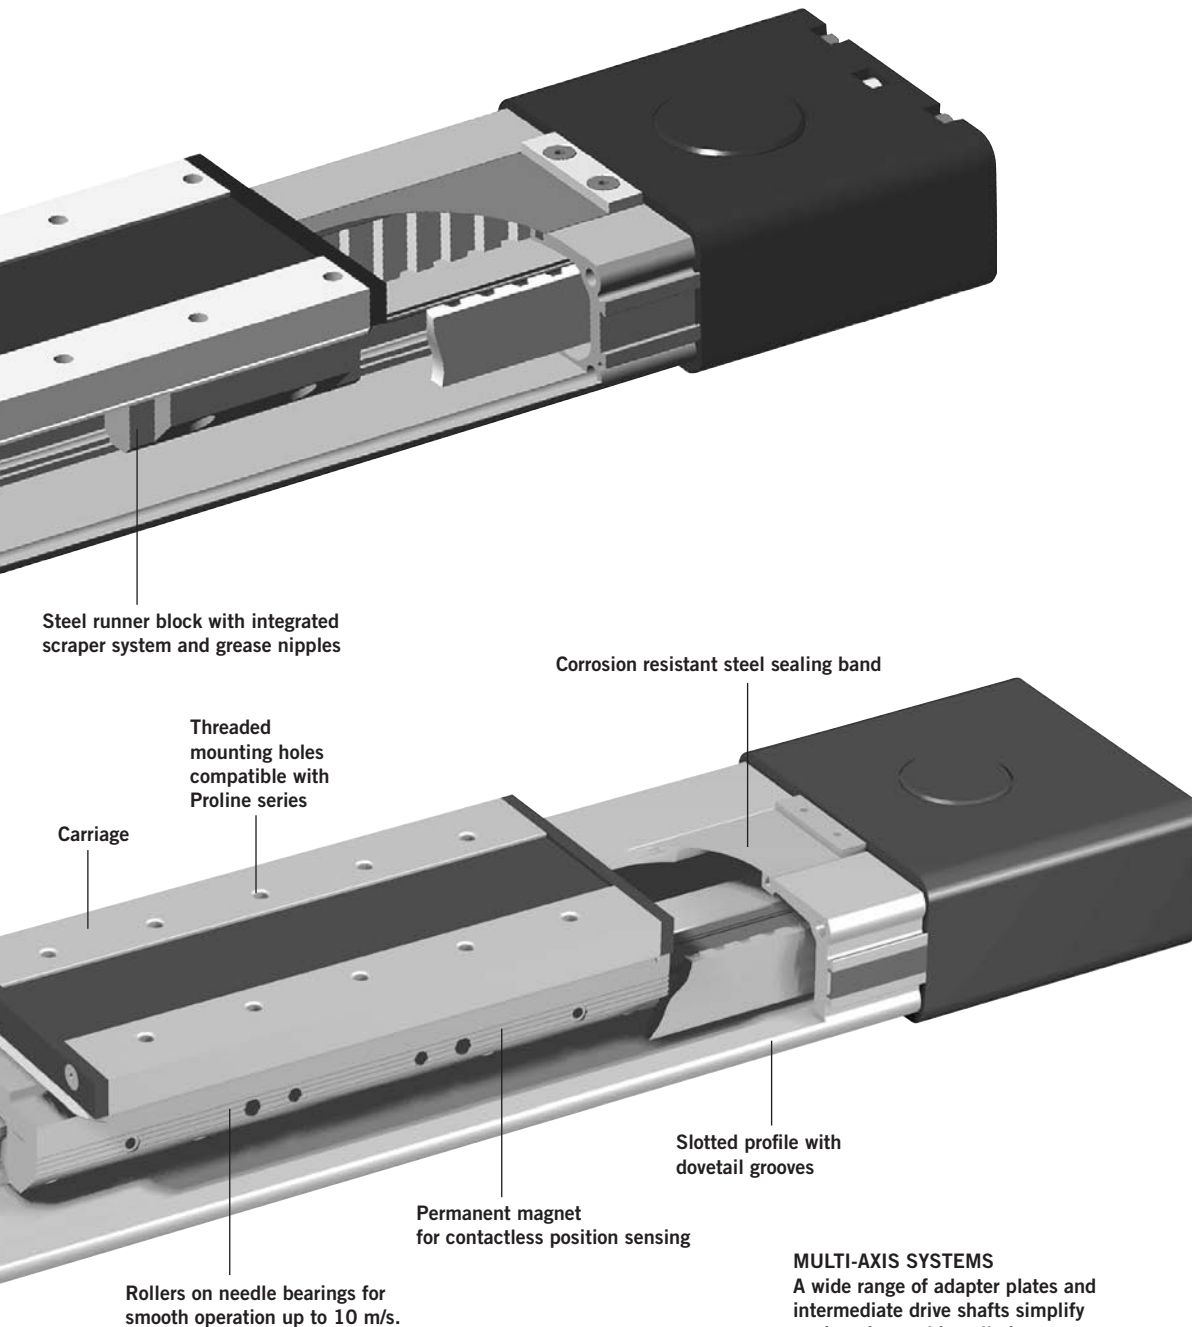

BI-PARTING Version
for perfectly synchronised
bi-parting movements.

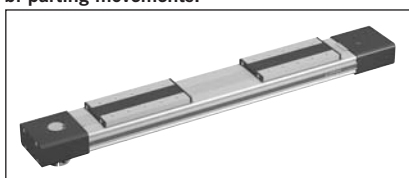

MULTI-AXIS SYSTEMS

A wide range of adapter plates and intermediate drive shafts simplify engineering and installation



OPTIONS AND ACCESSORIES

SERIES OSP-E, LINEAR DRIVE WITH TOOTHED BELT AND INTEGRATED GUIDE

STANDARD VERSIONS OSP-E..BHD


Version with Recirculating Ball Bearing Guide

Data sheets 1.15.002E-1 to 5, 10

Version with Roller Guide

Data sheets 1.15.002E-6 to 10

Standard carrier with integrated guide and magnets for contactless position sensing. Dovetail profile for mounting of accessories and the actuator itself.



DRIVE SHAFT WITH CLAMP SHAFT




DRIVE SHAFT WITH PLAIN SHAFT



ACTUATING DIRECTION

Data sheet 1.15.002E-10

Important in parallel operations, e.g. with intermediate drive shaft



Standard

Standard –
Bi-Parting
Version

OPTIONS

TANDEM

Data sheet 1.15.002E

For higher moment support.



BI-PARTING VERSION

Data sheet 1.15.002E

For perfectly synchronised bi-parting movements.



DRIVE SHAFT WITH CLAMP SHAFT AND PLAIN SHAFT

For connections with intermediate drive shaft
(Data sheet 1.38.004E)



HOLLOW SHAFT WITH KEYWAY

For close coupling of motors and external gears.



INTEGRATED PLANETARY GEARBOX

Data sheet 1.15.002E-5

For compact installation and very low backlash.



ACCESSORIES

MOTOR MOUNTINGS

Data sheet 1.44.00E



END CAP MOUNTING

Data sheet 1.44.010E-2

For mounting the drives on the end cap.



MID-SECTION SUPPORT

Data sheet 1.44.010E-7

For supporting long drives or mounting the linear drives on dovetail grooves.




MAGNETIC SWITCHES

TYPE RS AND ES

Data sheet 1.44.030E


For contactless position sensing of end stop and intermediate carrier positions.



MULTI-AXIS SYSTEMS

Data sheet 1.38.001E

For modular assembly of linear drives up to multi-axis systems.

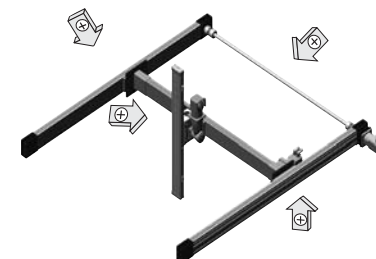

A3P106E00FAG0X

The right to introduce technical
modifications is reserved

Characteristics				
Characteristics		Symbol	Unit	Description
General Features				
Series				OSP-E..BHD
Name				Linear Drive with Toothed Belt and integrated recirculating ball bearing guide
Mounting				See drawings
Ambient-Temperature range	$\varnothing_{\min}$ $\varnothing_{\max}$	°C °C		-30 +80
Weight (mass)		kg		See table
Installation				In any position
Material	Slotted profile			Extruded anodized aluminium
	Toothed belt			Steel-corded polyurethane
	Pulley			Aluminium
	Guide			Recirculating Ball Bearing Guide
	Guide rail			Hardened steel rail with high precision, accuracy class N
	Guide carrier			Steel carrier with integrated wiper system, grease nipples, preloaded 0.02 x C, accuracy class H
	Sealing band			Hardened, corrosion resistant steel
	Screws, nuts			Zinc plated steel
	Mountings			Zinc plated steel and aluminium
Encapsulation class		IP		54

Weight (mass) and Inertia						
Series	Weight (mass)[kg]			Inertia [x 10 ⁻⁶ kgm ²]		
	At stroke 0 m	Add per metre stroke	Moving mass	At stroke 0 m	Add per metre stroke	per kg mass
OSP-E20BHD	2.8	4	0.8	280	41	413
OSP-E25BHD	4.3	4.5	1.5	1229	227	821
OSP-E32BHD	8.8	7.8	2.6	3945	496	1459
OSP-E50BHD	26	17	7.8	25678	1738	3103
OSP-E20BHD*	4.3	4	1.5	540	41	413
OSP-E25BHD*	6.7	4.5	2.8	2353	227	821
OSP-E32BHD*	13.5	7.8	5.2	7733	496	1459
OSP-E50BHD*	40	17	15	49180	1738	3103

* Version: Tandem and Bi-parting (Option)

Installation Instructions

Use the threaded holes in the end cap for mounting the linear drive. Check if mid-section supports are needed using the maximum allowable unsupported length graph on data sheet 1.15.002E-3.

At least one end cap must be secured to prevent axial sliding when mid-section support is used.

Maintenance

Depending on operating conditions, inspection of the linear drive is recommended after 12 months or 3000 km operation.

Please refer to the operating instructions supplied with the drive.

First service start-up

The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the linear drive machine into service, the user must ensure the adherence to the EC Machine Directive 91/368/EEC.

Linear Drive with Toothed Belt and Integrated Recirculating Ball Bearing Guide Series OSP-E..BHD Size 20 to 50



Standard Versions

- Toothed Belt Drive with integrated Recirculating Ball Bearing Guide
- Drive Shaft with clamp shaft or plain shaft
- Choice of motor mounting side
- Dovetail profile for mounting of accessories and the drive itself

Options

- Tandem version for higher moments
- Bi-parting version for synchronised movements
- Integrated planetary gearbox
- Drive shaft with
 - clamp shaft and plain shaft
 - hollow shaft with keyway
- Special drive shaft versions on request



Magnetic Switches see 1.44.030E
Mountings and Accessories see 1.44.006E, 1.44.010E
Multi-Axis Systems see 1.38.001E

Sizing Performance Overview

Maximum Loadings

Sizing of Linear Drive

The following steps are recommended:

1. Determination of the lever arm length l_x , l_y and l_z from m_e to the centre axis of the linear drive.
2. Calculation of the load F_x or F_y to the carrier caused by m_e
 $F = m_e \cdot g$
3. Calculation of the static and dynamic force F_A which must be transmitted by the toothed belt.
 $F_{A(\text{horizontal})} = F_a + F_0 = m_g \cdot a + M_0 \cdot 2\pi / U_{ZR}$
 $F_{A(\text{vertical})} = F_g + F_a + F_0$
 $= m_g \cdot g + m_g \cdot a + M_0 \cdot 2\pi / U_{ZR}$
4. Calculation of all static and dynamic moments M_x , M_y and M_z which occur in the application.
 $M = F \cdot l$
5. Selection of maximum permissible loads via Table T3.
6. Calculation and checking of the combined load, which must not be higher than 1.
7. Checking of the maximum torque that occurs at the drive shaft in Table T2.
8. Checking of the required action force F_A with the permissible load value from Table T1.

For motor sizing, the effective torque must be determined, taking into account the cycle time.

Legend

- l = distance of a mass in the x-, y- and z-direction from the guide [m]
 m_e = external moved mass [kg]
 m_{LA} = moved mass of linear drive [kg]
 m_g = total moved mass ($m_e + m_{LA}$) [kg]
 $F_{x/y}$ = load exerted on the carrier in dependence of the installation position [N]
 F_A = action force [N]
 M_0 = no-load torque [Nm]
 U_{ZR} = circumference of the pulley (linear movement per revolution) [m]
 g = gravity [m/s²]
 a_{max} = maximum acceleration [m/s²]

Performance Overview						T1
Characteristics	Unit	Description				
Series		OSP-E20BHD	OSP-E25BHD	OSP-E32BHD	OSP-E50BHD	
Max. speed	[m/s]	3 ¹⁾	5 ¹⁾	5 ¹⁾	5 ¹⁾	
Linear motion per revolution of drive shaft	[mm]	125	180	240	350	
Max. rpm on drive shaft	[min ⁻¹]	2000	1700	1250	860	
Max. effective	< 1 m/s:	[N]	550	1070	1870	3120
Action force	1-3 m/s:	[N]	450	890	1560	2660
F_A at speed	> 3 m/s:	[N]	–	550	1030	1940
No-load torque	[Nm]	0.6	1.2	2.2	3.2	
Max. acceleration/deceleration	[m/s ²]	50	50	50	50	
Repeatability	[mm/m]	±0.05	±0.05	±0.05	±0.05	
Max. standard stroke length	[mm]	5760 ²⁾	5700 ²⁾	5600 ²⁾	5500 ²⁾	

¹⁾ up to 10 m/s on request

²⁾ longer strokes on request

Maximum Permissible Torque on Drive Shaft Speed / Stroke															T2
OSP-E20BHD				OSP-E25BHD				OSP-E32BHD				OSP-E50BHD			
Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed [m/s]	Torque [Nm]	Stroke [m]	Moment [Nm]	Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]
1	11	1	11	1	31	1	31	1	71	1	71	1	174	1	174
2	10	2	11	2	28	2	31	2	65	2	71	2	159	2	174
3	9	3	8	3	25	3	31	3	59	3	60	3	153	3	138
4		4	7	4	23	4	25	4	56	4	47	4	143	4	108
5		5	5	5	22	5	21	5	52	5	38	5	135	5	89

Important:

The maximum permissible moment on the drive shaft is the lowest value of the speed- or stroke-dependent moment value.

Example above:

OSP-E25BHD, stroke 5 m, required speed 3 m/s from table T2
 speed 3 m/s gives 25 Nm and stroke 5 m gives 21 Nm. Max. torque for this application is 21 Nm.

When sizing Bi-parting units: for ordering stroke see data sheet 1.15.002E-4.

Maximum Permissible Loads						T3
Series	Max. applied load		Max. moments [Nm]			
	F_y [N]	F_z [N]	M_x	M_y	M_z	
OSP-E20BHD	1600	1600	21	150	150	
OSP-E25BHD	2000	3000	50	500	500	
OSP-E32BHD	5000	10000	120	1000	1400	
OSP-E50BHD	12000	15000	180	1800	2500	

Combined Loads

If the linear drive is subjected to several forces, loads and moments at the same time, the maximum load is


calculated with the equation shown here. The maximum permissible loads must not be exceeded.

Equation for Combined Loads

$$\frac{F_y}{F_y(\max)} + \frac{F_z}{F_z(\max)} + \frac{M_x}{M_x(\max)} + \frac{M_y}{M_y(\max)} + \frac{M_z}{M_z(\max)} \leq 1$$

The total of the loads must not exceed >1 under any circumstances.

Forces, loads and moments


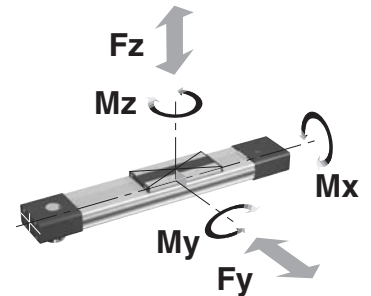


The distance (l_x, l_y, l_z) for calculation of moments relates to the centre axis of the linear drive. Bending moments are calculated from the centre of the linear drive and F indicates actual force.

$$M = F \cdot l \text{ [Nm]}$$

$$\begin{aligned} M_x &= M_{x \text{ static}} + M_{x \text{ dynamic}} \\ M_y &= M_{y \text{ static}} + M_{y \text{ dynamic}} \\ M_z &= M_{z \text{ static}} + M_{z \text{ dynamic}} \end{aligned}$$

Maximum Permissible Unsupported Length – Placing of Mid-Section Support

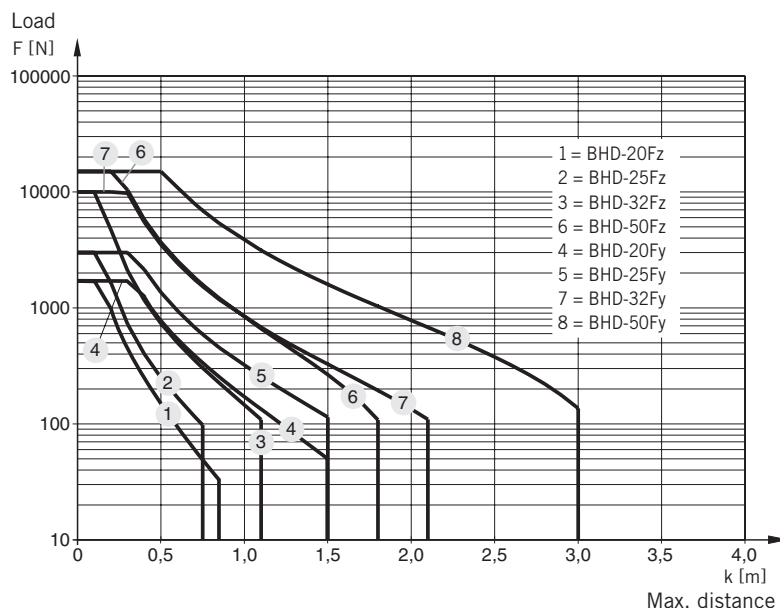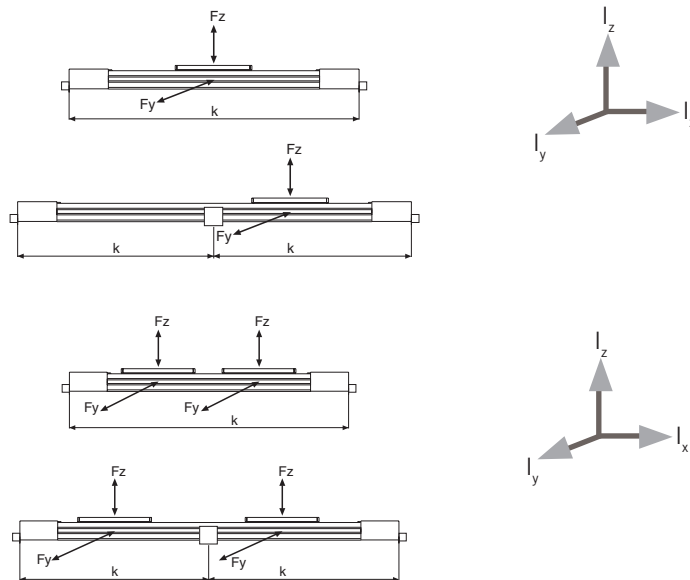

Maximum Permissible Unsupported Length

Stroke Length

The stroke lengths of the linear drives are available in multiples of 1 mm up to 5700 mm.

Other stroke lengths are available on request.

The end of stroke must not be used as a mechanical stop.

Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 100 mm.

The use of an AC motor with frequency converter normally requires a larger clearance than that required for servo systems.

For advice, please contact your local HOERBIGER-ORIGA technical support department.

* For Bi-parting version the max. load (F) is the total load of both carriers

$$F = F_{\text{carrier 1}} + F_{\text{carrier 2}}$$



k = Max. permissible distance between mountings/mid-section support for a given load F .

When loadings are below or up to the curve in the graph below the deflection will be max. 0.01 % of distance k .


Linear Drive with Toothed Belt and integrated Recirculating Ball Bearing Guide – Basic Unit Series OSP-E..BHD

Drive Shaft versions with

- clamp shaft
- plain shaft or
- clamp shaft with plain shaft (Option)

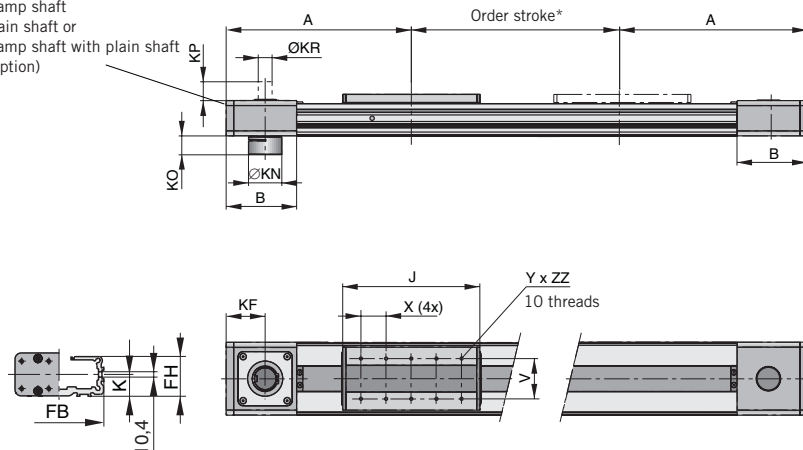


Mounting holes for motor flange or external planetary gearbox ¹⁾



Hollow shaft with keyway (Option)

Dimension Table [mm]

Series	KB*	KC	KL	KT	KU x KJ
OSP-E20BHD	12 ^{H7}	13.8	4	65.7	M6 x 8
OSP-E25BHD	16 ^{H7}	18.3	5	82	M8 x 8
OSP-E32BHD	22 ^{H7}	24.8	6	106	M10 x 12
OSP-E50BHD	32 ^{H7}	35.3	10	144	M12 x 19



¹⁾ Note:

The mounting holes for the coupling housing / motor flange / gearbox are located on the opposite side to the carrier (motor mounting standard). They also can be located on the same side as the carrier (motor mounting 180° standard).

* Note:


The mechanical end position must not be used as a mechanical end stop. Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 100 mm.

Order stroke = required travel + 2 x safety distance.

The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems.


For further information please contact your local HOERBIGER-ORIGA representative.

Option – Tandem Series OSP-E..BHD

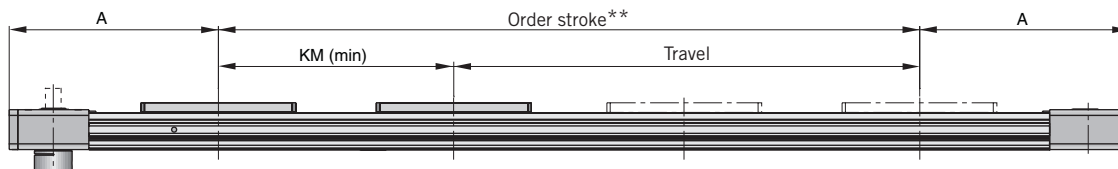

** Order stroke = required travel + KM min + 2 x safety distance

Option – Bi-Parting Series OSP-E..BHD

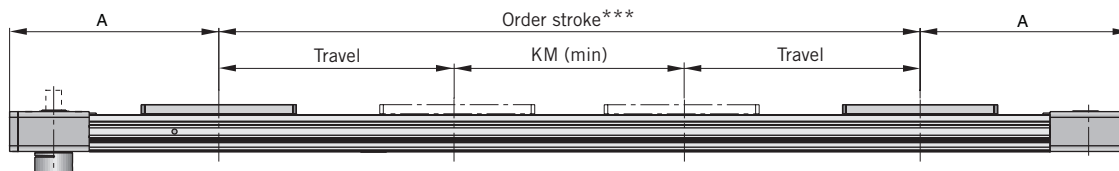


*** Order stroke = 2 x required travel + KM min + 2 x safety distance

Dimension Table [mm]

Series	A	B	C	E	GxH	J	K	M	S	V	X	YxZZ	CE	CF	EC	EF	FB	FH	KF	K _{min}	K _{rec.}	KN	KO	KP	KR	KS	KT	KUxKJ
OSP-E20BHD	185	76.5	73	18	M5x8.5	155	21.1	27.6	67	51	30	M5x8	38	49	60	27	73	36	42.5	180	220	27	18	25	12 _{H7}	12 ^{H7}	65.7	M6x8
OSP-E25BHD	218	88	93	25	M5x10	178	21.5	31	85	64	40	M6x8	42	52.5	79	27	92	39.5	49	210	250	34	21.7	30	16 _{H7}	16 ^{H7}	82	M8x8
OSP-E32BHD	262	112	116	28	M6x12	218	28.5	38	100	64	40	M6x10	56	66.5	100	36	116	51.7	62	250	300	53	30	30	22 _{H7}	22 ^{H7}	106	M10x12
OSP-E50BHD	347	147	175	18	M6x12	288	43	49	124	90	60	M6x10	87	92.5	158	70	164	77	79.5	354	400	75	41	35	32 _{H7}	32 ^{H7}	144	M12x19

(Other dimensions for KS and KB for special drive shafts on request – see order instructions.)

Series OSP-E..BHD – with Integrated Planetary Gearbox (Option)

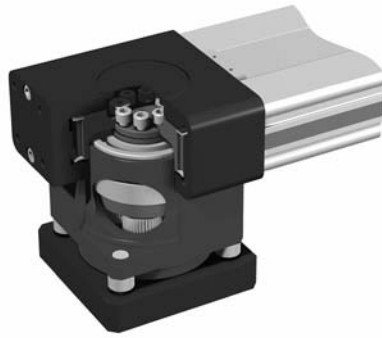

Integrated Planetary Gearbox

Features

- Highly compact and rigid solution fully integrated in the drive cap housing
- Purpose designed for the BHD series.
- Available with three standard ratios (3, 5 and 10)
- Very low backlash
- A wide range of available motor flanges

Please contact your local HOERBIGER-ORIGA technical support for available motor flanges.

For motors and controllers, see separate catalogue "Drive technology for electric linear drives OSP-E".

Material:
Aluminium (AL-H) / Steel (St-H)

Standard Version:

- Gearbox on opposite side to carrier.


Note:

When ordering, specify model/type of motor and manufacturer for correct motor flange.

Performance Overview

Characteristics		Unit	Description		
Series			OSP-E25BHD	OSP-E32BHD	OSP-E50BHD
Ratio (1-stage)	i		3/5/10		
Max. axial load	F_{amax}	[N]	1550	1900	4000
Torsional rigidity (i=5)	$C_{t,21}$	[Nm/arcmin]	3.3	9	24
Torsional rigidity (i=3/10)	$C_{t,21}$	[Nm/arcmin]	2.8	7.5	20.5
Torsional backlash	J_t	[arcmin]	<12		
Linear motion per revolution of drive shaft		[mm]	220	280	360
Nominal input speed	n_{nom}	[min ⁻¹]	3700	3400	2600
Max. input speed	n_{1max}	[min ⁻¹]	6000		
No-load torque at Nominal input speed	T_{012}	[Nm]	<0.14	<0.51	<1.5
Lifetime		[h]	20 000		
Efficiency	η	[%]	>97		
Noise level ($n_1=3000 \text{ min}^{-1}$)	L_{PA}	[db]	<70	<72	<74

Dimensions

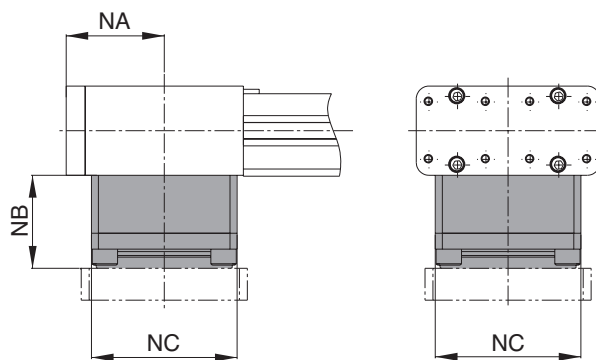

Dimension Table [mm] and additional Weight

Series	NA	NB	NC	Weight (Mass) [kg]
OSP-E25BHD	49	43	76	2.6
OSP-E32BHD	62	47	92	4.9
OSP-E50BHD	79.5	49.5	121	9.6

Linear Drive with Toothed Belt and Integrated Roller Guide

Series OSP-E..BHD
Size 25, 32, 50




Standard Versions

- Toothed Belt Drive with integrated Recirculating Ball Bearing Guide
- Drive Shaft with clamp shaft or plain shaft
- Choice of motor mounting side
- Dovetail profile for mounting of accessories and the drive itself

Options

- Tandem version for higher moments
- Bi-parting version for synchronised movements
- Integrated planetary gearbox
- Drive shaft with
 - clamp shaft and plain shaft
 - hollow shaft with keyway
- Special drive shaft versions on request

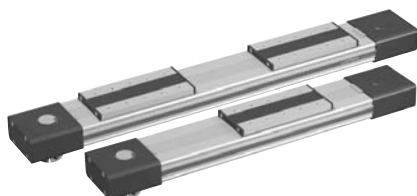

Characteristics			
Characteristics	Symbol	Unit	Description
General Features			
Series			OSP-E..BHD
Name			Linear Drive with Toothed Belt and integrated Roller Guide
Mounting			see drawings
Ambient Temperature range	$\varnothing_{\min}$ $\varnothing_{\max}$	°C °C	-30 +80
Weight (Mass)		kg	see table
Installation			In any position
Material	Slotted profile		Extruded anodized aluminium
	Toothed belt		Steel-corded polyurethane
	Pulley		Aluminium
	Guide		Roller Guide
	Guide rail		Aluminium
	Track		high alloyed steel
	Roller cartridge		Steel rollers in aluminium housing
	Sealing band		Hardened, corrosion resistant steel
	Screws, nuts		Zinc plated steel
	Mountings		Zinc plated steel and aluminium
Encapsulation class		IP	54

Weight (mass) and Inertia

Series	Weight (mass)[kg]			Inertia [x 10 ⁻⁶ kgm ²]	
	at stroke 0 m	ad per metre stroke	Moving mass	at stroke 0 m	ad per metre stroke
OSP-E25BHD	3.8	4.3	1.0	984	197
OSP-E32BHD	7.7	6.7	1.9	3498	438
OSP-E50BHD	22.6	15.2	4.7	19690	1489
OSP-E25BHD*	5.7	4.3	2.0	1805	197
OSP-E32BHD*	11.3	6.7	3.8	6358	438
OSP-E50BHD*	31.7	15.2	9.4	34274	1489

*Version: Tandem and Bi-parting (Option)

Installation Instructions

Use the threaded holes in the end cap for mounting the linear drive. Check if mid-section supports are needed using the maximum allowable unsupported length graph on data sheet 1.15.002E-3. At least one end cap must be secured to prevent axial sliding when mid-section support is used.

Maintenance

All moving parts are lifetime-lubricated. Depending on operating conditions, inspection of the linear drive is recommended after 12 months or 3000 km operation. Please refer to the operating instructions supplied with the drive.

First service start-up

The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the linear drive machine into service, the user must ensure the adherence to the EC Machine Directive 91/368/EEC.

Magnetic Switches Proximity Sensors see 1.44.030E
Mountings and Accessories see 1.44.006E, 1.44.010E
Multi-Axis Connections see 1.38.001E

Performance Overview T1				
Characteristics	Unit	Description		
Series		OSP-E25BHD	OSP-E32BHD	OSP-E50BHD
Max. speed	[m/s]	10	10	10
Linear motion per revolution drive shaft	[mm]	180	240	350
Max. rpm. drive shaft	[min ⁻¹]	3000	2500	1700
Max. effective action force F_A	< 1 m/s: [N]	1070	1870	3120
	1-3 m/s: [N]	890	1560	2660
	> 3-10 m/s: [N]	550	1030	1940
No-load torque [Nm]	1.2	2.2	3.2	
Max. acceleration/deceleration	[m/s ²]	40	40	40
Repeatability	[mm/m]	±0.05	±0.05	±0.05
Max. standard stroke length	[mm]	7000	7000	7000

Maximum Permissible Torque on Drive Shaft Speed and Stroke T2											
OSP-E25BHD				OSP-E32BHD				OSP-E50BHD			
Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed. [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed. [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]
1	31	1	31	1	71	1	71	1	174	1	174
2	28	2	31	2	65	2	71	2	159	2	174
3	25	3	31	3	59	3	60	3	153	3	138
4	23	4	25	4	56	4	47	4	143	4	108
5	22	5	21	5	52	5	38	5	135	5	89
6	21	6	17	6	50	6	32	6	132	6	76
7	19	7	15	7	47	7	28	7	126	7	66
8	18			8	46			8	120		
9	17			9	44			9	116		
10	16			10	39			10	108		

Important:

The maximum permissible moment on the drive shaft is the lowest value of the speed- or stroke-dependent moment value.

Example above:

OSP-E25BHD, stroke 5 m, required speed 3 m/s from table T2
 speed 3 m/s gives 25 Nm and stroke 5 m gives 21 Nm. Max. torque for this application is 21 Nm.
 When sizing Bi-parting units: for ordering stroke see data sheet 1.15.002E-9.

Maximum Permissible Loads T3				
Series	Max. applied load F_y, F_z [N]	Max. moments [Nm]		
		M_x	M_y	M_z
OSP-E25BHD	986	11	64	64
OSP-E32BHD	1348	19	115	115
OSP-E50BHD	3704	87	365	365

Sizing Performance Overview

Maximum Loadings

Sizing of Linear Drive

The following steps are recommended:


1. Determination of the lever arm length l_x, l_y and l_z from m_e to the centre axis of the linear drive.
2. Calculation of the load F_x or F_y to the carrier caused by m_e
 $F = m_e \cdot g$
3. Calculation of the static and dynamic force F_A which must be transmitted by the toothed belt.
 $F_{A(horizontal)} = F_a + F_0 = m_g \cdot a + M_0 \cdot 2\pi / U_{ZR}$
 $F_{A(vertical)} = F_g + F_a + F_0 = m_g \cdot g + m_g \cdot a + M_0 \cdot 2\pi / U_{ZR}$
4. Calculation of all static and dynamic bending moments M_x, M_y and M_z which occur in the application
 $M = F \cdot l$
5. Selection of maximum permissible loads via Table T3.
6. Calculation and checking of the combined load, which must not be higher than 1.
7. Checking of the maximum torque that occurs at the drive shaft in Table T2.
8. Checking of the required action force F_A with the permissible load value from Table T1.

For motor sizing, the effective torque must be determined, taking into account the cycle time.

Legend

- l = distance of a mass in the x-, y- and z-direction from the guide [m]
- m_e = external moved mass [kg]
- m_{LA} = moved mass of linear drive [kg]
- m_g = total moved mass ($m_e + m_{LA}$) [kg]
- $F_{x/y}$ = load exerted on the carrier in dependence of the installation position [N]
- F_A = action force [N]
- M_0 = no-load torque [Nm]
- U_{ZR} = circumference of the pulley (linear movement per revolution) [m]
- g = gravity [m/s²]
- a_{max} = maximum acceleration [m/s²]

Forces, loads and moments



$$M = F \cdot l \text{ [Nm]}$$

$$M_x = M_{x \text{ static}} + M_{x \text{ dynamic}}$$

$$M_y = M_{y \text{ static}} + M_{y \text{ dynamic}}$$

$$M_z = M_{z \text{ static}} + M_{z \text{ dynamic}}$$

The distance l (l_x , l_y , l_z) for calculation of moments relates to the centre axis of the linear drive.

Combined Loads

If the linear drive is subjected to several forces, loads and moments at the same time, the maximum load is

calculated with the equation shown here. The maximum permissible loads must not be exceeded.

Equation for Combined Loads

$$\frac{F_y}{F_y(\max)} + \frac{F_z}{F_z(\max)} + \frac{M_x}{M_x(\max)} + \frac{M_y}{M_y(\max)} + \frac{M_z}{M_z(\max)} \leq 1$$

The total of the loads must not exceed >1 under any circumstances.

Maximum Permissible Unsupported Length

Stroke Length

The stroke lengths of the linear drives are available in multiples of 1 mm up to 5700 mm.

Other stroke lengths are available on request.

The end of stroke must not be used as a mechanical stop.

Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 100 mm.

The use of an AC motor with frequency converter normally requires a larger clearance than that required for servo systems.

For advice, please contact your local HOERBIGER-ORIGA technical support department.


* For the bi-parting version the maximum load (F) complies with the total of the load at both carriers.

$$F = F_{\text{carriage 1}} + F_{\text{carriage 2}}$$


k = Maximum permissible distance between mountings/mid-section support for a given load F .

If the loads are below or up to the curve in the graph the deflection will be max. 0.01 % of distance k .


Maximum Permissible Unsupported Length – Placing of Mid-Section Support

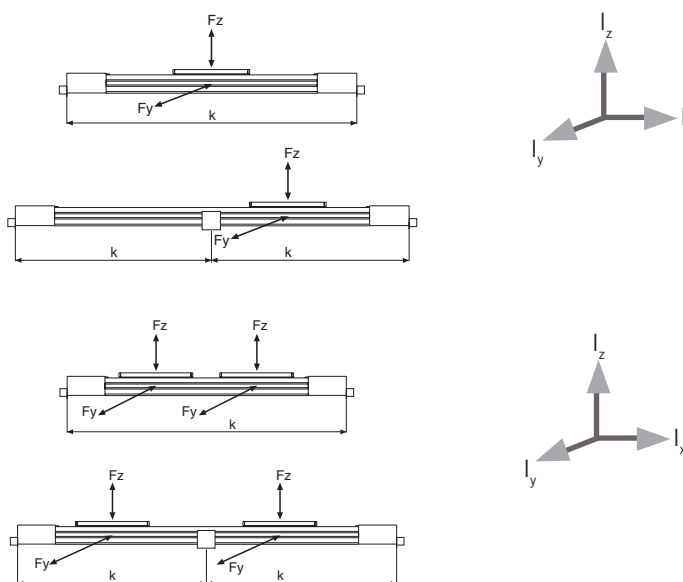

Loads

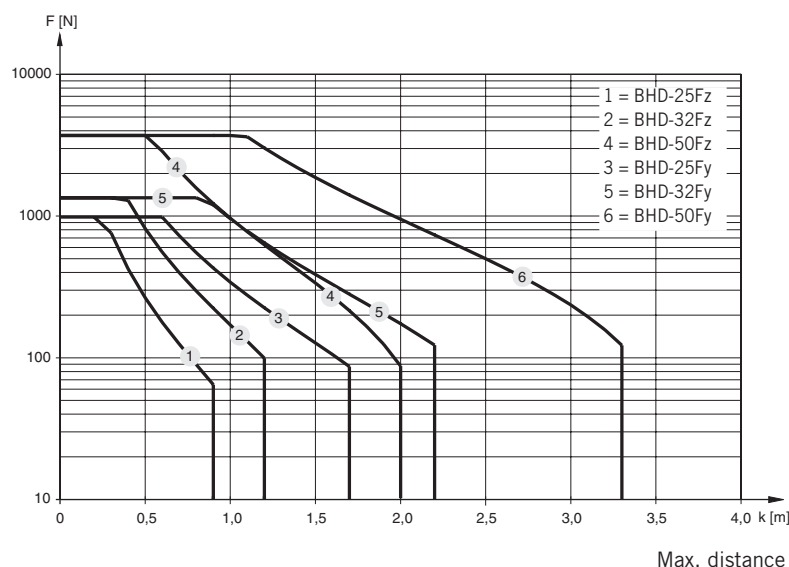

Linear Drive with Toothed Belt and Integrated Roller Guide – Basic Unit Series OSP-E..BHD

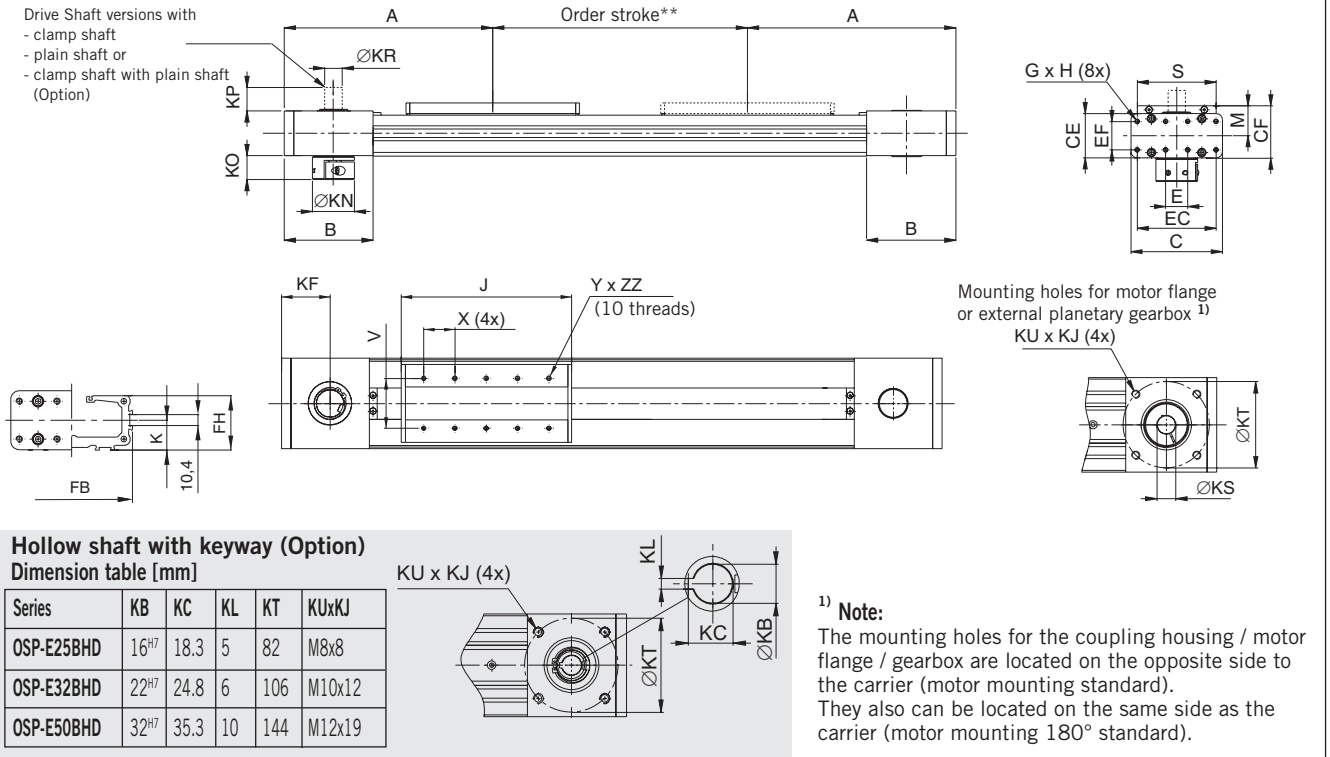

* Note:

The mechanical end position must not be used as a mechanical end stop.


Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 100 mm.

Order stroke = required travel + 2 x safety distance.

The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems.


For further information please contact your local HOERBIGER-ORIGA representative.

Option – Tandem Series OSP-E..BHD

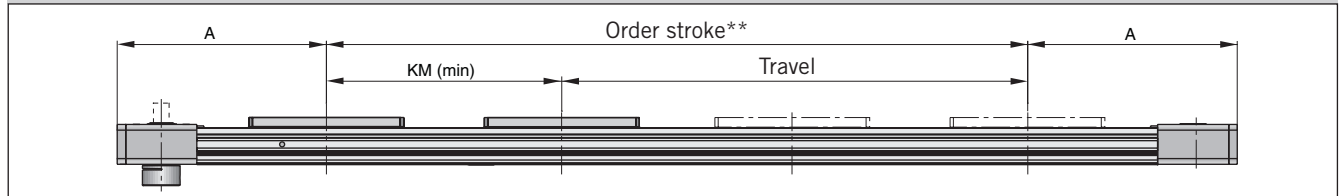

** Order stroke = required travel + KM min + 2 x safety distance

Options – Bi-Parting Series OSP-E..BHD

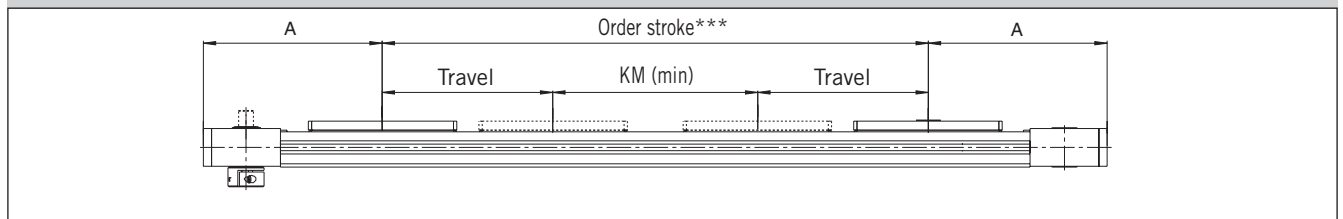

*** Order stroke = 2 x required travel + KM min + 2 x safety distance

Dimension Table [mm]

Series	A	B	C	E	GxH	J	K	M	S	V	X	YxZZ	CE	CF	EC	EF	FB	FH	KF	KM _{min}	KM _{rec.}	KN	KO	KP	KR	KS	KT	KUxKJ
OSP-E25BHD	218	88	93	25	M5x10	178	21.5	31	85	64	40	M6x8	42	52.5	79	27	92	39.5	49	210	250	34	21.7	30	16 _{H7}	16 _{H7}	82	M8x8
OSP-E32BHD	262	112	116	28	M6x12	218	28.5	38	100	64	40	M6x10	56	66.5	100	36	116	51.7	62	250	300	53	30	30	22 _{H7}	22 _{H7}	106	M10x12
OSP-E50BHD	347	147	175	18	M6x12	263	43	49	124	90	60	M6x10	87	92.5	158	70	164	77	79.5	295	350	75	41	35	32 _{H7}	32 _{H7}	144	M12x19

(Other dimensions for KS and KB for special drive shafts on request – see order instructions.)





Order Instructions

OSP-E	25	-	6	0	0	0	2	-	00500
-------	----	---	---	---	---	---	---	---	-------

Size	
20	Size 20 (only drive 6)
25	Size 25
32	Size 25
50	Size 25

Type of Drive	
5	Toothed Belt with integrated roller guide
6	Toothed Belt with integrated recirculating ball bearing guide

Carrier Mounting	
0	Standard
1	Tandem (Option)
2	Bi-parting (Option)

Operating direction	
0	Standard 
1	Standard 
2	Bi-parting 
3	Bi-parting 




Integrated Gearbox (Option) for size 25 to 50		
0	without	
1	ratio i=3	
2	ratio i=5	
3	ratio i=10	
4	ratio i=3	
5	ratio i=5	
6	ratio i=10	

Stroke
Input (five digits) in mm

Drive Shaft		
Side where motor is fitted see M		
A	Plain shaft	
B	Plain shaft	
2	Clamp shaft	
3	Clamp shaft with plain shaft (Option)	
4	Clamp shaft	
5	Clamp shaft with plain shaft (Option)	
6	Hollow shaft with keyway (Option)	
7	Hollow shaft with keyway (Option)	
Special drive shaft on request		


Accessories - please order separately

Description	Data Sheet No.
Coupling Housing	1.44.006E-2
Motor Flange for Planetary Gearbox LP	1.44.006E-2
End Cap Mountings	1.44.010E-2, -3
Mid-Section Support	1.44.010E-8
Adaptor Profile	1.44.010E-10
T-Nut Profile	1.44.010E-11
Magnetic Switches	1.44.030E
Multi-Axis Systems for linear drives	1.38.001E
Drive Systems and components for electric linear drives OSP-E	A4P019E

OSP-E.. BHD as parallel drive with intermediate drive shaft MAS-..	
OSP-E..60005-..	
OSP-E..6010A-..	
OSP-E..60003-..	
OSP-E..6010B-..	
	

Data Sheet No. 1.15.002E-10

Vertical Linear Drive with Toothed Belt and Integrated Recirculating Ball Bearing Guide Series OSP-E..BV

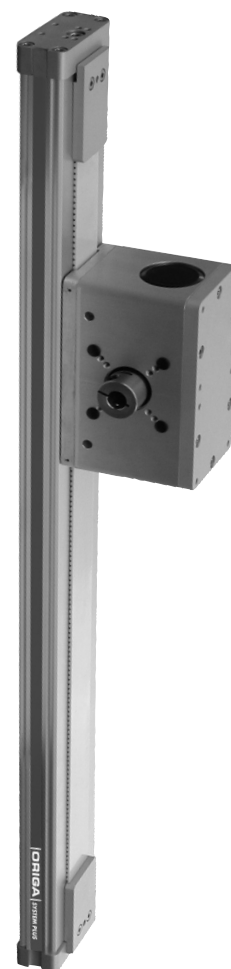

Contents

Description	Data Sheet No.	Page
Overview	1.20.015E	25-28
Technical Data	1.20.016E-1 to 3	29-33
Dimensions	1.20.016E-3 to 5	34
Order Instructions	1.20.016E-6	35

TOOTHED BELT DRIVE FOR VERTICAL MOVEMENTS IN MULTI-AXIS SYSTEMS

The OSP-E..BV vertical linear drive with toothed belt and integrated recirculating ball bearing guide has been specially developed for lifting movements in the Z-axis. The especially low vibration OSP-E..BV vertical drive in combination with the heavy duty series OSP-E..BHD meets the highest demands in portal and handling applications.


Vertical Linear Drive with Toothed Belt and integrated Recirculating Ball Bearing Guide


Advantages

- Fixed drive head for low moving mass
- Integrated recirculating ball bearing guide for high bending moments
- Magnetic switch set for contactless position sensing
- Easy to install
- Low maintenance

Features

- High acceleration and speed
- Drive Shaft versions with clamp shaft or plain shaft
- Power transmission by toothed belt
- Moving axis profile
- Complete motor and control packages

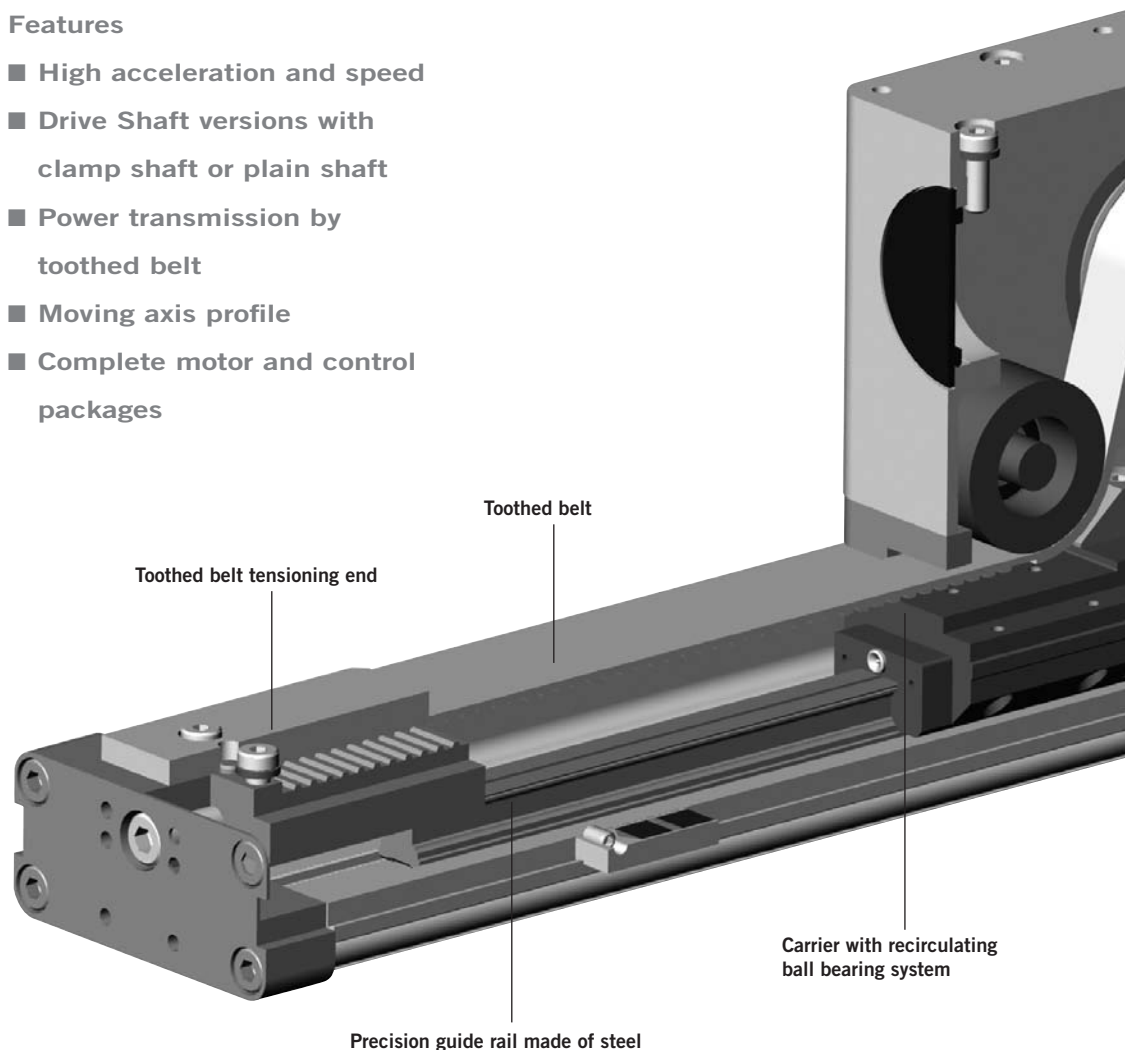

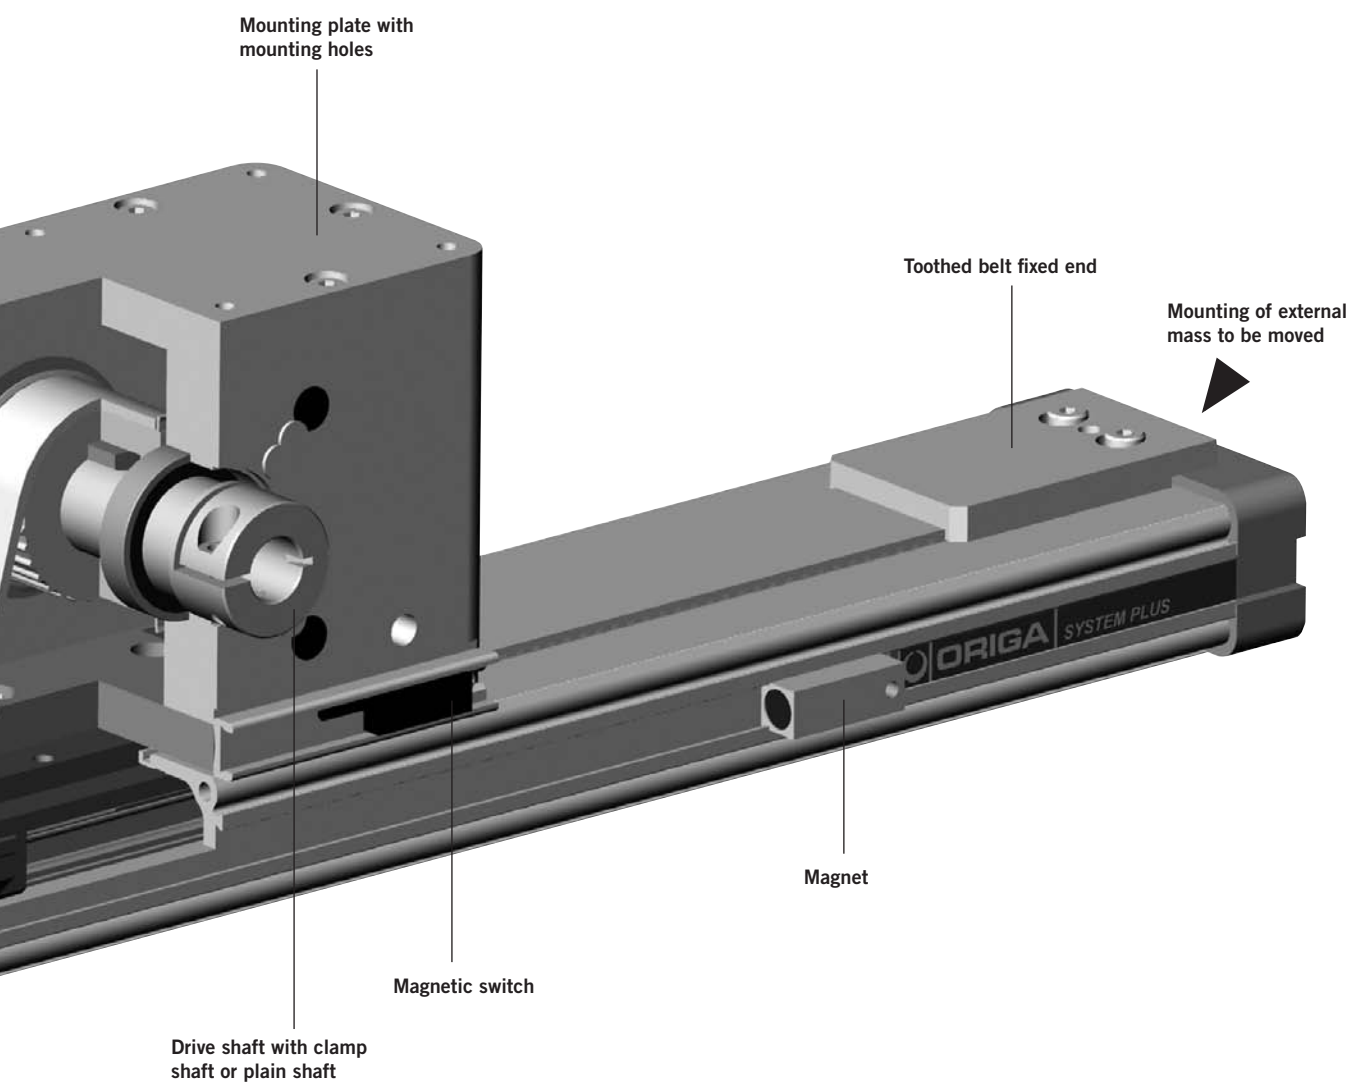

Take the easy route and load all the dimensions into your system. The file is suitable for all current CAD systems – available on CD-Rom or at www.hoerbiger.com



OPTIONS AND ACCESSORIES

SERIES OSP-E, VERTICAL LINEAR DRIVE WITH TOOTHED BELT AND INTEGRATED RECIRCULATING BALL BEARING GUIDE

STANDARD VERSION OSP-E..BV

Data Sheet No. 1.20.016E-1, -2
Standard drive head with clamp shaft or tenon and integrated recirculating ball bearing guide with two carriers. Choice of side on which gearbox or motor is to be mounted.

Drive Shaft with
Clamp Shaft



Drive Shaft with
Plain Shaft



DRIVE SHAFT
"CLAMP SHAFT AND PLAIN SHAFT"
OR "DOUBLE PLAIN SHAFT"
e.g. for parallel operation of two Z-axes
with an intermediate drive shaft.

Drive Shaft with
Clamp Shaft and
Plain Shaft



Drive Shaft with
Double Plain Shaft



ACCESSORIES


MOTOR MOUNTINGS

Data Sheet No. 1.44.006E-3
For connection of gearbox or motor direct to drive shaft with clamp shaft, or with a motor coupling to drive shaft with plain shaft.



MAGNETIC SWITCHES SET

Data Sheet No. 1.20.016E-4
Magnetic switches with connector, mounting rail and magnets for contactless sensing of the end positions. Cable (suitable for cable chain) can be ordered separately in 5 m, 10 m or 15 m length.



OPTIONS

TANDEM

Data Sheet No. 1.20.016-1, -2
Additional drive head and two additional carriers for higher bending moments.



HOLLOW SHAFT WITH KEYWAY
For direct connection of gearbox or motor with keyway.



MULTI-AXIS SYSTEMS

Data Sheet No. 1.38.001E, 1.38.002E, 1.38.004E
For modular assembly of linear drives up to multi-axis systems.



A3P750E00GAG50X

The right to introduce technical modifications is reserved

Characteristics			
Characteristics	Symbol	Unit	Description
General Features			
Series			OSP-E..BV
Name			Vertical linear drive with toothed Belt and integrated recirculating ball bearing guide
Mounting			See drawings
Temperature range	$\vartheta_{\min}$ $\vartheta_{\max}$	°C °C	-30 +80
Weight (mass)		kg	See table
Installation			vertical
Material	Profile		Extruded anodized aluminium
	Toothed belt		Steel-corded polyurethane
	Pulley		Aluminium
	Guide		Recirculating ball bearing guide
	Guide rail		Hardened steel rail with high precision, accuracy class N
	Guide carrier		Steel carrier with integrated wiper system, grease nipples, preloaded 0.08 x C, accuracy class N
	Screws, nuts		Zinc plated steel
Encapsulating class		IP	20

Weight (mass) and Inertia							
Series	Total weight (Mass) [kg]		Moving mass [kg]		Inertia [x 10 ⁻⁶ kgm ²]		
	At stroke 0 m	Drive head	At stroke 0 m	Add per metre stroke	At Stroke 0 m	Add per metre stroke	Add per kg mass
OSP-E20BV	3.4	1.9	1.6	4.0	486	1144	289
OSP-E25BV	7.7	5.3	2.4	4.4	1695	2668	617.5
OSP-E20BV*	5.3	2 x 1.9	1.6	4.0	533	1144	289
OSP-E25BV*	13	2 x 5.3	2.4	4.4	1915	2668	617.5

* Version: Tandem (Option)

Installation Instructions

Make sure that the OSP-E..BV is always operated with a brake on the drive side. For the mounting of the external mass to be moved there are threaded holes in the end caps. Before mounting, check the correct centre of gravity distance from the table on Data Sheet No. 1.20.016E-3. Mount the external mass on the toothed belt fixed end, so that the belt tension can be checked and adjusted at the toothed belt tensioning end without dismantling.

Maintenance

Depending on operating conditions, inspection of the linear drive is recommended after 12 months or 3000 km operation. Please refer to the operating instructions supplied with the drive.

First service start-up

The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the linear drive machine into service, the user must ensure the adherence to the EC Machine Directive 91/368/EEC.

Vertical Linear Drive with Toothed Belt and Integrated Recirculating Ball Bearing Guide

Series OSP-E..BV Size 20, 25



Standard Version:

- Toothed Belt drive with integrated recirculating ball bearing guide
- Drive shaft with clamp shaft or plain shaft
- Choice of motor mounting side

Options:

- Tandem version for higher moments
- Drive shaft with
 - clamp shaft and plain shaft or double plain shaft
 - hollow shaft with keyway
- Special drive shaft versions on request.



Magnetic Switches see 1.44.030E



Sizing Performance Overview

Maximum Loadings

Sizing of Linear Drive

The following steps are recommended:

1. Determination of the lever arm length l_x , l_y and l_z from m_e to the centre axis of the linear drive.
2. Calculation of the static and dynamic force F_A which must be transmitted by the toothed belt.

$$F_A = F_g + F_a + F_0$$

$$= m_g \cdot g + m_g \cdot a + M_0 \cdot 2\pi / U_{ZR}$$
3. Calculation of all static and dynamic moments M_x , M_y and M_z which occur in the application.
 $M = F \cdot l$
4. Selection of maximum permissible loads via Table T3.
5. Calculation and checking of the combined load, which must not be higher than 1.
6. Checking of the maximum moment that occurs at the drive shaft in Table T2.
7. Checking of the required action force F_A with the permissible load value from Table T1.

For motor sizing, the effective torque must be determined, taking into account the cycle time.

Legend

- l = distance of a mass in the x-, y- and z-direction from the guide [m]
- m_e = external moved mass [kg]
- m_{LA} = moved mass of linear drive [kg]
- m_g = total moved mass ($m_e + m_{LA}$) [kg]
- F_A = action force [N]
- M_0 = no-load torque [Nm]
- U_{ZR} = circumference of the pulley (linear movement per revolution) [m]
- g = gravity [m/s²]
- a_{max} = maximum acceleration [m/s²]

Performance Overview				T1
Characteristics	Unit	Description		
Series		OSP-E20BV	OSP-E25BV	
Max. Speed	[m/s]	3.0	5.0	
Linear motion per revolution of drive shaft	[mm/U]	108	160	
Toothed Belt		35ATL3	40ATL5	
Max. rpm. drive shaft	[min ⁻¹]	1700	1875	
Max. effective action force F_A at speed	1 m/s	[N]	650	1430
	1 - 2 m/s	[N]	450	1200
	> 3 - 5 m/s	[N]	–	1050
No-load torque ²⁾	[Nm]	0.6	1.2	
Max. acceleration/deceleration	[m/s ²]	20	20	
Repeatability	+/- [mm/m]	0.05	0.05	
Max. standard stroke length ¹⁾	[mm]	1000	1500	
Max. recommended permissible mass ³⁾	[kg]	10	20	

¹⁾ Longer strokes on request and only with profile stiffening

²⁾ As a result of static friction force

³⁾ vertical

Max. Permissible Torque on Drive Shaft Speed / Stroke								T2
OSP-E-20BV				OSP-E-25BV				
Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	
1	19	1	17	1	36	1	36	
2	17	2	10.5	2	30	2	36	
3	15.5			3	30			
				4	28			
				5	27			

Important:


The maximum permissible moment on the drive shaft is the lowest value of the speed- or stroke-dependent moment value.

Example above:

OSP-E25BV required speed $v = 3$ m/s and stroke = 1 m.

Accordingly Table T2 shows permissible moments of 30 Nm for the speed and 36 Nm for the stroke. Therefore the maximum moment at the drive shaft is determined by the speed and must not exceed 30 Nm.

Maximum Permissible Loads T3					
Series	Max. applied load		Max. moments		
	Fy[N]	Fz[N]	Mx[Nm]	My[Nm]	Mz[Nm]
OSP-E20BV	1600	1600	20	100	100
OSP-E25BV	2000	3000	50	200	200

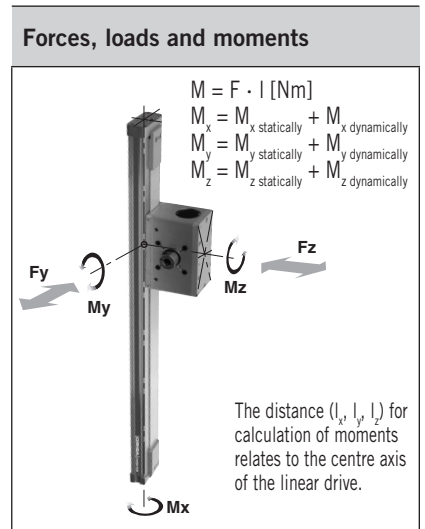

Equation for Combined Loads									
$\frac{F_y}{F_y \text{ (max)}}$	+	$\frac{F_z}{F_z \text{ (max)}}$	+	$\frac{M_x}{M_x \text{ (max)}}$	+	$\frac{M_y}{M_y \text{ (max)}}$	+	$\frac{M_z}{M_z \text{ (max)}}$	≤ 1


The total of the loads must not exceed >1 under any circumstances.

Combined Loads


If the linear drive is subjected to several forces, loads and moments at the same time, the maximum load is calculated with the equation shown here.

The maximum permissible loads must not be exceeded.


Distance of Centre of Gravity of External Mass from Mid-Point of Drive				
Mass [kg]	OSP-E20BV		OSP-E25BV	
	Lever arm l_z [mm]	Max. permissible acceleration/deceleration [m/s ²]	Lever arm l_z [mm]	Max. permissible acceleration/deceleration [m/s ²]
> 3 to 5	0	20	50	20
> 5 to 10	0	20	40	20
> 10 to 15	-	-	35	20
> 15 to 20	-	-	30	15

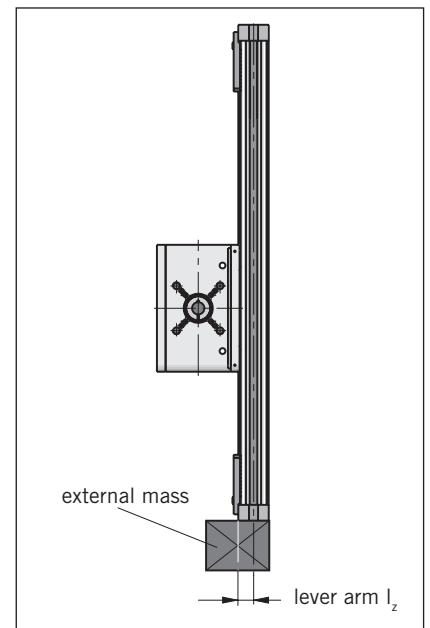


Vertical Linear Drive with Toothed Belt and integrated Recirculating Ball Bearing – Basic Unit Series OSP-E.. BV

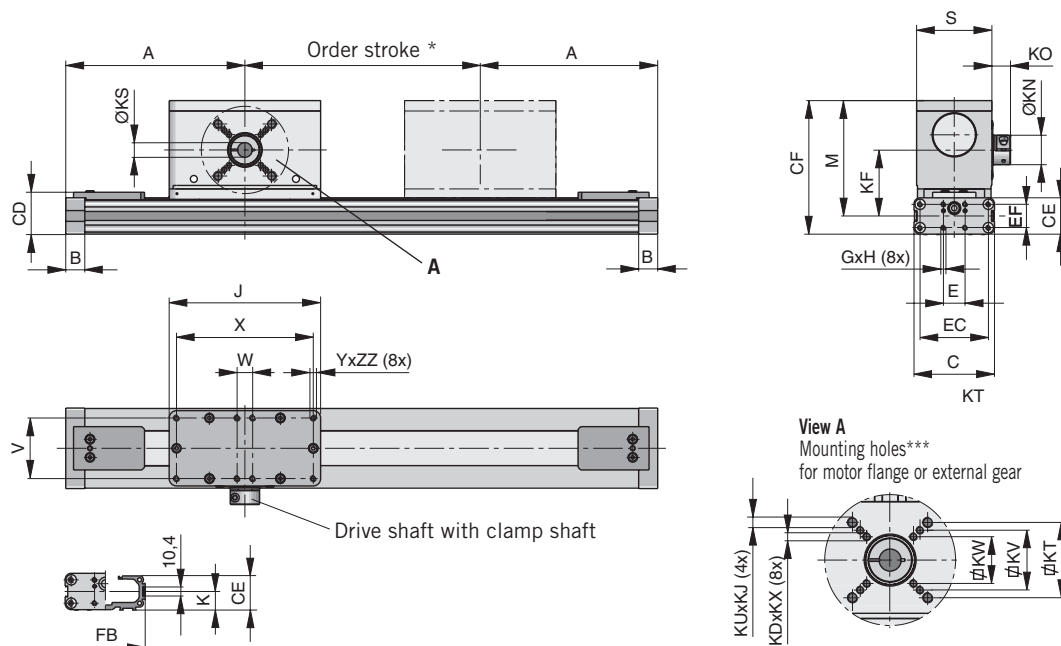

Plain shaft



Hollow shaft with keyway (Option)




Series	ØKB	KC	KL	KP	ØKR
OSP-E22BV	12 ^{H7}	13.8	4	28.5	12 _{h7}
OSP-E25BV	16 ^{H7}	18.3	5	31.5	16 _{h7}

* Note:

The mechanical end position must not be used as a mechanical end stop.
Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 100 mm.
Order stroke = required travel + 2 x safety distance.
The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems.
For further information please contact your local HOERBIGER-ORIGA representative.

Option – Tandem Series OSP-E.. BV

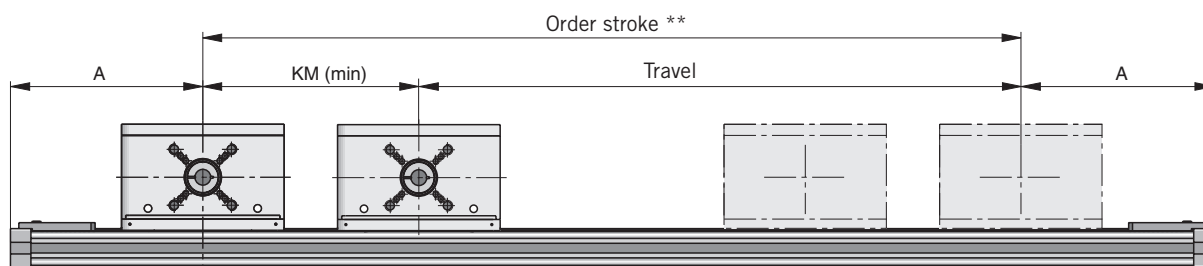

** Order stroke = required travel + KM min + 2 x safety distance.

Dimension Table [mm]																
Series	A	B	C	E	GxH	J	K	M	S	V	W	X	Y	CD	CE	CF
OSP-E20BV	148	22	93	25	M5x12	139	21.1	102.3	68	51	40	120	M6	40.4	34	123.3
OSP-E25BV	210	22	93	25	M5x12	175	21.5	133.5	87	70	18	158	M6	49	42	154.5

Series	EC	EF	FB	FH	KDxKX	KF	KM _{min}	KN	KO	KS	KT	KUxKJ	KV	KW	ZZ
OSP-E20BV	59	21	73	36.0	–	61.3	155	27	16	12 ^{H7}	46.5	M6x10	36	–	10
OSP-E25BV	79	27	92	39.5	M6x16	76	225	34	21.5	16 ^{H7}	58	M8x16	46	36	10

*** The mounting holes for the coupling housing are on the motor-mounting side. Therefore please ensure that the motor-mounting side is correctly stated when ordering the drive.

(For special drive shafts, other dimensions for KS and KB are available on request – see Order Instructions.)

Dimensions

The magnetic switches and magnets can be mounted on either sides

Dimension table [mm]

Series	MA	MB	MC	MD
OSP-E20BV	46	23.7	42.3	35
OSP-E25BV	56	26.0	51.0	35

Contactless Position Sensing with Magnetic Switches

The magnetic switch set, comprising two magnetic switches, a mounting rail and two magnets, is for contactless sensing of the end positions. The mounting rail and magnetic switches are mounted on the drive head and the magnets are mounted in the dovetail slot on the profile.

The magnetic switches are the RS-S type (connector version). For the connecting cable HOERBIGER-ORIGA recommends the use of cable suitable for cable chain.

Order instructions

Description	Ident-No.
Magnetic switch set, obtaining: - 2 magnetic switches - KL3087, TypRS-S - 1 mounting rail - 2 magnets	15886
Connecting cable, suitable for cable chain	
5 m	KL3186
10 m	KL3217
15 m	KL3216

Order Instructions

	OSP-E	25	-	7	0	0	0	2	-	00500	
--	-------	----	---	---	---	---	---	---	---	-------	--


Size	
20	Size 20
25	Size 25

Type of Drive	
7	Vertical linear drive with toothed belt and integrated recirculating ball bearing guide (...BV)

Drive Head	
0	Standard
1	Tandem (Option)

Stroke
Input (five digits) in mm

Drive Shaft		
Motor mounting position see M		
A	Plain shaft	
B	Plain shaft	
C	Double plain shaft (Option)	
D	Double plain shaft (Option)	
2	Clamp shaft	
3	Clamp shaft with plain shaft (Option)	
4	Clamp shaft	
5	Clamp shaft with plain shaft (Option)	
6	Hollow shaft with keyway (Option)	
7	Hollow shaft with keyway (Option)	
Special drive shaft versions on request		

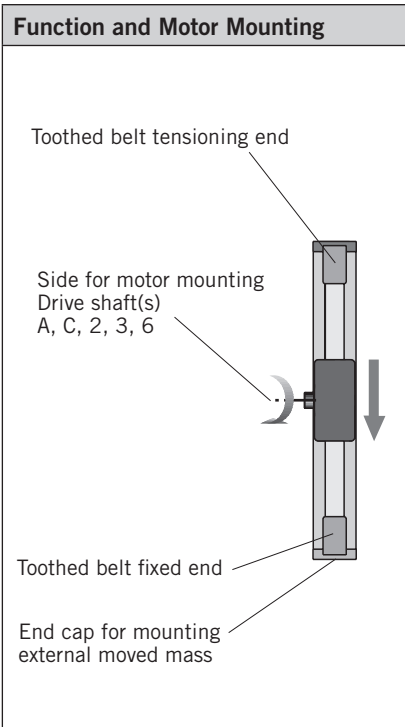

Accessories – please order separately

Description	For more information see Data Sheet No.
Motor mounting Type 25BHD for clamp shaft, code 2-5	1.44.006E-3
Motor mounting Type 50SB for plain shaft, code A-D	1.44.006E-3
Magnetic switches (for magnetic switch set see Data Sheet No. 1.20.016E-4)	1.44.030E
Multi-axis system for linear drives	1.38.001E, 1.38.002E, 1.38.004E
Drive systems and components for electric linear drives OSP-E	A4P019E

Linear Drive with Toothed Belt Series OSP-E..B



Contents

Description	DataSheet No.	Page
Overview	1.20.001E	35-38
Technical Data	1.20.002E-1 to 5	39-43
Dimensions	1.20.002E-6	44-45
Order Instructions	1.20.002E-7	46

ELECTRIC LINEAR DRIVE FOR POINT-TO-POINT APPLICATIONS

A completely new generation of linear drives which can be integrated into any machine layout neatly and simply.

Linear Drive with Toothed Belt and internal Plain Bearing Guide

Advantages



- Precise path and position control
- High speed operation
- Easy installation
- Low maintenance
- Ideal for precise point-to-point applications



Features

- Integrated drive and guidance system
- Tandem configuration with increased carrier distance for higher moment supports
- Long available strokes
- Complete motor and control packages
- Diverse range of accessories and mountings
- Bi-parting and special options available




Take the easy route and load all the dimensions into your system. The file is suitable for all current CAD systems – available on CD-Rom or at www.hoerbiger.com

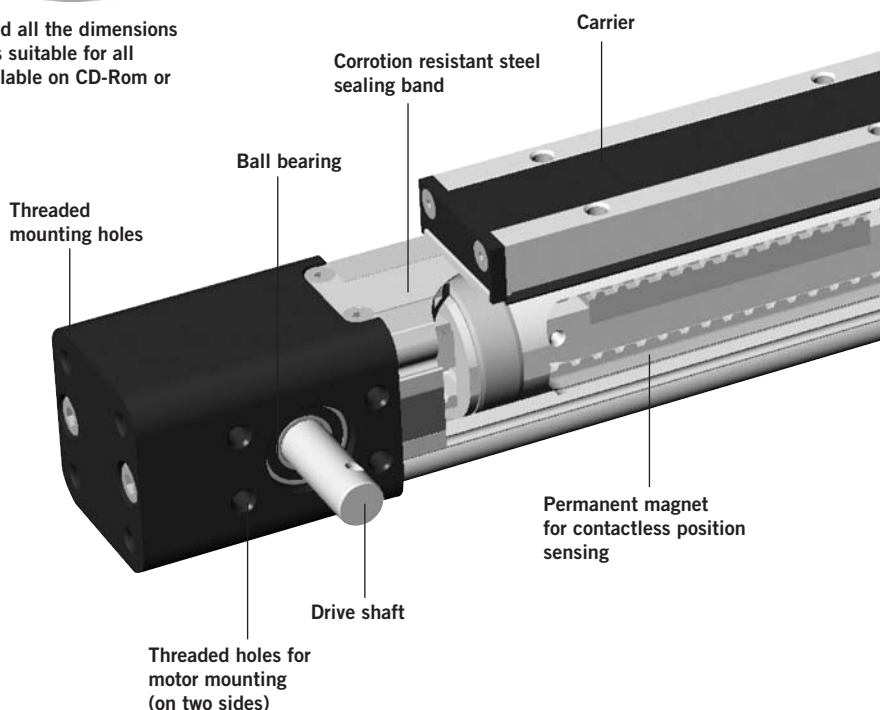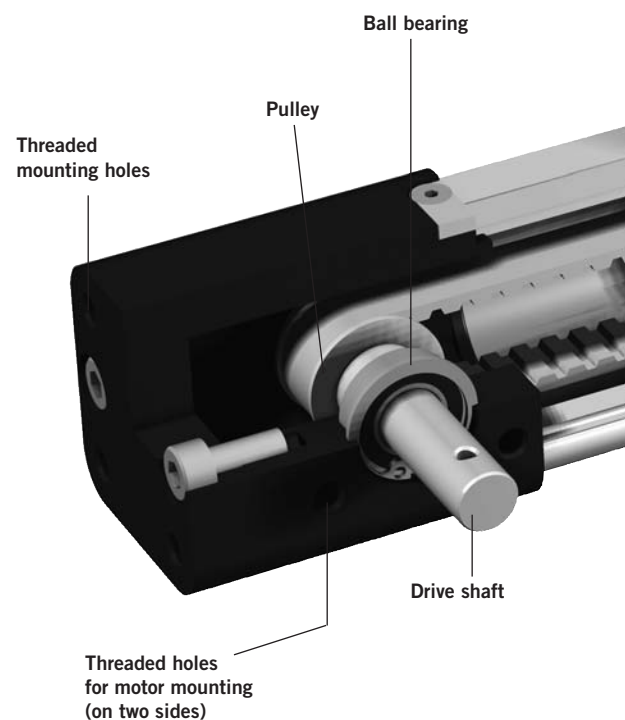


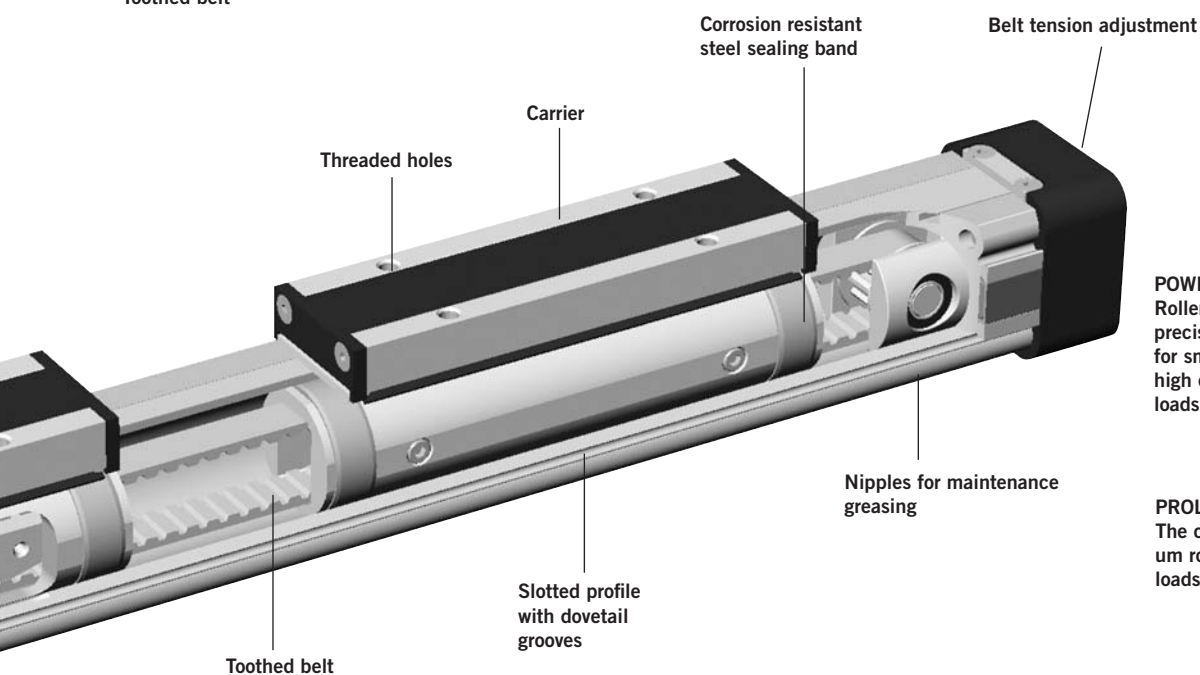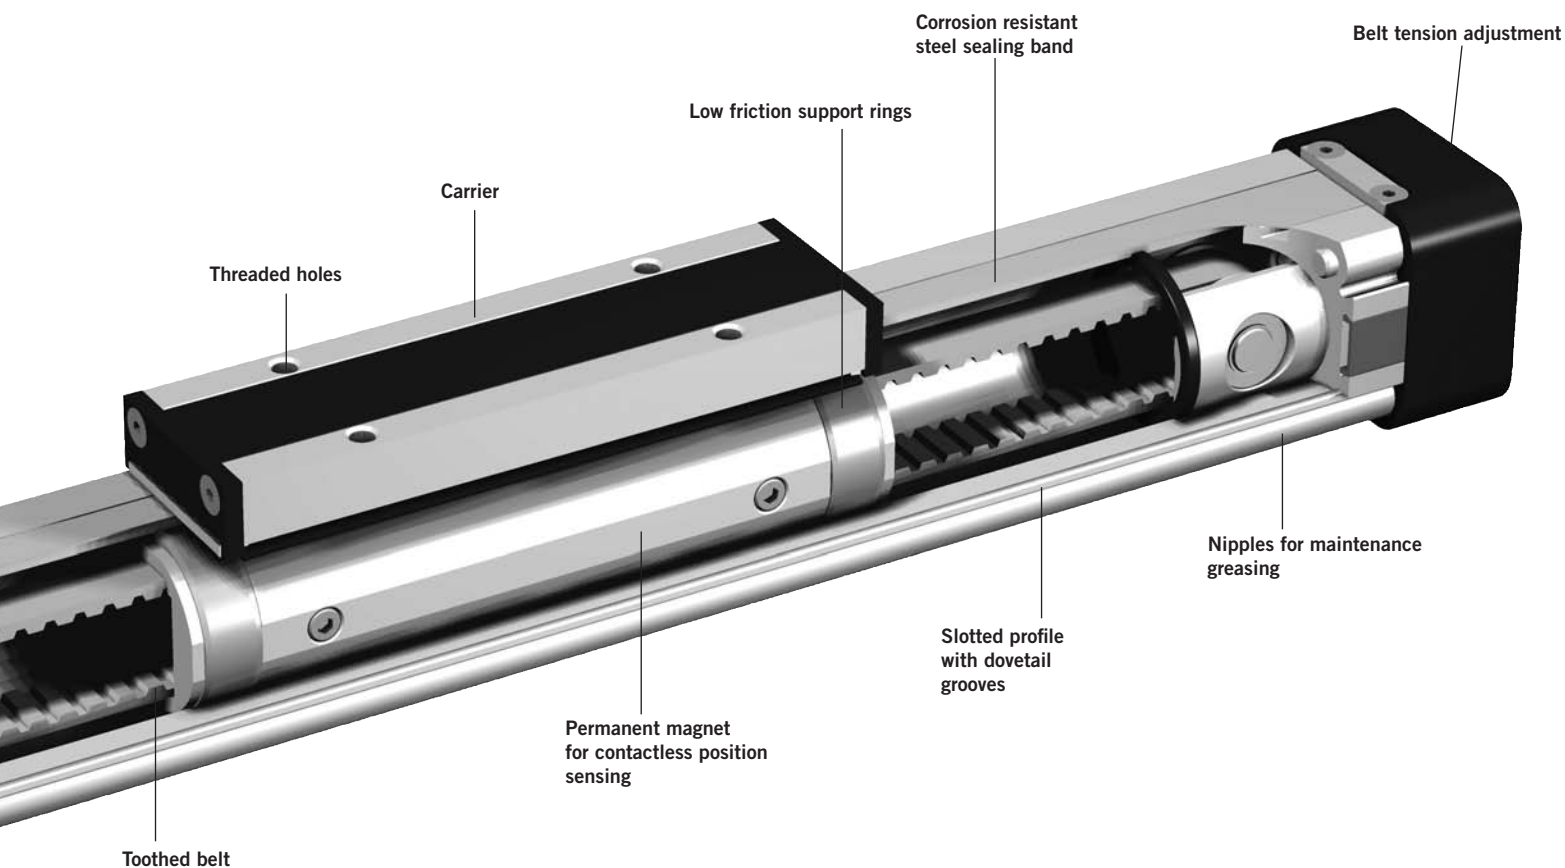


POWERSLIDE
Roller bearing
precision guidance
for smooth travel and
high dynamic or static
loads.




PROLINE
The compact aluminium
roller guide for high
loads and velocities.



Tandem configuration with increased carrier distance for higher moment supports.
Bi-parting version for precise synchronized movements

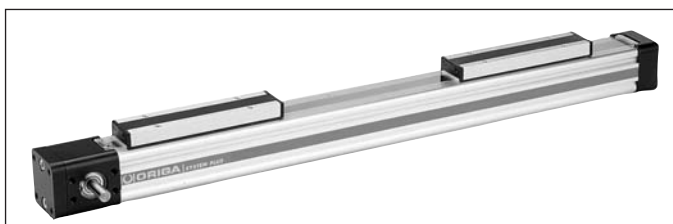

The dovetailed mounting rails of the new linear drive expand its function into that of a universal system carrier.
Modular system components are simply clamped on.




OPTIONS AND ACCESSORIES

SERIES OSP-E, LINEAR DRIVE WITH TOOTHED BELT AND INTERNAL PLAIN BEARING GUIDE

STANDARD VERSIONS OSP-E..B

Data sheets 1.20.002E-1, -2

Carrier with internal guidance and magnet packet for contactless position sensing. Dovetail profile for mounting of accessories and the actuator itself.

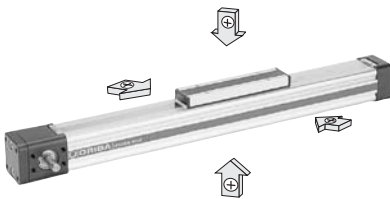

DRIVE SHAFT VERSIONS

- Plain shaft or
- double plain shaft (Option)
e.g. to drive two linear drives in parallel.



OPTIONS

TANDEM

Data sheet 1.20.002E-1, -2
For higher moment support.



BI-PARTING

Data sheet 1.20.002E-1, -2
For perfectly synchronised bi-parting movements.



ACCESSORIES

MOTOR MOUNTING

Data sheet 1.44.006E-4




END CAP MOUNTING

Data sheet 1.44.010E-3
For end-mounting of the drive.




MID-SECTION SUPPORT

Data sheet 1.44.010E-8
For supporting long drives or mounting the linear drive on the dovetail grooves.

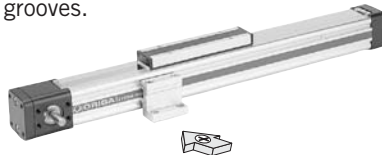

CLEVIS MOUNTING


Data sheet 1.44.010E-13,-14
Carrier with tolerance and parallelism compensation to drive external linear guides.

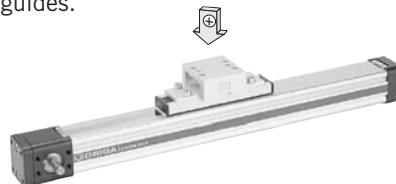

INVERSION MOUNTING


Data sheet 1.44.010E-15

The inversion mounting, mounted on the carrier, transfers the driving force to the opposite side, e.g. for dirty environments.

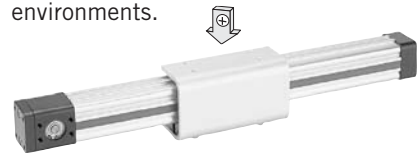

MAGNETIC SWITCHES SERIES RS AND ES

Data sheet 1.44.030E
For contactless position sensing of end stop and intermediate carrier positions.

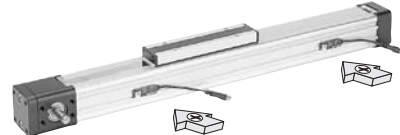

A3P106EOGFAG0X

The right to introduce technical modifications is reserved

Characteristics			
Characteristics	Symbol	Unit	Description
General Features			
Series			OSP-E..B
Name			Linear Drive with Toothed Belt
Mounting			See drawings
Temperature range	$\varnothing_{\min}$ $\varnothing_{\max}$	°C °C	-30 +80
Weight (mass)		kg	See table
Installation			See table
Material	Slotted profile		Extruded anodized aluminium
	Toothed belt		Steel-corded polyurethane
	Pulley		Aluminium
	Guide bearings		Low friction plastic
	Sealing band		Hardened corrosion resistant steel
	Screws, nuts		Zinc plated steel
Mountings			Zinc plated steel and aluminium
Encapsulation class	IP	54	

Weight (mass) and Inertia					
Series	at stroke 0 m	Weight (mass) [kg]		Inertia [$\times 10^{-6}$ kgm ²]	
		ad per meter stroke	moving mass	at stroke 0 m	ad per meter stroke
OSP-E25B	0.9	1.6	0.2	25.3	6.6
OSP-E32B	1.9	3.2	0.40	43.3	10
OSP-E50B	5.2	6.2	1.0	312.2	45
OSP-E25B*	1.2	1.6	0.5	48	6.6
OSP-E32B*	2.3	3.2	0.8	83	10
OSP-E50B*	6.3	6.2	2.1	585	45

* Version: Tandem and Bi-parting (Option)

Installation Instructions

Use the threaded holes in the end cap for mounting the linear drive. See if mid-section supports are needed using the maximum allowable unsupported length graph on data sheet 1.20.002E-3

At least one end cap must be secured to prevent axial sliding when mid-section support is used.

When the linear drive is moving an externally guided load, the clevis mounting must be used (see on data sheet 1.44.010E-13,-14).

The linear drives can be fitted with the standard carrier mounting facing in any direction.

To prevent contamination such as fluid ingress, the drive should be fitted with its sealing band facing downwards.

The inversion mounting can be fitted to transfer the driving force to the opposite side (see on data sheet 1.44.010E-15).

Maintenance

All moving parts are long-term lubricated for a normal operational environment. HOERBIGER-ORIGA recommends a check and lubrication of the linear drive, and if necessary a change of the toothed belt and wear parts, after an operation time of 12 months of operation or 3 000 km travel of distance. Additional greasing is easily done by using nipples in the slotted profile. Please refer to the operating instructions supplied with the drive.

First service start-up

The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the linear drive machine into service, the user must ensure the adherence to the EC Machine Directive 91/368/EEC.

Linear guides see 1.40.020E to 024E
Magnetic switches see 1.44.030E
Mountings and accessories see 1.44.006E, 1.44.010E

Linear Drive with Toothed Belt Series OSP-E..B Size 25, 32, 50




Standard Versions:

- Standard carrier with internal plain bearing guide
- Dovetail profile for mounting of accessories and the actuator itself
- Position of Drive Shafts



Options:

- Tandem-Version
- Bi-parting version for synchronized movements
- Drive shaft with double plain shaft



Sizing Performance Overview

Maximum Loadings

Sizing of Linear Drive

The following steps are recommended for selection:

1. Required acceleration is shown in graphs on data sheet 1.20.002-4E.
2. Required torque is shown on data sheet 1.20.002-5E.
3. Check that maximum values in the table 3 are not exceeded
4. Drive shaft by using table T2. (Pay attention to note under table) If value is lower than required, overview the moving profile or select if possible a bigger unit.
5. Before sizing and specifying the motor, the average torque must be calculated using the cycle time of the application.
6. Check that the maximum allowable unsupported length is not exceeded (see on data sheet 1.20.002-3E).

Performance Overview				
Characteristics	Unit	Description		
Size		OSP-E25B	OSP-E32B	OSP-E50B
Max. speed	[m/s]	2	3	5
Linear motion per revolution, drive shaft	[mm]	60	60	100
Max. rpm drive shaft	[min ⁻¹]	2 000	3 000	3 000
Max. effective action force	< 1 m/s: [N]	50	150	425
	1- 2 m/s: [N]	50	120	375
F _A at speed	> 2 m/s: [N]	–	100	300
No-load torque	[Nm]	0.4	0.5	0.6
Max. acceleration/deceleration	[m/s ²]	10	10	10
Repeatability	[mm/m]	±0.05	±0.05	±0.05
Max. stroke length OSP-E..B	[mm]	3000	5000	5000
Max. stroke length OSP-E..B*	[mm]	2 x 1500	2 x 2500	2 x 2500

* Bi-parting version

Maximum Permissible Torque on Drive Shaft Speed / Stroke											T2
OSP-E25B				OSP-E32B				OSP-E50B			
Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]
1	0.9	1	0.9	1	2.3	1	2.3	1	10.0	1	10.0
2	0.9	2	0.9	2	2.0	2	2.3	2	9.5	2	10.0
		3	0.9	3	1.8	3	2.3	3	9.0	3	9.0
						4	2.3	4	8.0	4	7.0
						5	1.8	5	7.5	5	6.0

Important:

The maximum permissible moment on the drive shaft is the lowest value of the speed- or stroke-dependent moment value.


Example above:

OSP-E32B stroke 2 m, required speed 3 m/s;

From table T2: speed 3 m/s gives 1.8 Nm and stroke 2 m gives 2.3 Nm.

Max. torque for this application is 1.8 Nm.

Forces, loads and moments

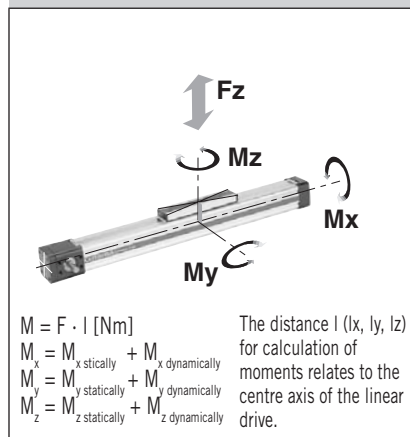

Combined Loads

If the linear drive is subjected to several forces, loads and moments at the same time, the maximum load is calculated with the equation shown here.



The maximum permissible loads must not be exceeded.

Maximum Permissible Loads					T3
Series	Max. applied load Fz [N]	Max. moments [Nm]			
		Mx	My	Mz	
OSP-E25B	160	2	12	8	
OSP-E32B	300	8	25	16	
OSP-E50B	850	16	80	32	
OSP-E..B Bi-partional	The maximum load F must be equally distributed among the two carriers.				



Equation for Combined Loads							
$\frac{F_z}{F_z \text{ (max)}}$	+	$\frac{M_x}{M_x \text{ (max)}}$	+	$\frac{M_y}{M_y \text{ (max)}}$	+	$\frac{M_z}{M_z \text{ (max)}}$	≤ 1

The total of the loads must not exceed >1 under any circumstances.


Series OSP-E..B

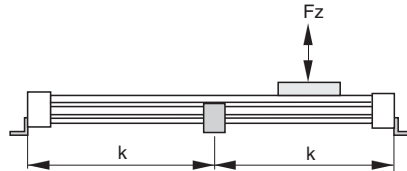

Series OSP-E..B
Bi-parting version

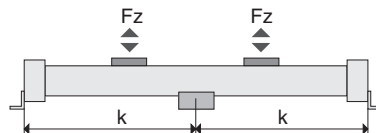

k = Maximum permissible distance between mountings/mid-section support for a given load F.

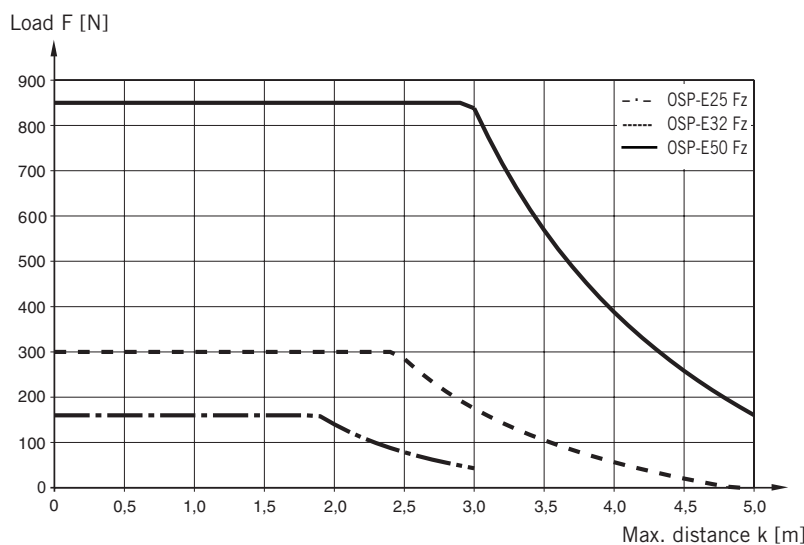

(Up to the curve in the above graph the deflection will be max. 0.2 % of distance k)

Maximum Permissible Unsupported Length

Stroke Length

The stroke lengths of the linear drives are available in multiples of 1 mm up to max.

OSP-E25B: 3 m / 2 x 1.5 m *

OSP-E32B: 5 m / 2 x 2.5 m *

OSP-E50B: 5 m / 2 x 2.5 m *

* Version: Bi-partional

Other stroke lengths are available on request.

The end of stroke must not be used as a mechanical stop.

Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft.

The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems.

For advise, please contact your local HOERBIGER-ORIGA technical support department.


When mechanical stops are required, external shock absorbers should be used (see separate data sheet). Align the centre line of the shock absorber as closely as possible with the object's centre of gravity (see separate data sheet).

Mounting on the Drive Shaft

Do not expose the drive shaft to uncontrolled axial or radial forces when mounting coupler or pulley, a steadying block should be used.

Pulley

Minimum allowable number of teeth Z (AT5) at maximum applied torque.

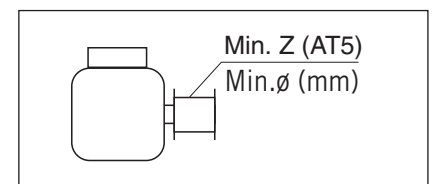

Series	Min. Z	Min. ø
OSP-E25B	24	38
OSP-E32B	24	38
OSP-E50B	36	57

Required Acceleration


Distance / Time Graph

Using the required travel distance and total time, the adjacent graphs show the required acceleration based on maximum speed.


The graphs assume that acceleration and deceleration are equal.

Please note that specifying non-essential high acceleration or short cycle time will result in an oversized motor.


Max. speed 1 m/s

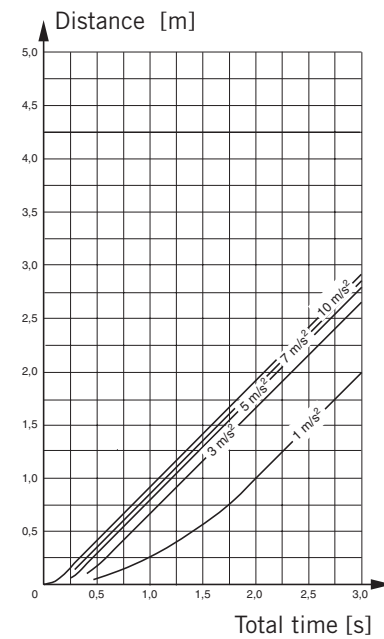


Max. speed 2 m/s

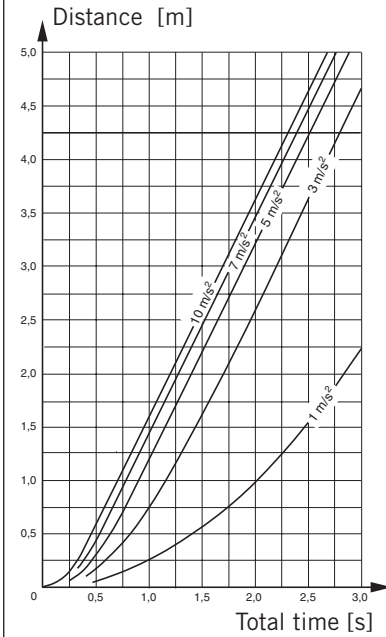


Max. speed 3 m/s

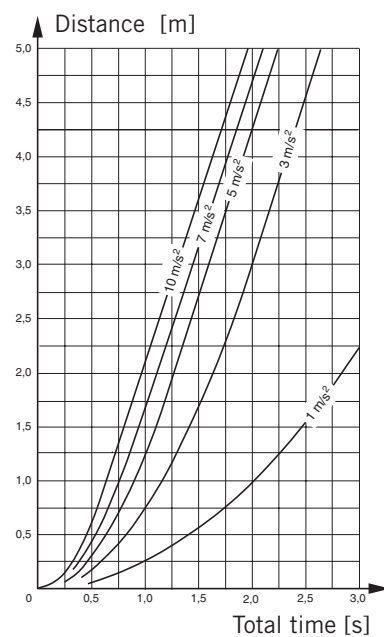


Max. speed 5 m/s

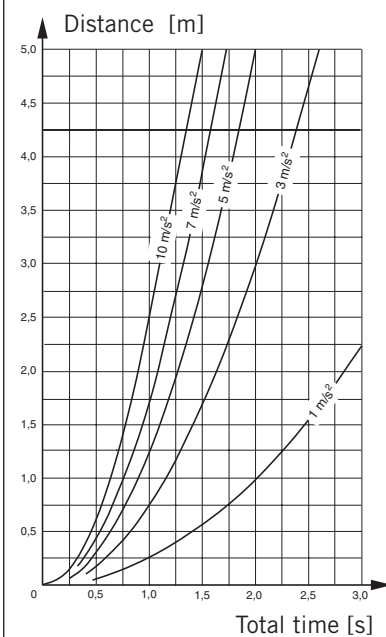

**Size OSP-E25B,
Horizontal Application**

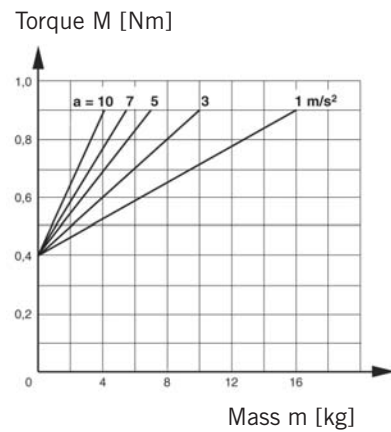


**Size OSP-E25B,
Vertical Application**

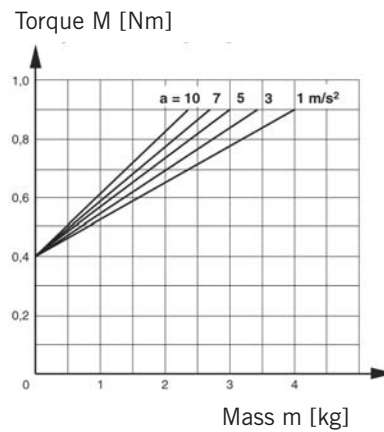


Required Torque / Mass

Using the known mass, the direction of the application and the required acceleration from the distance-time graphs, the linear drive can be sized and the required torque is shown in the adjacent graphs. Mass in graphs = Load + moving mass of the linear drive (according to the weight chart on data sheet 1.20.002E-1).

**Size OSP-E32B,
Horizontal Application**

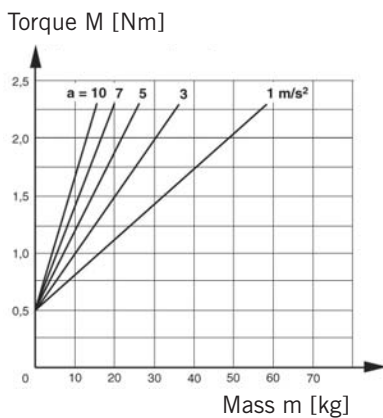


**Size OSP-E32B,
Vertical Application**

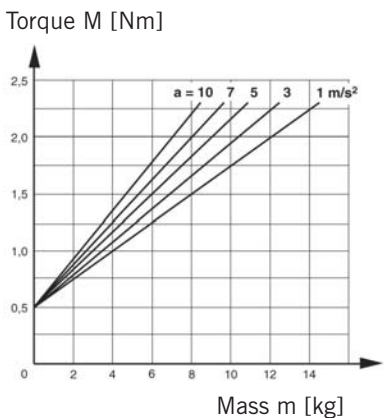


Please note:
When using an additional guide, please add the mass of the carriage to the total moving mass.


**Size OSP-E50B,
Horizontal Application**

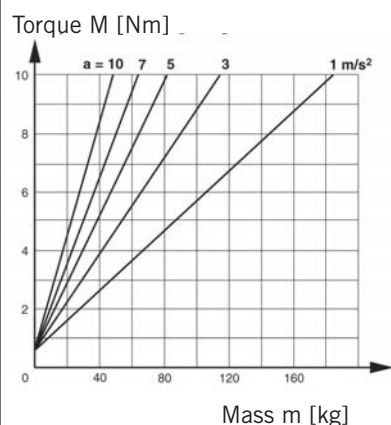

**Size OSP-E50B,
Vertical Application**

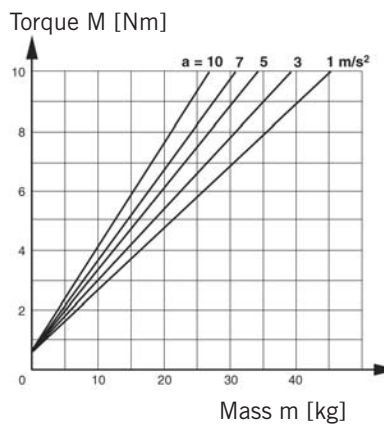

Linear Drive with Toothed Belt - Basic Unit Series OSP-E..B

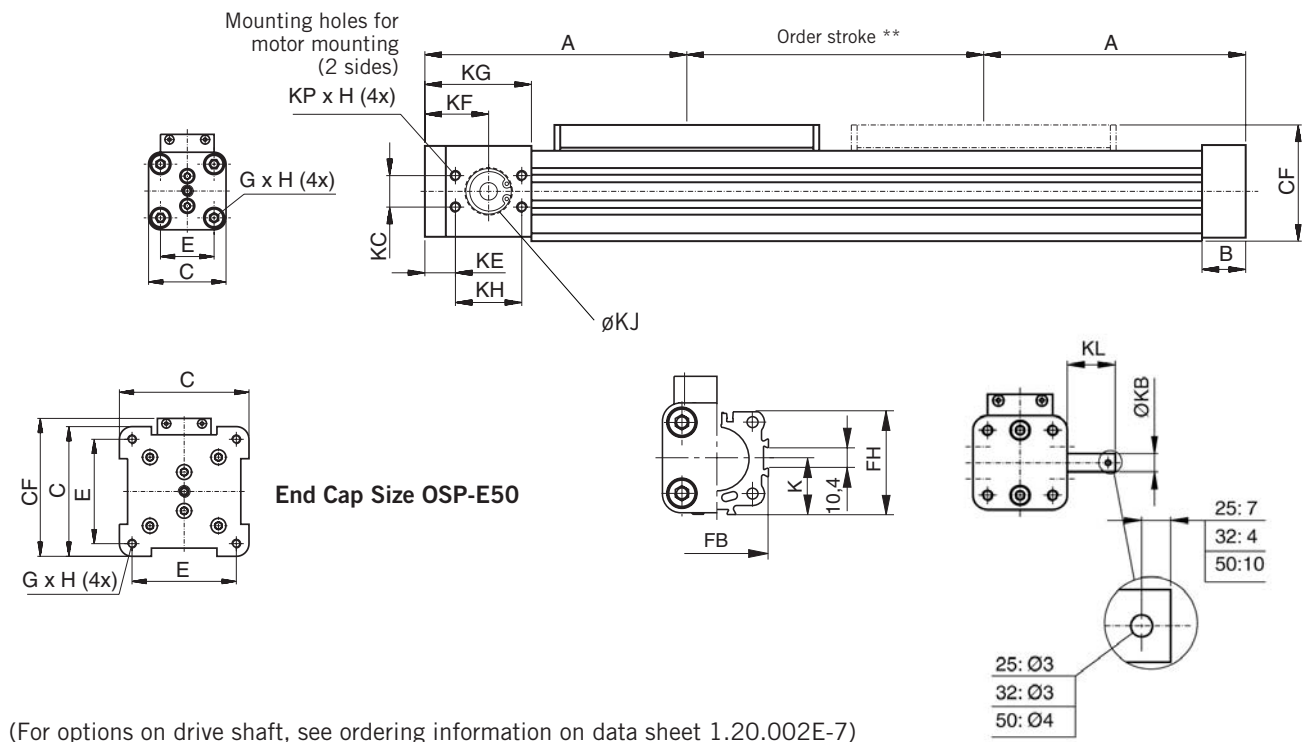


* Note:

The mechanical end position must not be used as a mechanical end stop. Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 100 mm.

Order stroke = required travel + 2 x safety distance.


The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems.
For further information please contact your local HOERBIGER-ORIGA representative.

Option – Tandem Series OSP-E..B

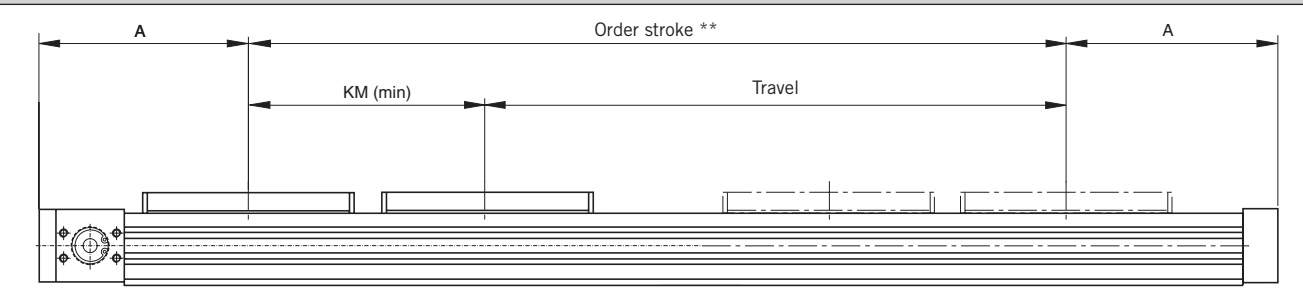


** Order stroke = required travel + KM min + 2 x safety distance

Option – Bi-parting Series OSP-E..B

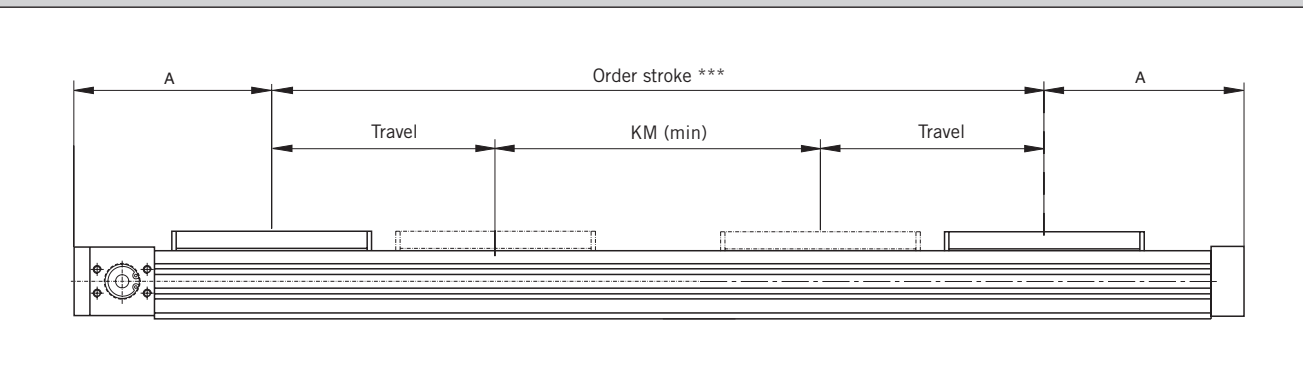

*** Order stroke = 2 x required travel + KM min + 2 x safety distance

**Standard Carrier
Series OSP-E..B**

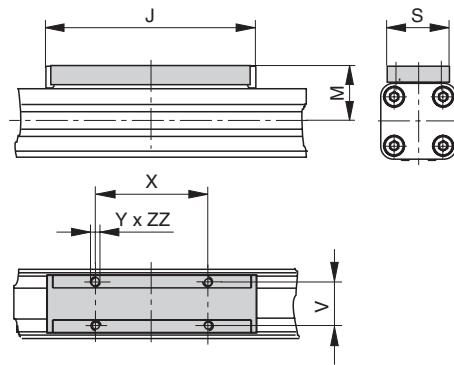

Dimension Table [mm]

Series	A	B	C	E	G x H	J	K	M	S	V	X	Y	CF
OSP-E25B	125	22	41	27	M5 x 10	117	21.5	31	33	25	65	M5	52.5
OSP-E32B	150	25	52	36	M6 x 12	152	28.5	38	36	27	90	M6	66.5
OSP-E50B	200	25	87	70	M6 x 12	200	43	49	36	27	110	M6	92.5

Series	FB	FH	KB	KC	KE	KF	KG	KH	KJ	KL	KM _{min}	KM _{empf.}	KP x H	ZZ
OSP-E25B	40	39.5	10 _{j6}	15	22	37	57	30	19 ^{H7}	24	130	190	M5 x 10	8
OSP-E32B	52	51.7	10 _{j6}	18	17.5	36.5	61	38	26 ^{H7}	26	170	230	M6 x 12	10
OSP-E50B	76	77	16 _{h8}	32	23.5	48.5	85	50	40 ^{H7}	34	220	320	M8 x 12	10

Order Instructions

	OSP-E	25	-	0	0	0	0	0	0	-	00500	
--	-------	----	---	---	---	---	---	---	---	---	-------	--

Size	
25	Size 25
32	Size 25
50	Size 25

Type of Drive	
0	Toothed Belt

Carrier	
0	Standard
1	Tandem (Option)
2	Bi-Parting (Option)

Stroke	
Input (five digits) in mm	

Position of Drive Shaft	
0	
1	
2	Double plain shaft (Option)

If combined with a linear guide, please also state position of linear guide

Position of Drive Shaft Standard = 0	Position of Drive Shaft Opposite to Standard = 1	Position of Drive Shaft Both Sides = 2
Position of Linear Guide Standard Position of guide opposite to drive shaft Opposite to Standard Position of guide same as drive shaft 	Position of Linear Guide Standard Position of guide opposite to drive shaft Opposite to Standard Position of guide same as drive shaft 	Position of Linear Guide Standard Position of guide opposite to drive shaft Opposite to Standard Position of guide same as drive shaft

Accessories - please order separately

Description	For more Information see Data Sheet No.
Coupling Housing	1.44.006E-4
End Cap Mountings	1.44.010E-3
Mid-Section Support	1.44.010E-8
Adaptor Profile	1.44.010E-9
T-Slot Profile	1.44.010E-10
Clevis Mounting	1.44.010E-13, -14
Inversion Mounting	1.44.010E-15
Magnetic Switches	1.44.030E
Drive systems and components for electric linear drives OSP-E	A4P019E

Linear Drive with Ball Screw Drive Series OSP-E..SB



Contents

Description	Data Sheet No.	Page
Overview	1.30.001E	47-50
Technical Data	1.30.002E-1 to 5	51-55
Dimensions	1.30.002E-6, -7	56-57
Order instructions	1.30.002E-8	58

ELECTRIC LINEAR DRIVE FOR HIGH ACCURACY APPLICATIONS

A completely new generation of linear drives which can be integrated into any machine layout neatly and simply.


Linear Drive with Ball Screw Drive and internal Plane Bearing Guide

Advantages

- Accurate path and position control
- High force output
- Easy installation
- Excellent slow speed characteristics
- Ideal for precise traverse operations (e.g. machine feeds) and lifting applications

Features

- Integrated drive and guidance system
- Complete motor and control packages
- Diverse range of accessories and mountings
- Optimal screw pitches (5, 10, 25 mm)

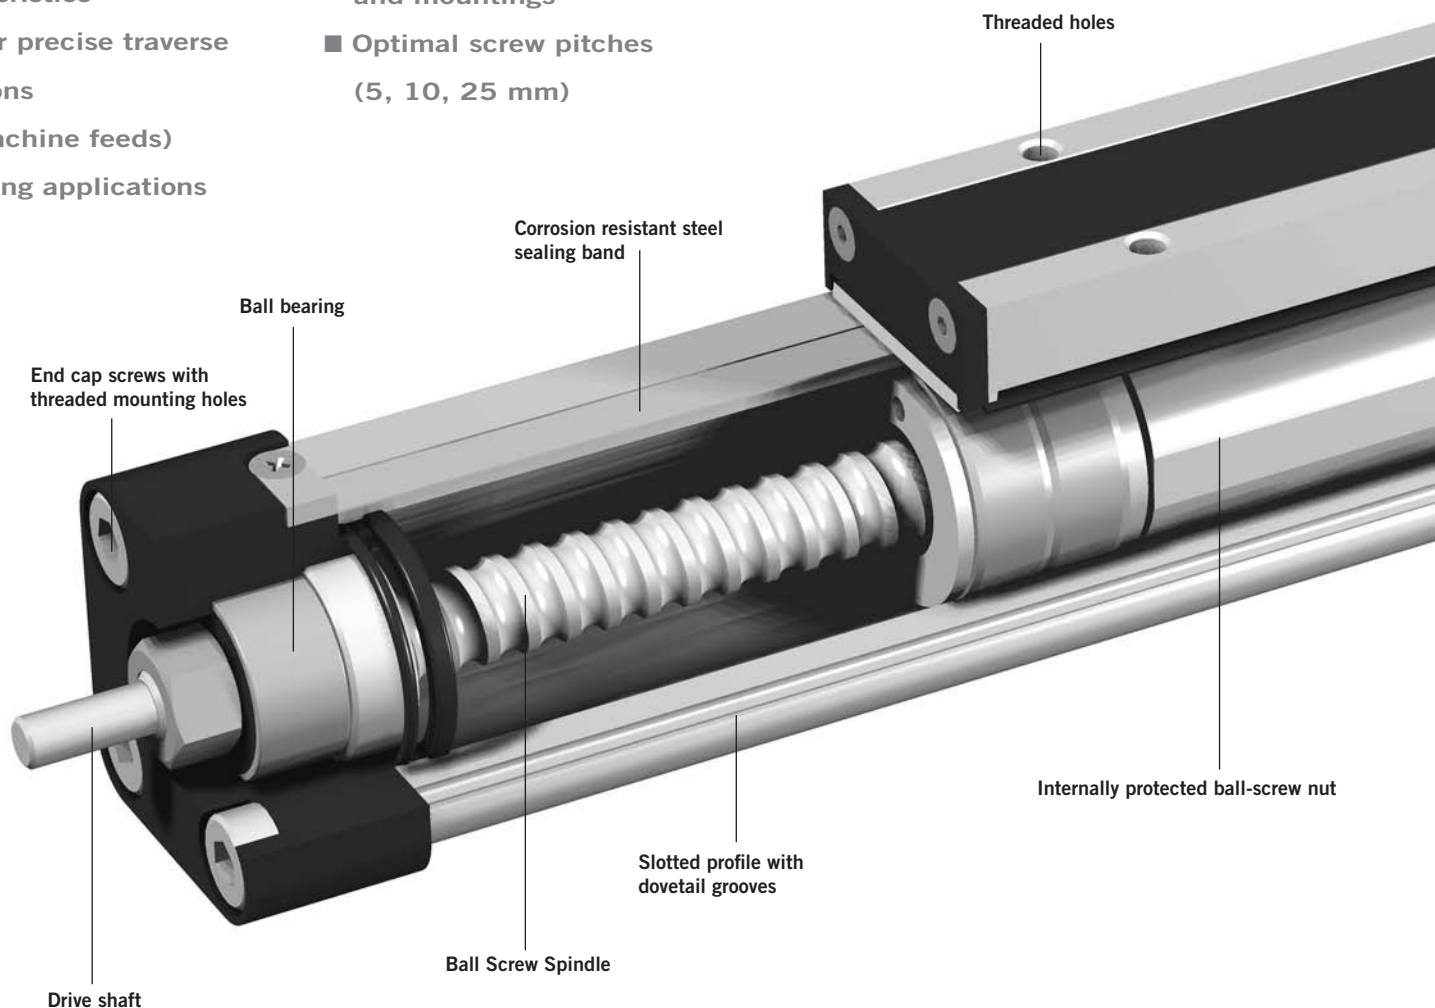

Clean Room-Version
certified to DIN EN ISO 14644-1



SLIDELINE
Combination with
linear guides
provides for heavier
loads.




POWERSLIDE
Roller bearing
precision guidance
for smooth travel and
high dynamic or static
loads.



PROLINE
The compact
aluminium roller
guide for high loads
and velocities.



Heavy Duty guide HD
linear guides for heavy
duty applications




SFI-plus
displacement
measuring system



Low friction support rings

Carrier

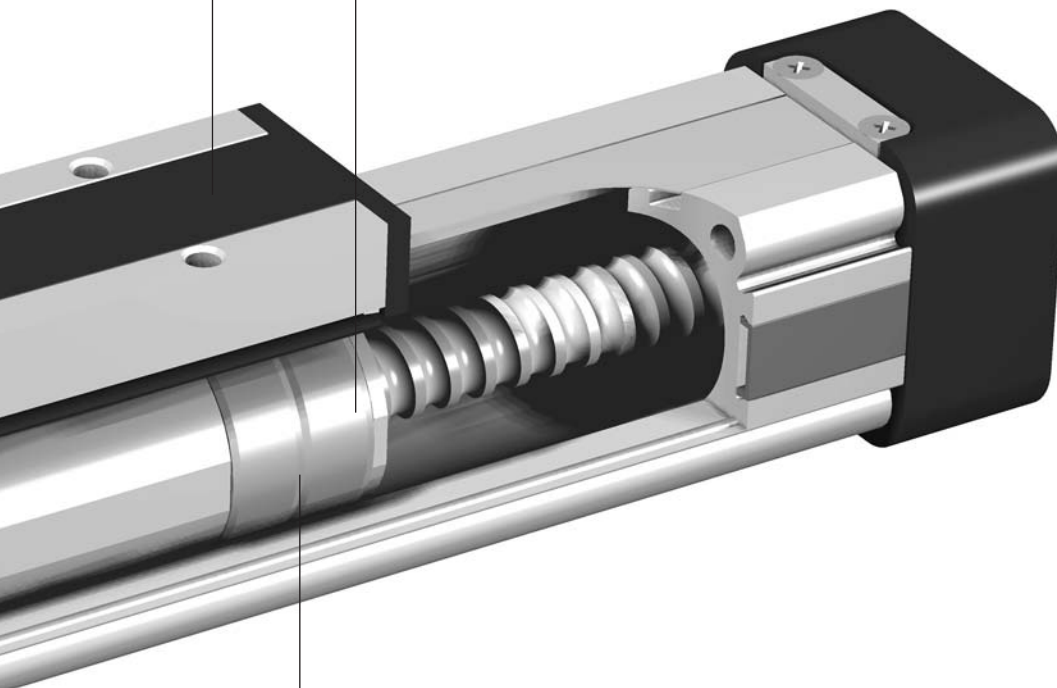


Permanent magnet for
contactless sensing



Take the easy route and load all the dimensions into your system. The file is suitable for all current CAD systems – available on CD-Rom or at www.hoerbiger.com

The dovetailed mounting rails of the new linear drive expand its function into that of a universal system carrier. Modular system components are simply clamped on.




SERIES OSP-E, LINEAR DRIVE WITH BALL SCREW DRIVE AND INTERNAL PLAIN BEARING GUIDE

STANDARD VERSION OSP-E..SB

Data Sheet 1.30.002E

Standard carrier with internal guidance and integrated magnet set for contactless position sensing. Dovetail profile for mounting of accessories and the actuator itself.

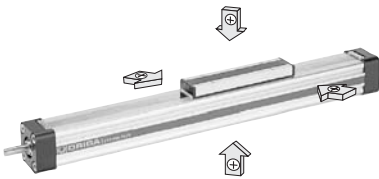

BALL SCREW PITCH

The ball screws spindles are available in various pitches:

OSP-E25SB: 5 mm

OSP-E32SB: 5, 10 mm

OSP-E50SB: 5, 10, 25 mm

OPTIONS

TANDEM

Data Sheet 1.30.002E-6

For higher moment support.



CLEAN ROOM

certified to DIN EN ISO 14644-1



DISPLACEMENT MEASURING SYSTEM SFI-plus

Data Sheet 1.44.035E

Incremental measuring system with practically relevant resolution.



ACCESSORIES

MOTOR MOUNTINGS

Data Sheet 1.44.006E-5



END CAP MOUNTING

Data Sheet 1.44.010-3


For end-mounting of the drive.



MID-SECTION SUPPORT

Data Sheet 1.44.010E-8


For supporting long drives or mounting the linear drive on the dovetail grooves.

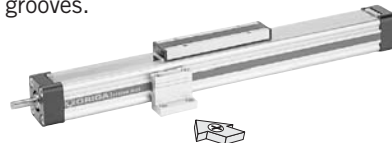

CLEVIS MOUNTING

Data sheet 1.44.010E-13,-14


Carrier with tolerance and parallelism compensation to drive external linear guides.

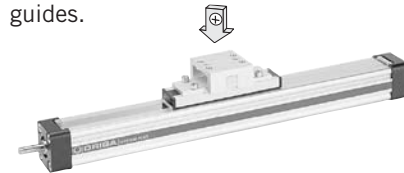

INVERSION MOUNTING

Data Sheet 1.44.010E-15


The inversion mounting, mounted on the carrier, transfers the driving force to the opposite side, e.g. for dirty environments.

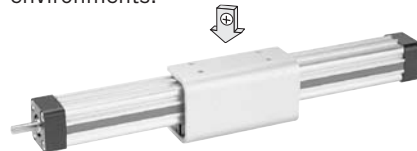

MAGNETIC SWITCHES SERIES RS AND ES

Data Sheet 1.44.030E

For contactless position sensing of end stop and intermediate carrier positions.

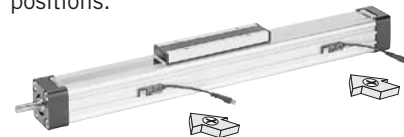

A3P107E 00GAG0X

The right to introduce technical modifications is reserved

Characteristics			
Characteristics	Symbol	Unit	Description
General Features			
Series			OSP-E..SB
Name			Linear Drive with Ball Screw Drive
Mounting			See drawings
Temperature Range	$\vartheta_{\min}$ $\vartheta_{\max}$	°C °C	-20 +80
Weight (mass)		kg	See table
Installation			In any position
Material	Slotted profile		Extruded anodized aluminium
	Ball screw		Hardened steel
	Ball screw nut		Hardened steel
	Guide bearings		Low friction plastic
	Sealing band		Hardened, corrosion resistant steel
	Screws, nuts		zinc plated steel
	Mountings		zinc plated steel and aluminium
Encapsulation class		IP	54

Weight (mass) and Inertia					
Series	At stroke 0 m	Weight (mass) [kg]		Inertia [$\times 10^{-6}$ kgm ²]	
		Add per metre stroke	Moving mass	At stroke 0 m	Add per metre
OSP-E25SB	0.8	2.3	0.2	2.2	11.3
OSP-E32SB	2.0	4.4	0.4	8.4	32
OSP-E50SB	5.2	9.4	1.2	84	225

Installation Instructions

Use the threaded holes in the free end cap and a mid-section support close to the motor end for mounting the linear drive.

See if mid-section supports are needed using the maximum permissible unsupported length graph on data sheet 1.30.002E-3. At least one end cap must be secured to prevent axial sliding when mid-section support is used.

When the linear drive is moving an externally guided load, the clevis mounting must be used (see data sheet 1.44.010E-13, -14).

The linear drives can be fitted with the standard carrier mounting facing in any direction.

To prevent contamination such as fluid ingress, the drive should be fitted with its sealing band facing downwards.

The inversion mounting can be fitted to transfer the driving force to the opposite side (see data sheet 1.44.010E-15).

Maintenance

All moving parts are long-term lubricated for a normal operational environment. HOERBIGER-ORIGA recommends a check and lubrication of the linear drive, and if necessary a change of wear parts, after an operation time of 12 months or 3000 km travel of distance. Please refer to the operating instructions supplied with the drive.

First service start-up

The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the linear drive machine into service, the user must ensure the adherence to the EC Machine Directive 91/368/EEC.

Linear Drive with Ball Screw Drive

Series OSP-E..SB
Size 25, 32, 50



Standard Versions:

- Standard carrier with internal plain bearing guide
- Dovetail profile for mounting of accessories and the actuator itself
- Pitches of Ball Screw Spindle
Type OSP-E25 : 5 mm
Type OSP-E32: 5, 10 mm
Type OSP-E50: 5, 10, 25 mm

Options:

- Tandem-Version
- Clean room-version, according to DIN EN ISO 14644-1
- Displacement Measuring System SFI-plus (Data Sheet 1.40.035E)



For **linear guides** see 1.40.020E to 024E
For **magnetic switches** see 1.44.030E
For **mountings** and **accessories** see 1.44.006E, 1.44.010E



Sizing Performance Overview

Maximum Loadings


Sizing of Linear Drive

The following steps are recommended for selection :

1. Recommended maximum acceleration is shown in graphs on data sheet 1.30.002E-4
2. Required torque is shown in graphs on data sheet 1.30.002E-5
3. Check that maximum values in the adjacent charts are not exceeded.
4. When sizing and specifying the motor, the RMS-average torque must be calculated using the cycle time of the application.
5. Check that the maximum allowable unsupported length is not exceeded (see on data sheet 1.30.002E-3)

Performance Overview							
Characteristics	Unit	Description					
Series		OSP-E25SB	OSP-E32SB		OSP-E50SB		
Pitch	[mm]	5	5	10	5	10	25
Max. speed	[m/s]	0.25	0.25	0.5	0.25	0.5	1.25
Linear motion per revolution drive shaft	[mm]	5	5	10	5	10	25
Max. rpm, drive shaft	[min ⁻¹]	3 000	3 000		3 000		
Max. effective action force F _A Corresponding torque on drive shaft	[N]	250	600		1 500		
	[Nm]	0.35	0.75	1.3	1.7	3.1	7.3
No-load torque	[Nm]	0.2	0.2	0.3	0.3	0.4	0.5
Max. allowable torque on drive shaft	[Nm]	0.6	1.5	2.8	4.2	7.5	20
Repeatability	[mm/m]	±0.05	±0.05		±0.05		
Max. Standard stroke length	[mm]	1100	2000		3200		

Forces, loads and moments

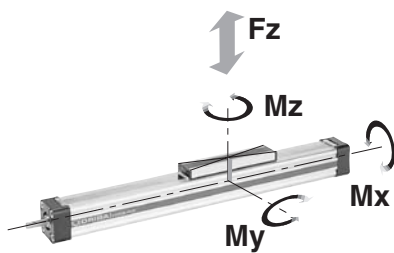

$$M = F \cdot l \text{ [Nm]}$$

$$M_x = M_{x \text{ statically}} + M_{x \text{ dynamically}}$$

$$M_y = M_{y \text{ statically}} + M_{y \text{ dynamically}}$$

$$M_z = M_{z \text{ statically}} + M_{z \text{ dynamically}}$$

Combined Loads

If the linear drive is subjected to several forces, loads and moments at the same time, the maximum load is calculated with the equation shown here.

The maximum permissible loads must not be exceeded.

Maximum Permissible Loads

T3


Series	Max. applied load [N] Fz	Max. moments [Nm]		
		Mx	My	Mz
OSP-E25SB	500	2	12	8
OSP-E32SB	1 200	8	25	16
OSP-E50SB	3 000	16	80	32

Equation for combined loads


$$\frac{F_z}{F_z \text{ (max)}} + \frac{M_x}{M_x \text{ (max)}} + \frac{M_y}{M_y \text{ (max)}} + \frac{M_z}{M_z \text{ (max)}} \leq 1$$

The total of loads must not exceed >1 under any circumstances.

Maximum Permissible Unsupported Length – Placing of Mid-Section Support

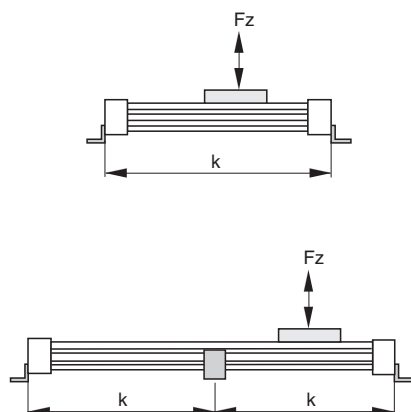

k = Maximum permissible distance between mountings/mid-section support for a given load F .

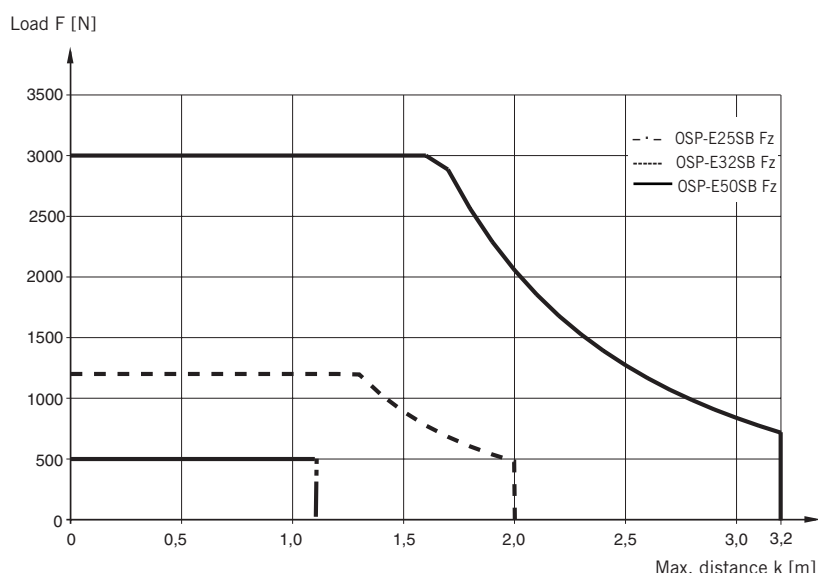

(Up to the curve in the above graph the deflection will be max. 0.2 % of distance k .)

Maximum Permissible Unsupported Length

Stroke Length

The stroke lengths of the linear drives are available in multiples of 1 mm up to above maximum stroke lengths.

OSP-E25SB: max. 1100 mm

OSP-E32SB: max. 2000 mm

OSP-E50SB: max. 3200 mm

Other stroke lengths are available on request.

The end of stroke must not be used as a mechanical stop.

Allow an additional safety clearance of minimum 25 mm at both ends.

The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems.

For advise, please contact your local HOERBIGER-ORIGA technical support department.

When mechanical stops are required, external shock absorbers should be used (see separate catalogue).


Align the centreline of the shock absorber as closely as possible with the object's centre of gravity.

Mounting on the Drive Shaft

Do not expose the drive shaft to uncontrolled axial or radial forces when mounting coupling or belt wheel, a steadying block should be used.

Belt wheels


Minimum allowable number of teeth (AT5) and diameter of belt wheel at maximum applied torque.

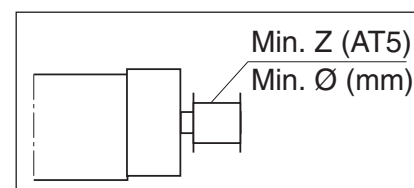

Size	Min. Z	Min. Ø
OSP-E25SB	24	38
OSP-E32SB	24	38
OSP-E50SB	36	57


Maximum rpm / Stroke

At longer strokes the speed has to be reduced according to the adjacent graphs.

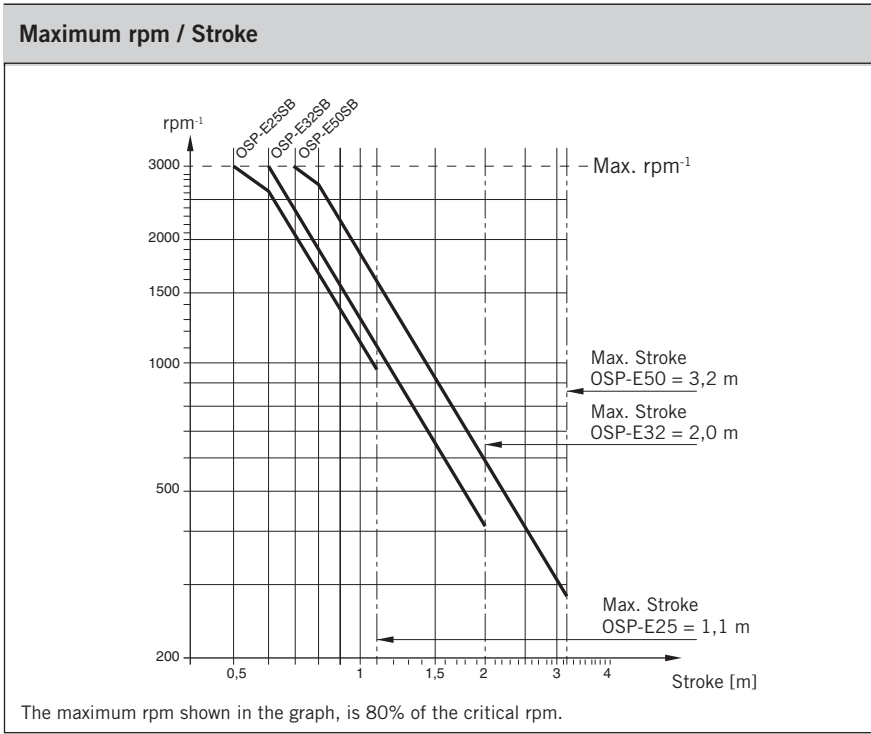


Performance / Action force

The performance to be expected depends on the maximum required actions force of the application. An increase of the action force will lead to a reduced performance.

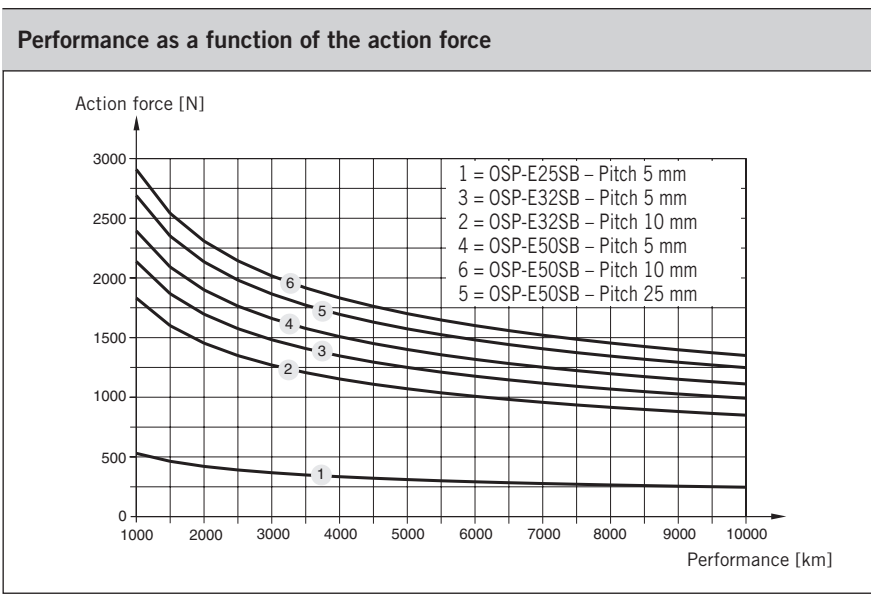


Distance / Time Graph


The adjacent graphs show travel distance and total time at maximum speed and recommended maximum acceleration. The graph assumes that acceleration and deceleration are equal.

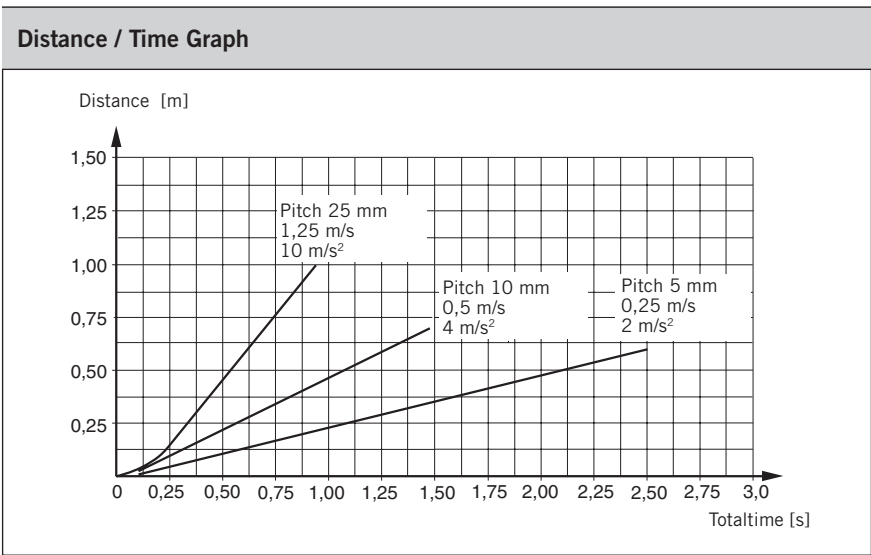

**Size OSP-E25SB, Pitch 5mm
Acceleration 2 m/s²**

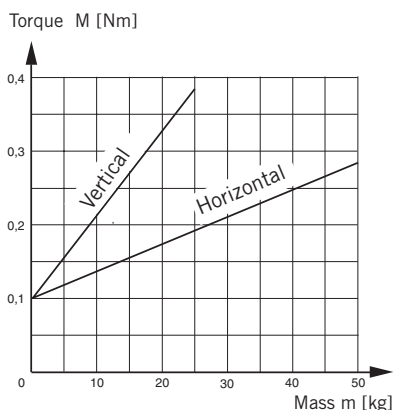

**Size OSP-E32SB, Pitch 5 mm
Acceleration 2 m/s²**

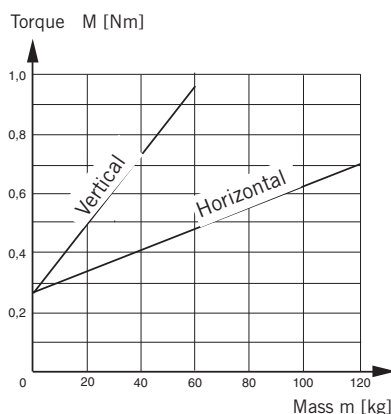

Required Torque / Mass


Using the known mass, the direction of the application and the recommended acceleration, the linear drive can be sized and the required torque is shown in the adjacent graphs.

Mass in graphs = Load + moving mass of the linear drive according to the weight chart (see table on data sheet 1.30.002E-1).


Please mind:

If an additional guide is used, mind the weight of the guide carriage.


**Size OSP-E32SB, Pitch 10 mm
Acceleration 4 m/s²**

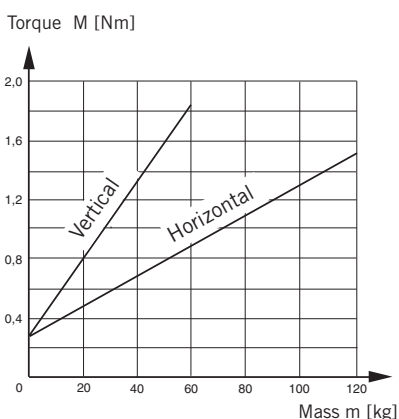


**Size OSP-E50SB, Pitch 5 mm
Acceleration 2 m/s²**

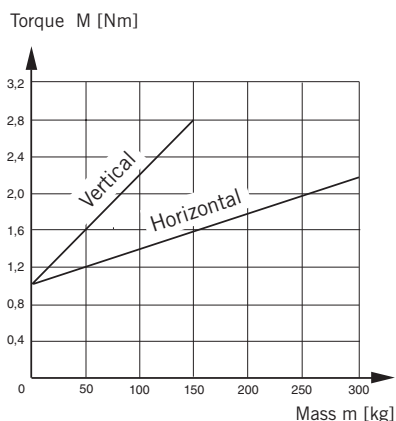


**Size OSP-E50SB, Pitch 10 mm
Acceleration 4 m/s²**

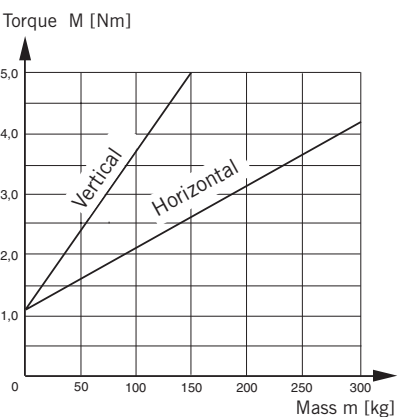


**Size OSP-E50SB, Pitch 25 mm
Acceleration 10 m/s²**

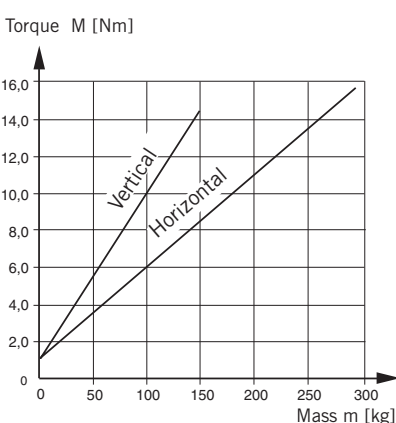

Linear Drive with Ball Screw Drive – Basic Unit
Series OSP-E..SB

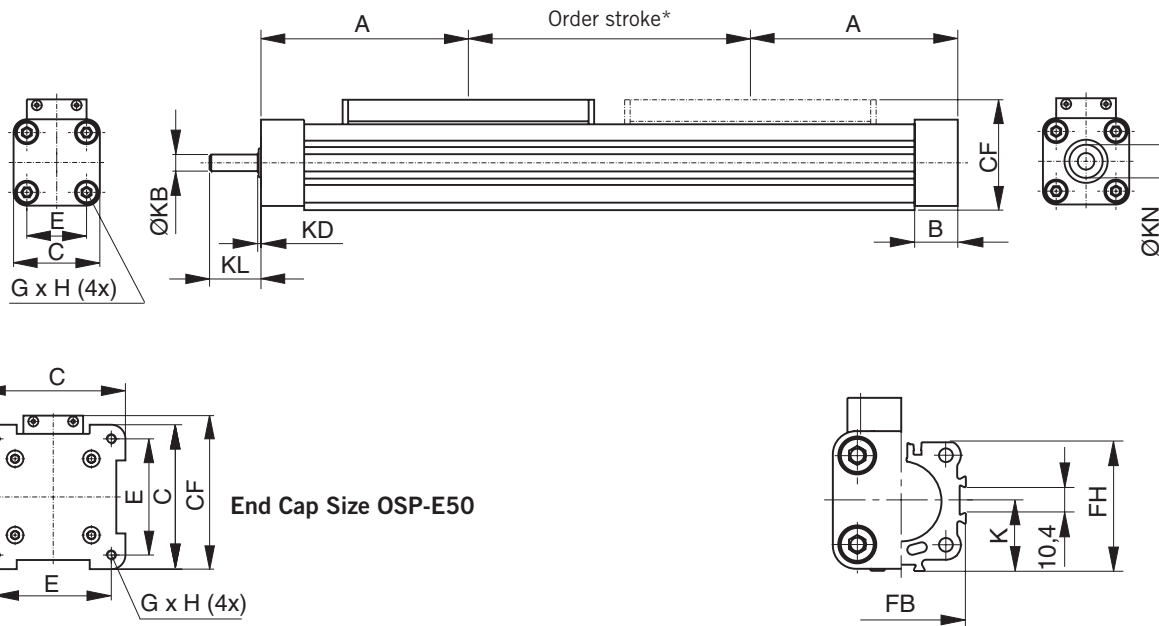

Plain shaft with keyway (Option)

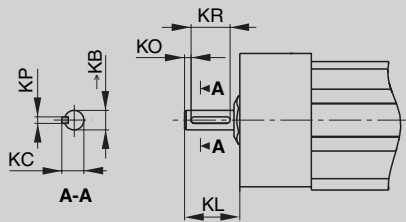

Dimension Table [mm]

Series	ØKB _{h7}	KC	KL Opt.3	Opt.4	KO	KP ^{P9}	KR
OSP-E25SB	6	6.8	17	24	2	2	12
OSP-E32SB	10	11.2	31	41	5	3	16
OSP-E50SB	15	17	43	58	6	5	28

Option 3: Keyway
Option 4: Keyway long version


*** Note:**

The mechanical end position must not be used as a mechanical end stop. Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 25 mm.

Order stroke = required travel + 2 x safety distance.


The use of an AC motor with frequency converter NORMALLY requires a larger safety clearance than that required for servo systems.
 For further information, please contact your local HOERBIGER-ORIGA representative.

Option – Tandem
Series OSP-E..SB

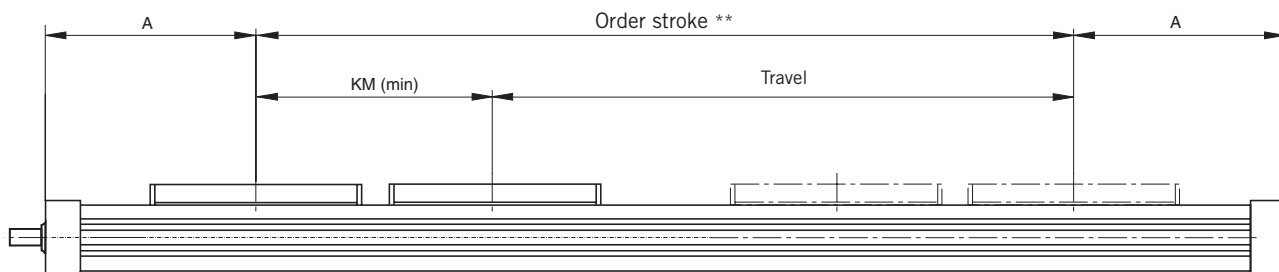

** Order stroke = required travel + KM min + 2 x safety distance

**Standard Carrier
Series OSP-E..SB**

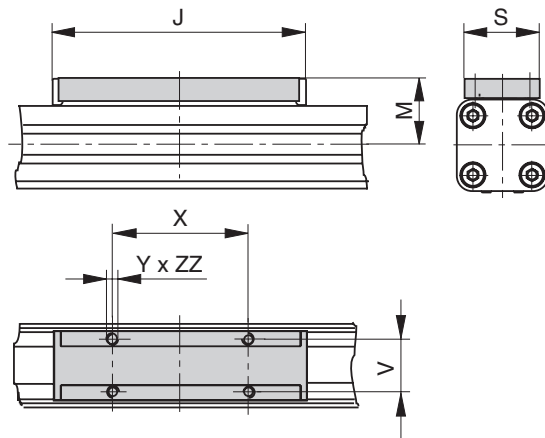

Dimension table [mm]

Series	A	B	C	E	G x H	J	K	M	S	V	X	Y	CF	FB	FH	KB	KD	KL	KM _{min}	KN	ZZ
OSP-E25SB	100	22	41	27	M5 x 10	117	21.5	31	33	25	65	M5	52.5	40	39.5	6 _{h7}	2	17	120	13	8
OSP-E32SB	125	25.5	52	36	M6 x 12	152	28.5	38	36	27	90	M6	66.5	52	51.7	10 _{h7}	2	31	165	20	10
OSP-E50SB	175	33	87	70	M6 x 12	200	43	49	36	27	110	M6	92.5	76	77	15 _{h7}	3	43	235	28	10

Order Instruction

	OSP-E	25	-	1	0	3	0	0	-	00500	
--	-------	----	---	---	---	---	---	---	---	-------	--

Size	
25	Size 25
32	Size 25
50	Size 25

Type of Drive	
1	Ball Screw

Carrier Mounting	
0	Standard
1	Tandem (option)
3	Clean room (option)
4	Displacement Measuring system SFI-plus (Option)

Pitch	
3	5 mm (Size 25, 32, 50)
4	10 mm (Size 32, 50)
5	25 mm (Size 50)

Stroke	
Input (five digits) in mm	

Drive shaft	
0	Plain
3	Keyway (Option)
4	Keyway long version (Option)

Accessories - please order separately

Description	For more informations see Data Sheet No.
Coupling Housing	1.44.006E-5
End Cap Mountings	1.44.010E-3
Mid-Section Support	1.44.010E-8
Adapter Profile	1.44.010E-9
T-Nut Profile	1.44.010E-10
Clevis Mounting	1.44.010E-13, -14
Inversion Mounting	1.44.010E-15
Magnetic Switches	1.44.030E
Drive systems and components for electric linear drives OSP-E	A4P019E

Linear Drive with Trapezoidal Screw Drive Series OSP-E..ST



Contents

Description	Data Sheet No.	Page
Overview	1.35.001E	59-62
Technical Data	1.35.002E-1 to 4	63-66
Dimensions	1.35.002E-5	67
Order Instructions	1.35.002E-6	68

ELECTRIC LINEAR DRIVE FOR INTERMITTENT APPLICATIONS

A completely new generation of linear drives which can be integrated into any machine layout neatly and simply.


Linear Drive with Trapezoidal Screw Drive and internal Plain Bearing Guide

Advantages


- Accurate path and position control
- High force output
- Self-locking
- Excellent slow speed characteristics
- Easy installation
- Low maintenance
- Ideal for level regulation, lifting and other applications with intermittent operations

Features


- Integrated drive and guidance system
- Complete motor and control packages
- Diverse range of accessories and mountings
- Special options available

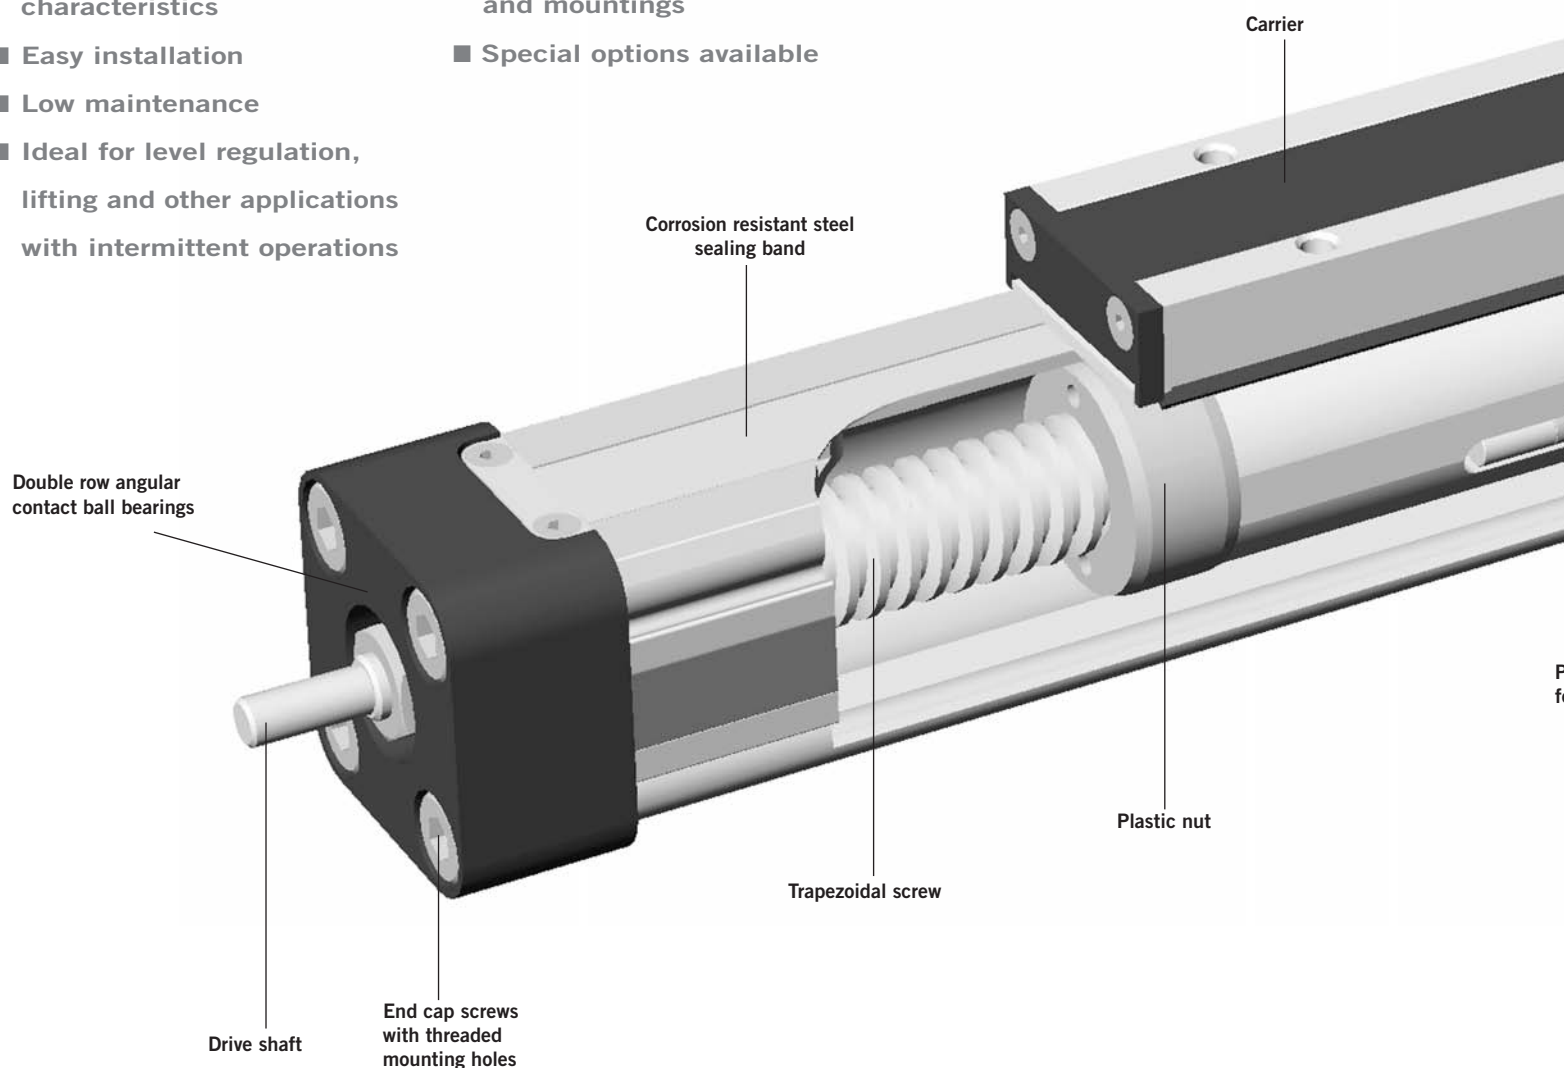

Take the easy route and load all the dimensions into your system. The file is suitable for all current CAD systems – available on CD-Rom or at www.hoerbiger.com

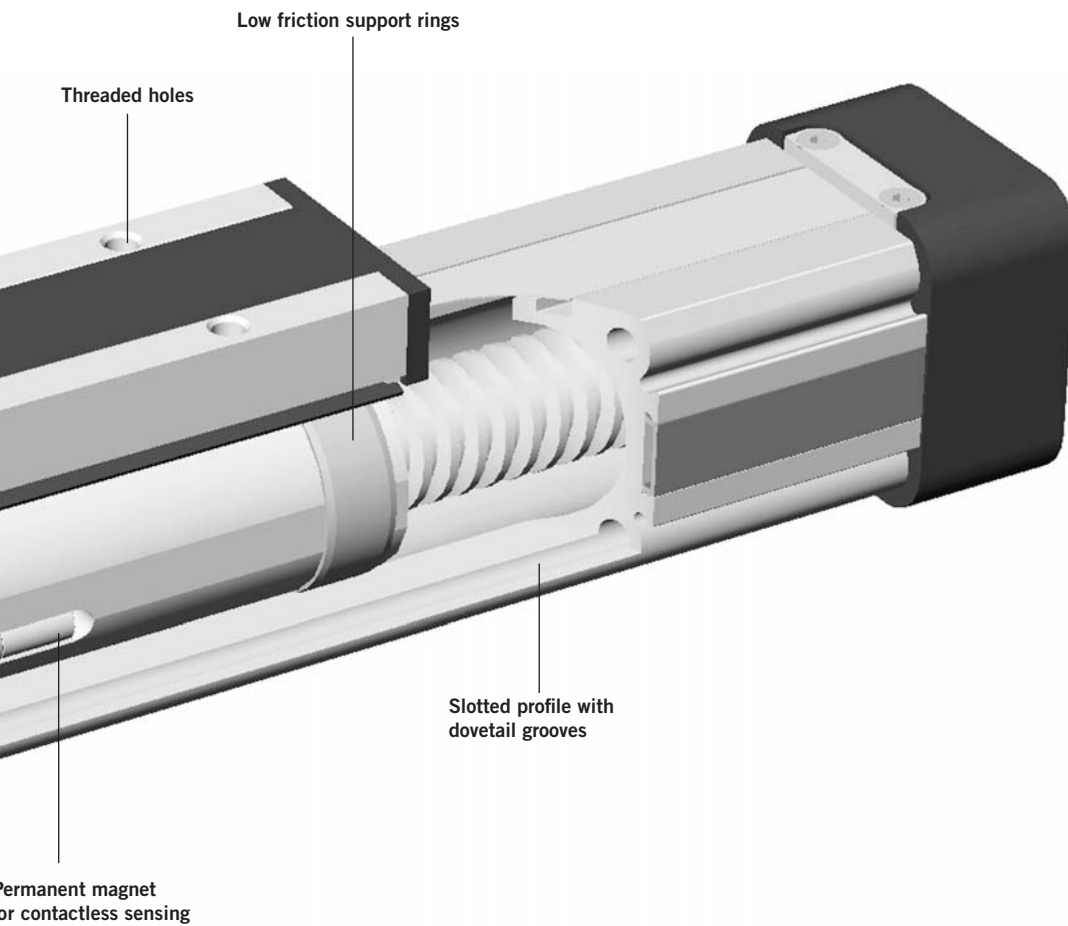

The dovetailed mounting rails of the new linear drive expand its function into that of a universal system carrier. Modular system components are simply clamped on.



SLIDELINE
Combination with sliding guide for heavy-duty operation




POWERSLIDE
Roller bearing precision guidance for smooth travel and high dynamic or static loads.




PROLINE
The compact aluminium roller guide for high loads and velocities.



Heavy Duty guide HD
linear guides for heavy duty applications



SFI-plus
displacement measuring system




SERIES OSP-E, LINEAR DRIVE WITH TRAPEZOIDAL SCREW DRIVE AND INTERNAL PLAIN BEARING GUIDE

STANDARD VERSIONS OSP-E..ST

Data Sheet 1.35.002E-1, -2

Standard carrier with internal guidance and integrated magnet set for contactless position sensing. Dovetail profile for mounting of accessories and the actuator itself.

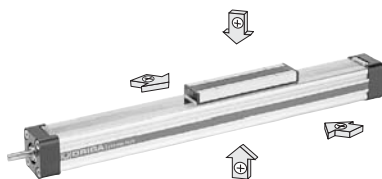

ACCESSORIES

MOTOR MOUNTINGS

Data Sheet 1.44.006E-5



END CAP MOUNTING

Data Sheet 1.44.010E-4


For end-mounting of the actuator



MID-SECTION SUPPORT

Data Sheet 1.44.010E-9


For supporting long drives or mounting the linear drive on the dovetail grooves.

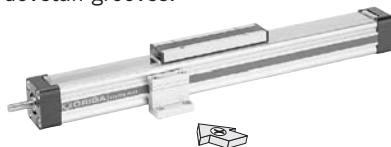

CLEVIS MOUNTING

Data sheet 1.44.010E-14, -15

Carrier with tolerance and parallelism compensation to drive external linear guides.

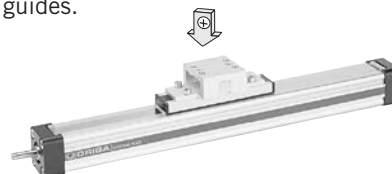

INVERSION MOUNTING

Data Sheet 1.44.010E-16

The inversion mounting, mounted on the carrier, transfers the driving force to the opposite side, e.g. for dirty environments.



MAGNETIC SWITCHES SERIES RS UND ES

Data sheet 1.44.030E

For contactless position sensing of end stop and intermediate carrier positions.



A3P154E00FAG0X

The right to introduce technical modifications is reserved

Characteristics			
Characteristics	Symbol	Unit	Description
General Features			
Series			OSP-E..ST
Name			Linear Drive with Trapezoidal Screw Drive
Mounting			See drawings
Temperature Range	$\vartheta_{\min}$ $\vartheta_{\max}$	°C °C	-20 +70
Weight (mass)		kg	See table
Installation			In any position
Material	Slotted profile		Extruded anodized aluminium
	Trapezoidal screw		Cold rolled steel
	Drive nut		Thermoplastic polyester
	Guide bearings		Low friction plastic
	Sealing band		Hardened, corrosion resistant steel
	Screws, nuts		zinc plated steel
	Mountings		zinc plated steel and aluminium
Encapsulation class		IP	54

Weight (mass) and Inertia					
Series	Weight (mass)[kg]		Moving mass	Inertia [x 10 ⁻⁶ kgm ²]	
	At stroke 0 m	Add per metre stroke		At stroke 0 m	Add per metre
OSP-E25ST	0.9	2.8	0.2	6	29.6
OSP-E32ST	2.1	5.0	0.5	21.7	81
OSP-E50ST	5.1	10.6	1.3	152	400

Installation Instructions

Use the threaded holes in the free end cap and a mid-section support close to the motor end for mounting the linear drive.

See if mid-section supports are needed using the maximum permissible unsupported length graph on data sheet 1.35.002E-3. At least one end cap must be secured to prevent axial sliding when mid-section support is used.

When the linear drive is moving an externally guided load, the clevis mounting must be used (see data sheet 1.44.010E-13,-14).

The linear drives can be fitted with the standard carrier mounting facing in any direction.

To prevent contamination such as fluid ingress, the drive should be fitted with its sealing band facing downwards.

The inversion mounting can be fitted to transfer the driving force to the opposite side (see data sheet 1.44.010E-15).

Maintenance

All moving parts are long-term lubricated for a normal operational environment. HOERBIGER-ORIGA recommends a check and lubrication of the linear drive, and if necessary a change of wear parts, after an operation time of 12 months or 300 km travel of distance. Please refer to the operating instructions supplied with the drive.

First service start-up

The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the linear drive machine into service, the user must ensure the adherence to the EC Machine Directive 91/368/EEC.

Linear Drive with Trapezoidal Screw Drive

Series OSP-E..ST
Size 25, 32, 50



Standard Versions:

- Standard carrier with internal plain bearing guide
- Dovetail profile for mounting of accessories and the actuator itself
- Pitch of Trapezoidal Spindle:
Type OSP-E25ST : 4 mm
Type OSP-E32ST: 4 mm
Type OSP-E50ST: 6 mm

Options:

- Displacement Measuring System SFI-plus (data sheet 1.44.035E)
- Keyway



Linear guides see 1.40.020E to 024E
Magnetic switches see 1.44.030E
Mountings and accessories see 1.44.006E, 1.44.010E

Sizing Performance Overview

Maximum Loadings

Sizing of Linear Drive

The following steps are recommended for selection :


1. Check that maximum values in the table T3 are not exceeded.
2. Check the maximum values in graph on data sheet 1.35.002E-4 are not exceeded.
3. When sizing and specifying the motor, the RMS-average torque must be calculated using the cycle time of the application.
4. Check that the maximum allowable unsupported length is not exceeded (see on data sheet 1.35.002E-3).

Performance Overview				
Characteristics	Unit	Description		
Size		OSP-E25ST	OSP-E32ST	OSP-E50ST
Pitch	[mm]	4	4	6
Max. speed	[m/s]	0.1	0.1	0.15
Linear motion per revolution drive shaft	[mm]	4	4	6
Max. rpm, drive shaft	[min ⁻¹]	1500	1500	1500
Max. effective action force F_A	[N]	600	1300	2 500
Corresponding torque on drive shaft	[Nm]	1.35	3.2	8.8
No-load torque	[Nm]	0.3	0.4	0.5
Max. allowable torque on drive shaft	[Nm]	1.55	4.0	9.4
Self-locking force $F_L^{1)}$	[N]	600	1300	2500
Repeatability	[mm/m]	±0.5	±0.5	±0.5
Max. Standard stroke length	[mm]	1100	2000	2500*

¹⁾ Related to screw types Tr 16x4, Tr 20x4, TR 30x6
see data sheet 1.35.002E-1 – for inertia.

* For strokes longer than 2000 mm in horizontal applications, please contact our customer support.

Forces, loads and moments

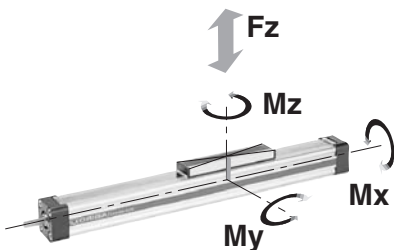

$$M = F \cdot l \text{ [Nm]}$$

$$M_x = M_{x \text{ static}} + M_{x \text{ dynamic}}$$

$$M_y = M_{y \text{ static}} + M_{y \text{ dynamic}}$$

$$M_z = M_{z \text{ static}} + M_{z \text{ dynamic}}$$

The distance l (l_x , l_y , l_z) for calculation of the bending moments relates to the centre axis of the linear drive.

Maximum Permissible Loads

T3

Size	Max. applied load [N] F_z	Max. moments [Nm]		
		M_x	M_y	M_z
OSP-E25ST	500	2	24	7
OSP-E32ST	1000	6	65	12
OSP-E50ST	1500	13	155	26

Equation for Combined Loads

$$\frac{F_z}{F_z \text{ (max)}} + \frac{M_x}{M_x \text{ (max)}} + \frac{M_y}{M_y \text{ (max)}} + \frac{M_z}{M_z \text{ (max)}} \leq 1$$


The total of the loads must not exceed >1 under any circumstances.

Combined Loads


If the linear drive is subjected to several forces, loads and moments at the same time, the maximum load is calculated with the equation shown here.

The maximum permissible loads must not be exceeded.

Maximum Permissible Unsupported Length – Placing of Mid-Section Support

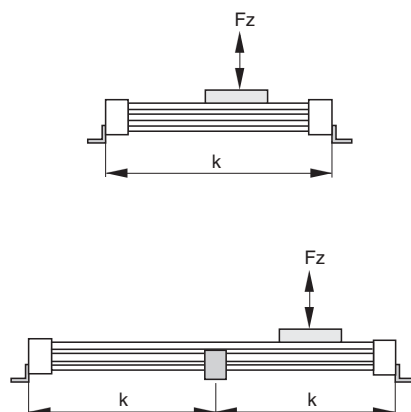

k = Maximum permissible distance between mountings/mid-section support for a given load F.

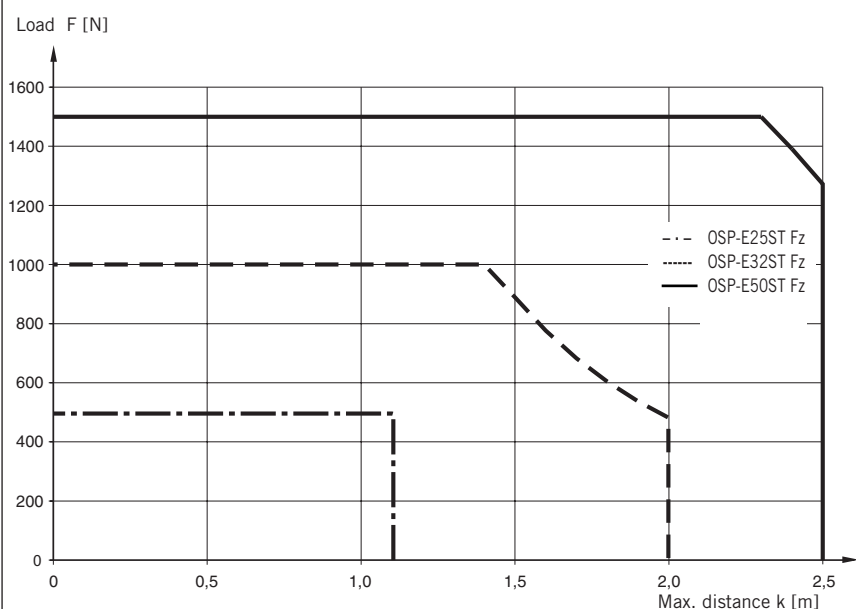

(Up to the curve in the above graph the deflection will be max. 0.2 % of distance k.)

Maximum Permissible Unsupported Length

Stroke Length

The stroke lengths of the linear drives are available in multiples of 1 mm up to the following maximum stroke lengths.

OSP-E25ST: max. 1100 mm

OSP-E32ST: max. 2000 mm

OSP-E50ST: max. 2500 mm *

Other stroke lengths are available on request.

* For strokes longer than 2000 mm in horizontal applications, please contact our customer support

The end of stroke must not be used as a mechanical stop.

Allow an additional safety clearance of minimum 25 mm at both ends.

The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems.

For advise, please contact your local HOERBIGER-ORIGA technical support department.


When mechanical stops are required, external shock absorbers should be used (see separate data sheet). Align the centreline of the shock absorber as closely as possible with the object's centre of gravity.

Mounting on the Drive Shaft

Do not expose the drive shaft to uncontrolled axial or radial forces when mounting coupling or belt wheel, a steadying block should be used.

Belt wheels


Minimum allowable number of teeth (AT5) and diameter of belt wheel at maximum applied torque.

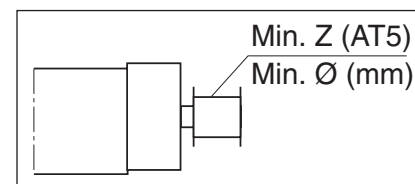

Size	Min. Z	Min. ø
OSP-E25ST	24	38
OSP-E32ST	24	38
OSP-E50ST	36	57

Maximum rpm / Stroke


At longer strokes the speed has to be reduced according to the adjacent graphs.

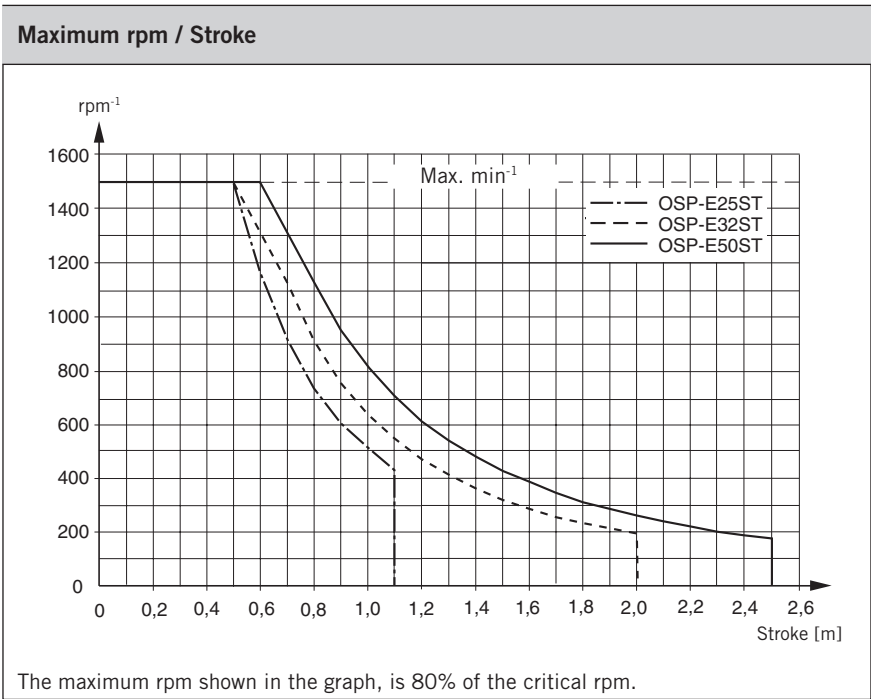


Performance / Action Force

The Linear Drives are designed for a 10% intermittent usage.

The performance to be expected depends on the maximum required actions force of the application. An increase of the action force will lead to a reduced performance.

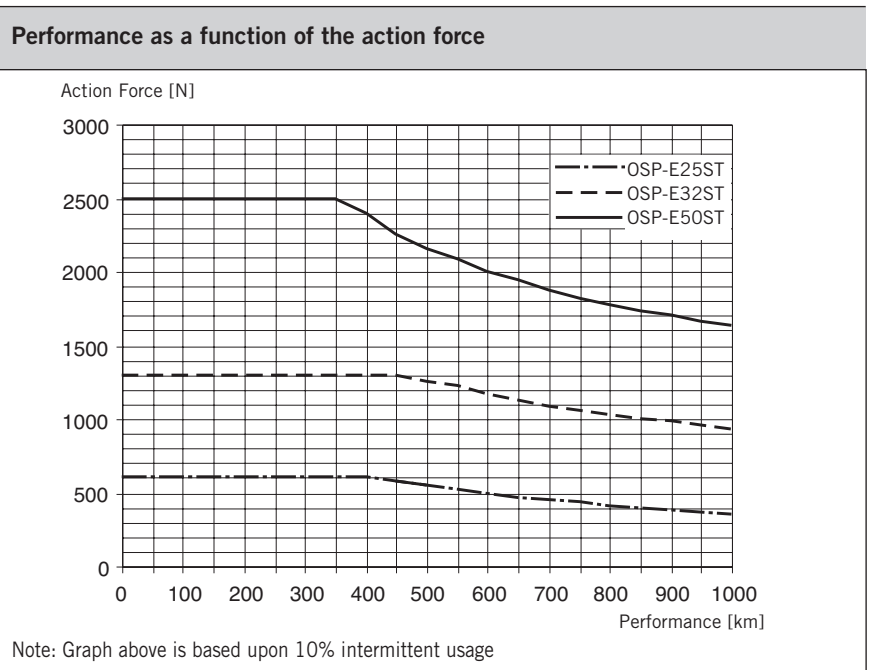

**Linear Drive with Trapezoidal Screw Drive – Basic Unit
Series OSP-E..ST**

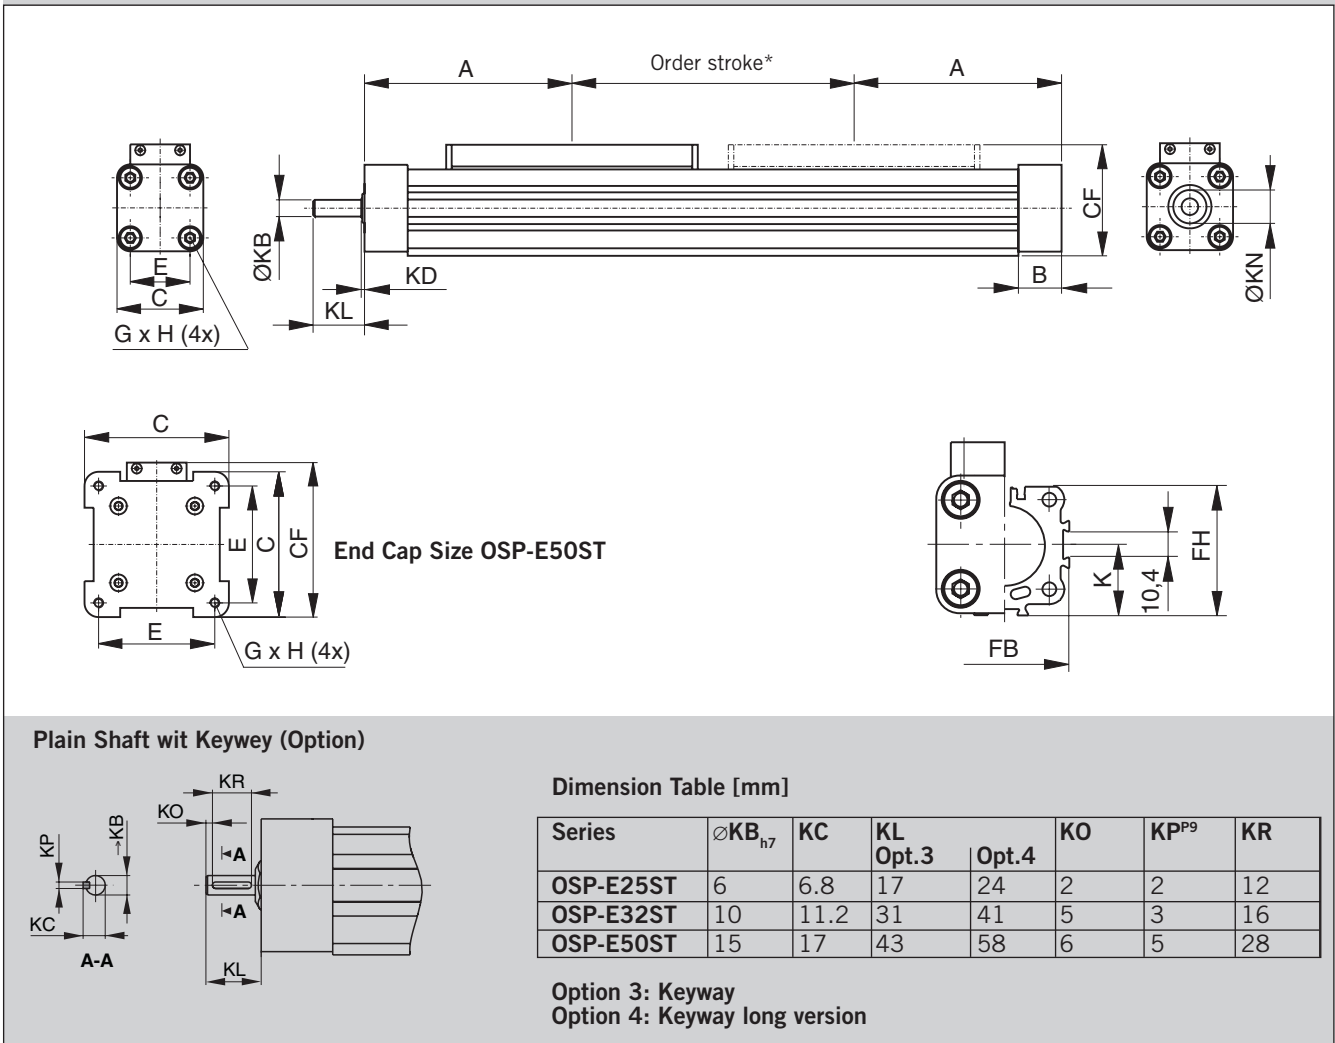

*** NOTE:**


The mechanical end position must not be used as a mechanical end stop. Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 25 mm.

Order stroke = required travel + 2 x safety distance.

The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems.

For further information, please contact your local HOERBIGER-ORIGA representative.

**Standard Carrier
Series OSP-E..ST**

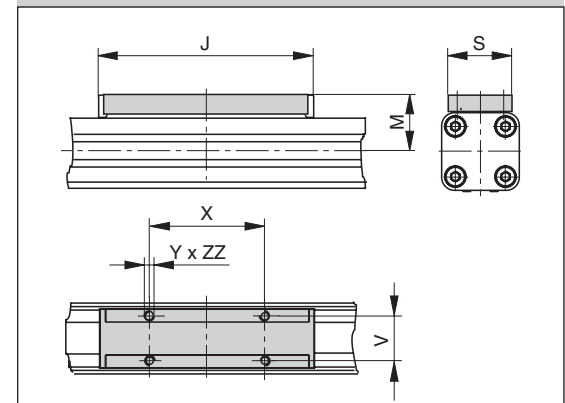

Dimension Table [mm]

Series	A	B	C	E	G x H	J	K	M	S	V	X	Y	CF	FB	FH	KB	KD	KL	KN	ZZ
OSP-E25ST	100	22	41	27	M5 x 10	117	21.5	31	33	25	65	M5	52.5	40	39.5	6 _{h7}	2	17	13	8
OSP-E32ST	125	25.5	52	36	M6 x 12	152	28.5	38	36	27	90	M6	66.5	52	51.7	10 _{h7}	2	31	20	10
OSP-E50ST	175	33	87	70	M6 x 12	200	43	49	36	27	110	M6	92.5	76	77	15 _{h7}	3	43	28	10

Order Instructions

		OSP-E	25	-	2	0	4	0	0	-	00500	
			▲		▲	▲	▲		▲		▲	
Size												Stroke
25	Size 25											Input (five digits) in mm
32	Size 25											
50	Size 25											
Type of drive												Drive shaft
2	Trapezoidal Screw											0 Plain
												3 Keyway (Option)
												4 Keyway long version (Option)
Carrier												
0	Standard											
4	Displacement Measuring System SFI-plus (Option)											
Pitch												
4	4 mm (sizes 25, 32)											
6	6 mm (size 50)											

Accessories - please order separately

Description	For more informations see Data Sheet No.
Coupling Housing	1.44.006E-5
End Cap Mounting	1.44.010E-4
Mid-Section Support	1.44.010E-9
Adapter Profile	1.44.010E-10
T-Nut Profile	1.44.010E-11
Clevis Mounting	1.44.010E-14, -15
Inversion Mounting	1.44.010E-16
Magnetic Switches	1.44.030E
Drive systems and components for electric linear drives OSP-E	A4P019E

Linear Drive with Ball Screw Drive and Piston Rod Series OSP-E..SBR



Contents

Description	Data Sheet No.	Page
Overview	1.35.020E	69-72
Technical Data	1.35.021E-1 to 2	73-75
Dimensions	1.35.021E-3	75
Order Instructions	1.35.021E-4	76

ELECTRIC LINEAR DRIVE FOR PRECISE AND HIGH SPEED POSITIONING OF HIGH MASSES

A completely new generation of linear drives which can be integrated into any machine layout neatly and simply.


Linear Drive with Ball Screw Drive, Internal Plain Bearing Guide and Piston Rod


Advantages

- High output force
- Excellent running characteristics
- Accurate path and position control
- High levels of repeatability

Features

- Extending drive rod
- Ball screw spindle
- Non-rotating drive rod
- Continuous duty operation
- Large range of accessories

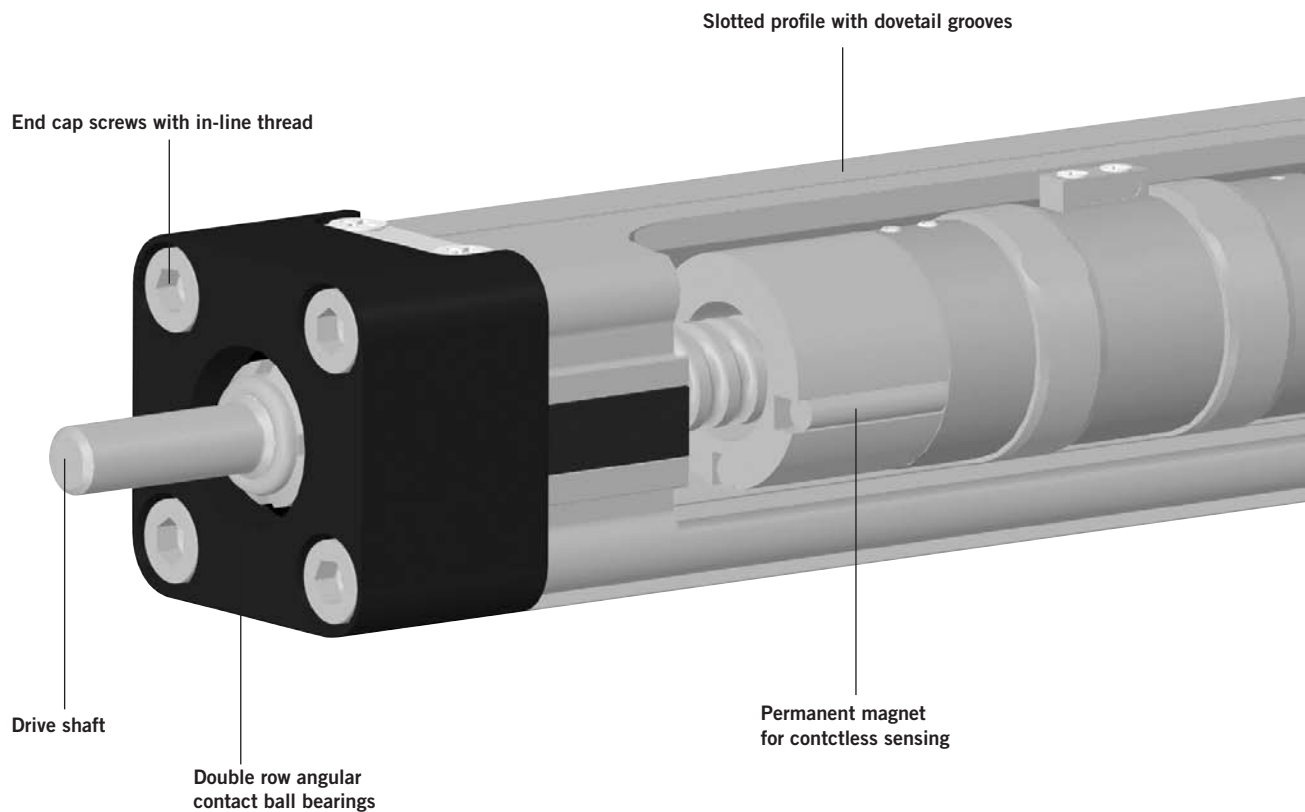

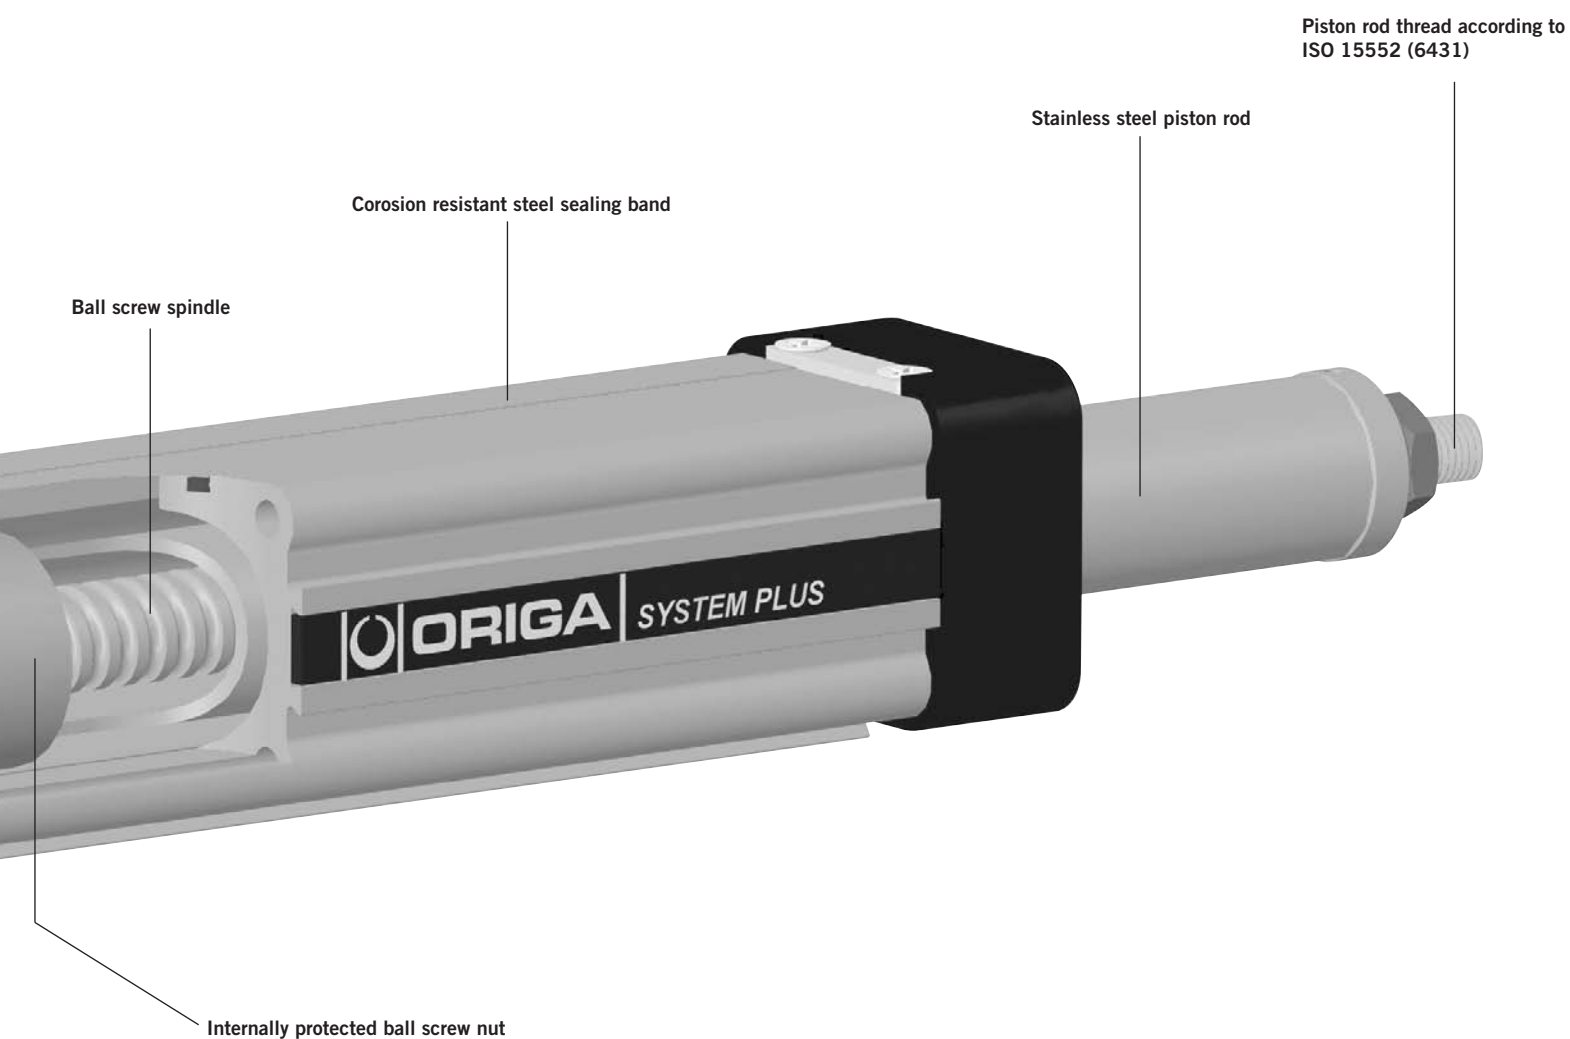

Take the easy route and load all the dimensions into your system. The file is suitable for all current CAD systems – available on CD-Rom or at www.hoerbiger.com



OPTIONS AND ACCESSORIES

SERIES OSP-E, LINEAR DRIVE WITH BALL SCREW DRIVE, INTERNAL PLAIN BEARING GUIDE AND PISTON ROD

STANDARD VERSIONS OSP-E..SBR

Data Sheet 1.35.021E-1,-2,-3,-4

Standard carrier with internal guidance and integrated magnet set for contactless position sensing. Dovetail profile for mounting of accessories and the actuator itself.



BALL SCREW PITCH

The ball screws spindles are available in various pitches:

OSP-E25SBR: 5 mm

OSP-E32SBR: 5, 10 mm

OSP-E50SBR: 5, 10, 25 mm

END CAP MOUNTING

Data Sheet 1.44.010E-5

For end-mounting the actuator on the extending rod side

MID SECTION SUPPORT

Data Sheet 1.44.010E-9

For mounting the actuator on the dovetail grooves and on the motor end



FLANGE MOUNTING C

Data Sheet 1.44.010E-6

For end-mounting the actuator on the extending rod side.



TRUNNION MOUNTING EN

Data Sheet 1.44.010E-13

Trunning mounting EN in combination with pivot mounting EL.

– steplessly adjustable in axial direction.



PISTON ROD EYE

Data Sheet 1.44.018E-2



PISTON ROD CLEVIS

Data Sheet 1.44.018E-2



PISTON ROD COMPENSATING COUPLING

Data Sheet 1.44.018E-3

For compensating of radial and angular misalignments



ACCESSORIES

MOTOR MOUNTINGS

Data Sheet 1.44.006E-5



MAGNETIC SWITCHES SERIES RS AND ES

Data Sheet 1.44.030E

For contactless position sensing of end stop and intermediate carrier positions.



A1P702E00GAG50X

The right to introduce technical modifications is reserved

Characteristics			
Characteristics	Symbol	Unit	Description
General Features			
Series			OSP-E..SBR
Name			Linear drive with ball screw drive and piston rod
Mounting			see drawings
Temperature range	$\vartheta_{\min}$ $\vartheta_{\max}$	°C °C	-20 +80
Weight (Mass)		kg	see table
Installation			In any position
Material	Slotted profile		Al anodized
	Ball screw		Steel
	Ball nut		Steel
	Piston rod		Stainless steel
	Guide bearings		Low friction plastic
	Sealing band		Hardened, corrosion resistant steel
	Screws, nuts		Zinc plated steel
	Mountings		Zinc plated steel and aluminium
Encapsulation class		IP	54

Weight (Mass) and Inertia						
Series	Weight (Mass) [kg]		Moving Mass [kg]		Inertia [x 10 ⁻⁶ kgm ²]	
	At stroke 0 m	Add per metre stroke	At stroke 0 m	Add per metre stroke	At stroke 0 m	Add per metre stroke
OSP-E25SBR	0.7	3.0	0.2	0.9	1.2	11.3
OSP-E32SBR	1.7	5.6	0.6	1.8	5.9	32.0
OSP-E50SBR	4.5	10.8	1.1	2.6	50.0	225.0

Installation Instructions

Use the threaded holes in the free end cap and a mid-section support close to the motor end for mounting the linear actuator.

Maintenance

All moving parts are long-term lubricated for a normal operational environment. HOERBIGER-ORIGA recommends a check and lubrication of the linear drive, and if necessary a change of wear parts, after an operation time of 12 months or 3000 km travel of distance. Please refer to the operating instructions supplied with the drive.

First service start-up

The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the linear drive machine into service, the user must ensure the adherence to the EC Machine Directive 91/368/EEC.

Linear Drive with Ball Screw Drive and Piston Rod

Series OSP-E..SBR
Size 25, 32, 50



Standard Version:

- Standard carrier with internal plain bearing guide
- Pitches of Ball Screw Spindle:
Type OSP-E25SBR : 5 mm
Type OSP-E32SBR: 5, 10 mm
Type OSP-E50SBR: 5, 10, 25 mm

Option:

- Key way version



For **magnetic switches** see 1.44.030E
For **mountings and accessories** see 1.44.006E, 1.44.010E, 1.44.018E

Sizing Performance Overview Maximum Loadings

Sizing of Linear Drive



The following steps are recommended for selection :

- 1.Check that the maximum values in the adjacent chart and transverse force/stroke graph below are not exceeded.
- 2.Check the lifetime/travel distance in graph below.
- 3.When sizing and specifying the motor, the RMS-average torque must be calculated using the cycle time in application.

Performance overview							
Characteristics	Unit	Description					
Series		OSP-E25SBR		OSP-E32SBR		OSP-E50SBR	
Pitch	[mm]	5	5	10	5	10	25
Max. speed	[m/s]	0.25	0.25	0.5	0.25	0.5	1.25
Linear motion per revolution drive shaft	[mm]	5	5	10	5	10	25
Max. rpm drive shaft	[min ⁻¹]	3000	3000		3000		
Max. effective action force F _A Corresponding torque drive shaft	[N] [Nm]	260 0.45	900 1.1	1.8	1200 1.3	2.8	6.0
No-load torque	[Nm]	0.2	0.2	0.3	0.3	0.4	0.5
Max. allowable torque on drive shaft	[Nm]	0.6	1.5	2.8	4.2	7.5	20
Max. allowable acceleration	[m/s ²]	5	5		5		
Typical repeatability	[mm/m]	±0.05	±0.05		±0.05		
Max.Standard stroke length	[mm]	500	500		500		


Transverse Force / Stroke

The permissible transverse force is reduced with increasing stroke length. according to the adjacent graphs.

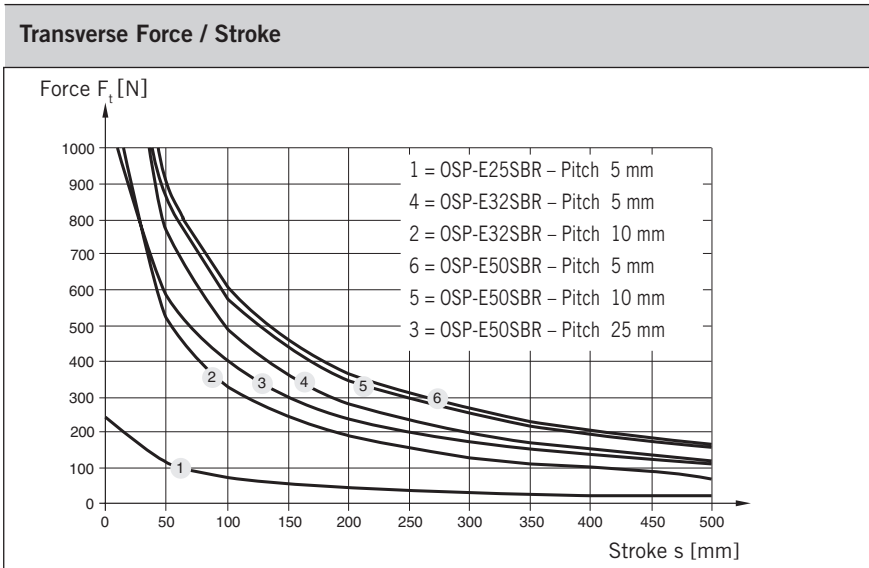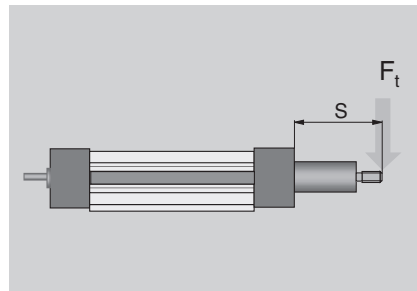


Maximum rpm / Stroke

At longer stokes the speed has to be reduced according to the adjacent graphs.

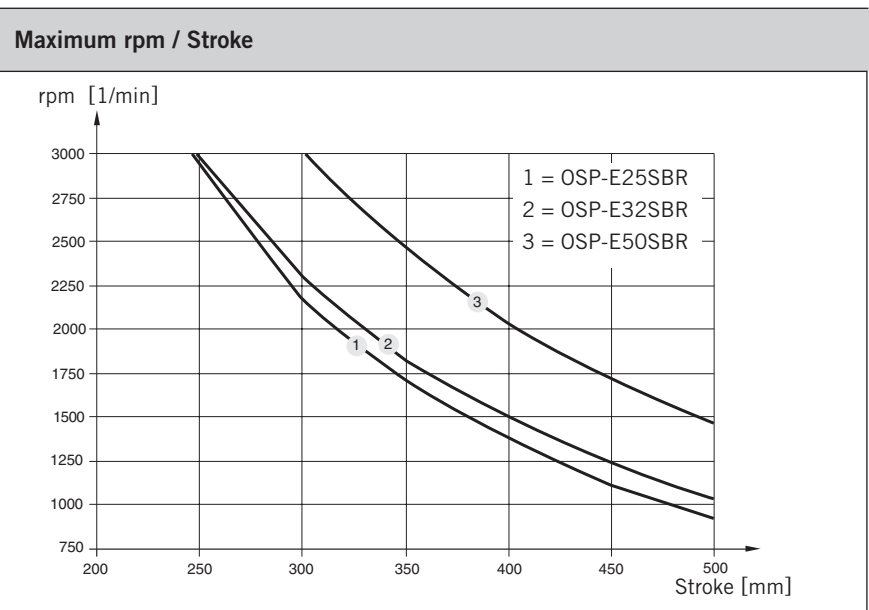


Performance as a function of the action force

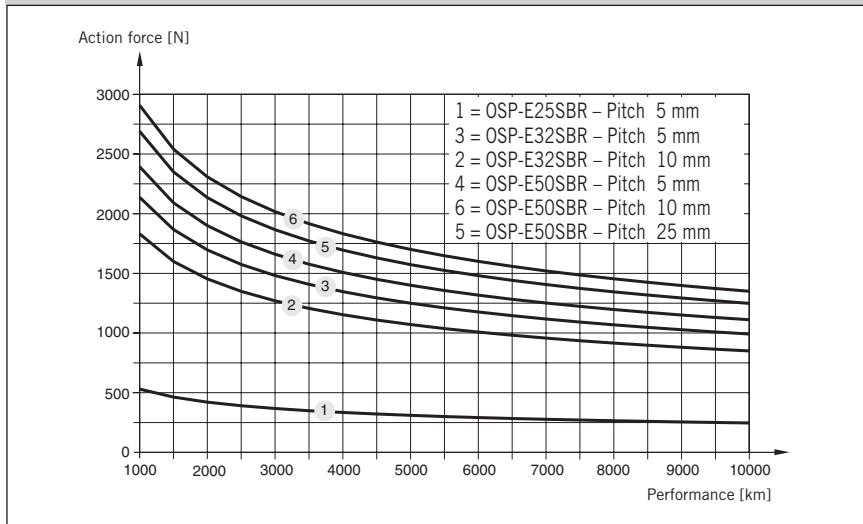


Performance / Action force

The performance to be expected depends on the maximum required actions force of the application. An increase of the action force will lead to a reduced performance.

Linear Drive with Ball Screw Drive and Piston Rod – Basic Unit Series OSP-E...SBR

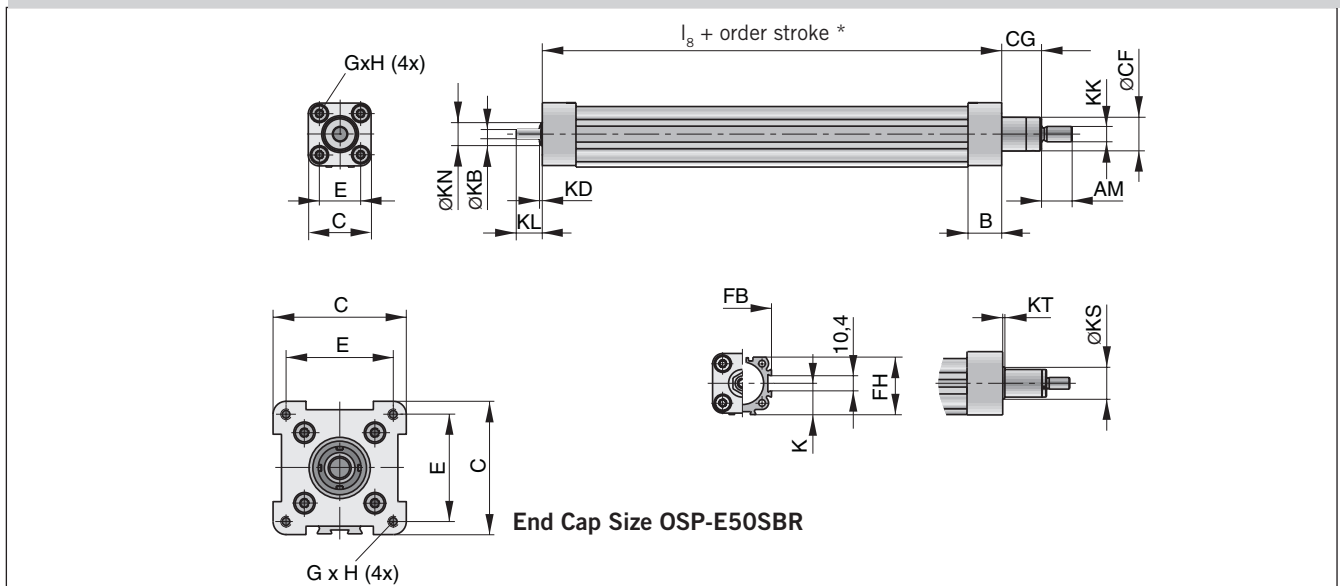

Plain shaft with keyway (Option)



Dimension Table [mm]

Series	ØKB _{h7}	KC	KL Opt.3	Opt.4	KO	KP ^{P9}	KR
OSP-E25SBR	6	6.8	17	24	2	2	12
OSP-E32SBR	10	11.2	31	41	5	3	16
OSP-E50SBR	15	17	43	58	6	5	28

Option 3: Keyway

Option 4: Keyway long version

* Note:

The mechanical end position must not be used as a mechanical end stop. Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 25 mm.

Order stroke = required travel + 2 x safety distance.

The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems.

For further information, please contact your local HOERBIGER-ORIGA representative.

Dimension Table [mm]

Series	B	C	E	G x H	K	I _g	AM	ØCF	CG	FB	FH	ØKB	KD	KK	KL	ØKN	ØKS	KT
OSP-E25SBR	22	41	27	M5 x 10	21.5	110	20	22	26	40	39.5	6 _{h7}	2	M10x1.25	17	13	–	–
OSP-E32SBR	25.5	52	36	M6 x 12	28.5	175.5	20	28	26	52	51.7	10 _{h7}	2	M10x1.25	31	20	33	2
OSP-E50SBR	33	87	70	M6 x 12	43	206	32	38	37	76	77	15 _{h7}	3	M16x1.5	43	28	44	3

Order Instructions

		OSP-E	25	-	4	0	5	0	0	- 00500
			▲		▲		▲		▲	
Size										Stroke
25	Size 25									Input (five digits) in mm
32	Size 25									
50	Size 25									
Type of Drive										Drive Shaft
4	Ball Screw									0 Plain
										3 Keyway (Option)
										4 Keyway long version(Option)
Pitch										
5	5 mm (Size 25, 32, 50)									
7	10 mm (Size 32, 50)									
8	25 mm (Size 50)									

Accessories - please order separately

Description	For more Information see Data Sheet No.
Motor Mountings	1.44.006E-5
End Cap Mountings	1.44.010E-5
Mid-Section Support	1.44.010E-9
Flange Mounting C	1.44.010E-6
Trunnion Mounting	1.44.010E-13
Adaptor Profile	1.44.010E-10
T-Nut Profile	1.44.010E-11
Piston Rod Clevis according to ISO 8140	1.44.018E-2
Piston Rod Eye according to ISO 8139	1.44.018E-2
Piston Rod Compensating Coupling	1.44.018E-3
Magnetic Switches	1.44.030E
Drive systems and components for electric linear drives OSP-E	A4P019E

Linear Drive with Trapezoidal Screw Drive and Piston Rod Series OSP-E..STR



Contents

Description	Data Sheet No.	Page
Overview	1.35.010E	77-80
Technical Data	1.35.011E-1 to 2	81-82
Dimensions	1.35.011E-3	83
Order Instructions	1.35.011E-4	84

ELECTRIC LINEAR DRIVE FOR INTERMITTENT APPLICATIONS

A completely new generation of linear drives which can be integrated into any machine layout neatly and simply.


Linear Drive with Trapezoidal Screw Drive, Internal Plain Bearing Guide and Piston Rod


Advantages

- Accurate path and position control
- High force output
- Self-locking
- Excellent slow speed characteristics
- Easy installation
- Low maintenance
- Ideal for level regulation, lifting and other applications with intermittent operations

Features

- Piston rod-end dimensions conforming to ISO pneumatic standards
- Complete motor and control packages
- Diverse range of accessories and mountings
- Special options available

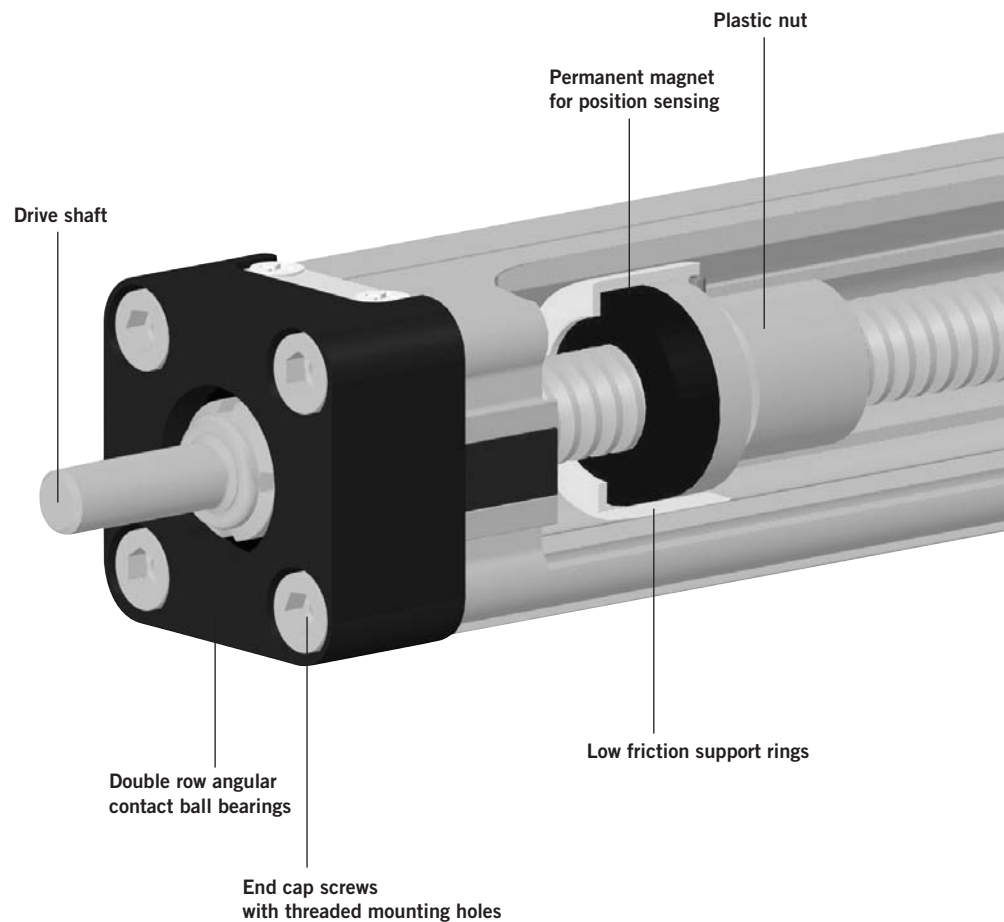

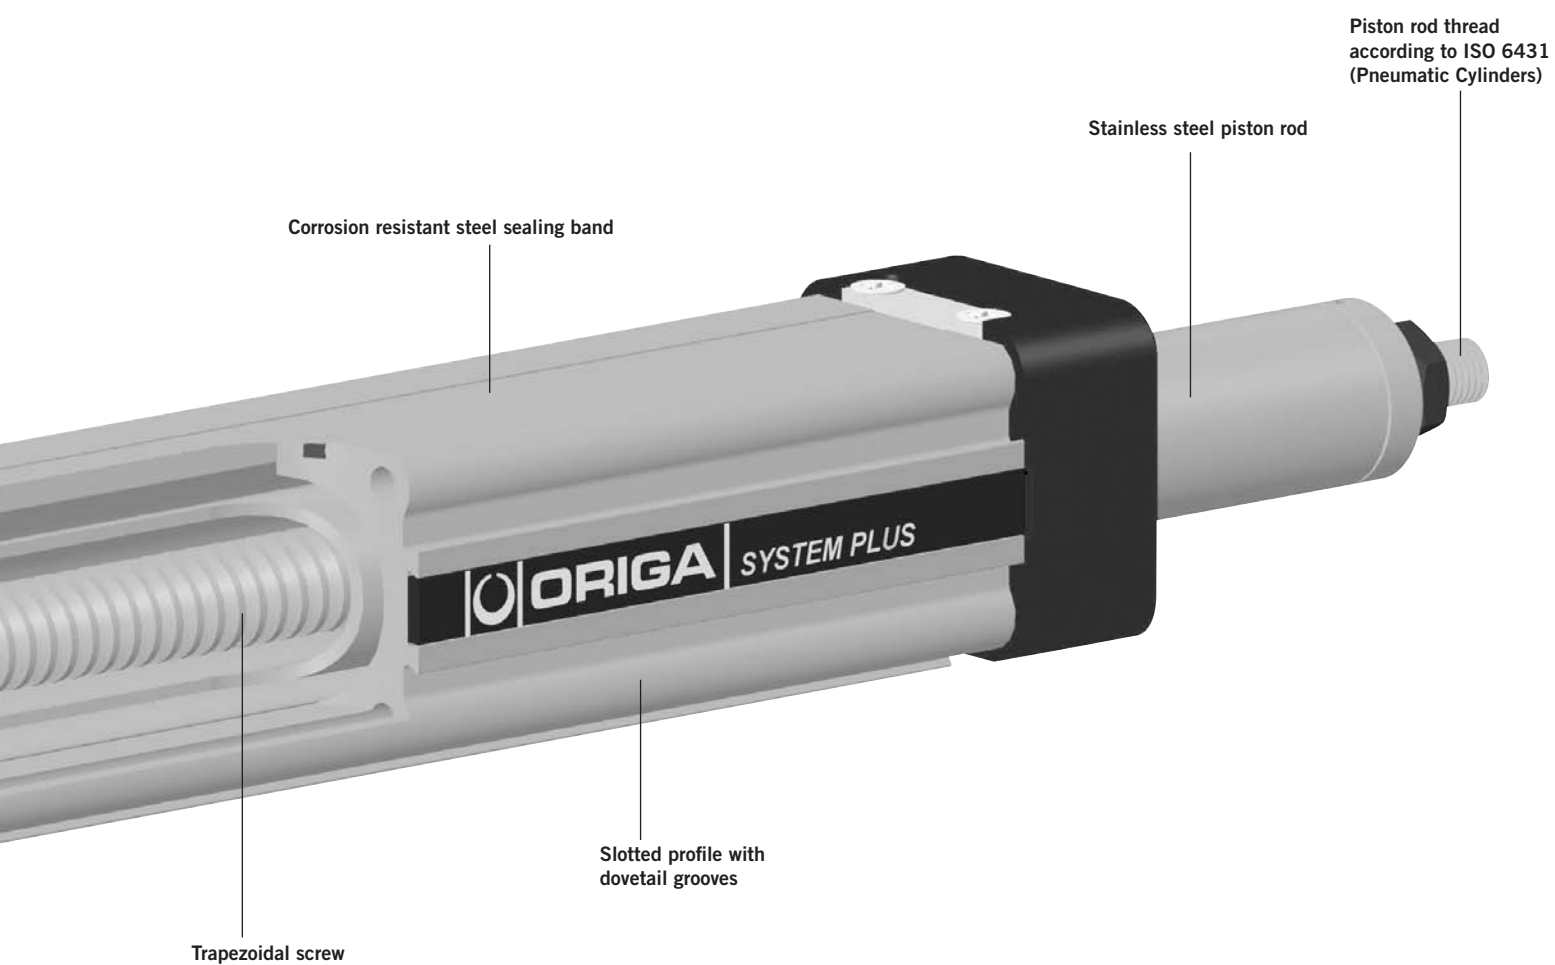

Take the easy route and load all the dimensions into your system. The file is suitable for all current CAD systems – available on CD-Rom or at www.hoerbiger.com



OPTIONS AND ACCESSORIES

SERIES OSP-E, LINEAR DRIVE WITH TRAPEZOIDAL SCREW DRIVE, INTERNAL PLAIN BEARING GUIDE AND PISTON ROD

STANDARD VERSIONS OSP-E..STR

Data Sheet 1.35.011E-1,-2,-3,-4

Standard carrier with internal guidance and integrated magnet for contactless position sensing. Dovetail profile for mounting of accessories and the actuator itself.



FLANGE MOUNTING C

Data Sheet 1.44.010E-5

For end-mounting the actuator on the extending rod side



PISTON ROD CLEVIS

Data Sheet 1.44.018E-2



TRUNNION MOUNTING EN

Data Sheet 1.44.010E-13

Trunning mounting EN in combination with pivot mounting EL.

– steplessly adjustable in axial direction.



PISTON ROD COMPENSATING COUPLING

Data Sheet 1.44.018E-3

For compensating of radial and angular misalignment.



ACCESSORIES

MOTOR-MOUNTINGS

Data Sheet 1.44.006E-5



END CAP MOUNTING

Data Sheet 1.44.010E-4

For end-mounting the actuator on the extending rod side.

MID SECTION SUPPORT

Data Sheet 1.44.010E-8

For mounting the actuator on the dovetail grooves and on the motor end.



PISTON ROD EYE

Data Sheet 1.44.018E-2



MAGNETIC SWITCHES SERIES RS AND ES

Data Sheet 1.44.030E

For contactless position sensing of end stop and intermediate carrier positions.



A3P154EOGGAGOX

The right to introduce technical modifications is reserved

Characteristics			
Characteristics	Symbol	Unit	Description
General Features			
Series			OSP-E..STR
Name			Linear Drive with Trapezoidal Screw Drive and Piston Rod
Mounting			See drawings
Temperature Range	$\vartheta_{\min}$ $\vartheta_{\max}$	°C °C	-20 +70
Weight (mass)		kg	See table
Installation			In any position
Material	Slotted profile		Extruded anodized aluminium
	Trapezoidal screw		Cold rolled steel
	Drive nut		Thermoplastic polyester
	Piston rod		Stainless steel
	Sealing band		Hardened, corrosion resistant steel
	Guide bearings		Low friction plastic
	Screws, nuts		zinc plated steel
	Mountings		zinc plated steel and aluminium
Encapsulation class		IP	54

Weight (mass) and Inertia						
Series	Weight (mass)[kg]		Moving mass [kg]		Inertia [x 10 ⁻⁶ kgm ²]	
	At stroke 0 m	Add per metre stroke	At stroke 0 m	Add per metre stroke	At stroke 0 m	Add per metre
OSP-E25STR	0.4	2.9	0.1	0.7	1.1	10.3
OSP-E32STR	0.9	5.4	0.2	1.2	3.9	29.6
OSP-E50STR	2.4	10.6	0.8	1.6	24.6	150

Installation Instructions

Use the threaded holes in the free end cap and a mid-section support close to the motor end for mounting the linear actuator.

The linear actuator can be fitted in any position. To prevent contamination such as fluid ingress, the actuator should be fitted with its sealing band facing downwards.

Maintenance

All moving parts are long-term lubricated for a normal operational environment. HOERBIGER-ORIGA recommends a check and lubrication of the linear drive, and if necessary a change of wear parts, after an operation time of 12 months or 300 km travel of distance. Please refer to the operating instructions supplied with the drive.

First service start-up

The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the linear drive machine into service, the user must ensure the adherence to the EC Machine Directive 91/368/EEC.

Contactless position sensing

Please use the magnetic switch mentioned below:

KL3096 (Type RS-K, normally closed, Reed-contact, with cable)

KL3098 (Type ES-S, Magnetic electronic, PNP-switch with DIN-plug)

For more informations see data sheet 1.44.030E

Linear Drive with Trapezoidal Screw Drive and Piston Rod

Series OSP-E..STR
Size 25, 32, 50



Standard Version:

- Dovetail profile for mounting of accessories and the actuator itself
- Pitch of Trapezoidal Spindle:
Type OSP-E25STR: 3 mm
Type OSP-E32STR: 4 mm
Type OSP-E50STR: 5 mm



For **magnetic switches** see 1.44.030E
For **mountings and accessories** see 1.44.006E, 1.44.010E, 1.44.018E

Sizing Performance Overview Maximum Loadings

Sizing of Linear Drive

The following steps are recommended for selection :


1. Check that the maximum values in the adjacent chart and transverse force/stroke graph below are not exceeded.
2. Check the lifetime/travel distance in graph below.
3. When sizing and specifying the motor, the RMS-average torque must be calculated using the cycle time in application

Performance Overview				
Characteristics	Unit	Description		
Size		OSP-E25STR	OSP-E32STR	OSP-E50STR
Pitch	[mm]	3	4	5
Max. speed	[m/s]	0.075	0.1	0.125
Linear motion per revolution, drive shaft	[mm]	3	4	5
Max. rpm, drive shaft	[min ⁻¹]	1500 ²⁾	1500	1500
Max. effective action force F_A	[N]	800	1600	3300
Corresponding torque on drive shaft	[Nm]	1.35	3.4	9.25
No-load torque	[Nm]	0.3	0.4	0.5
Max. allowable torque on drive shaft	[Nm]	1.7	4.4	12
Self-locking force F_L ¹⁾	[N]	800	1600	3300
Typical repeatability	[mm/m]	±0,5	±0,5	±0,5
Max. Standard stroke length	[mm]	500	500	500


¹⁾ Related to screw types Tr 12x3, Tr 16x4, Tr 24x5
see data sheet 1.35.011-1 – for inertia

²⁾ from 0,4 m stroke max. 1200 min⁻¹ permissible

Transverse Force / stroke

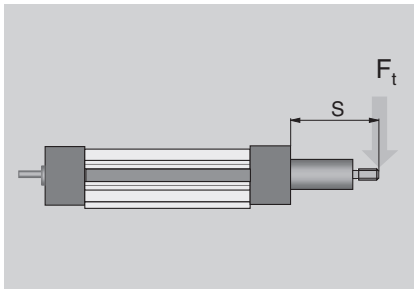


Transverse Force / Stroke

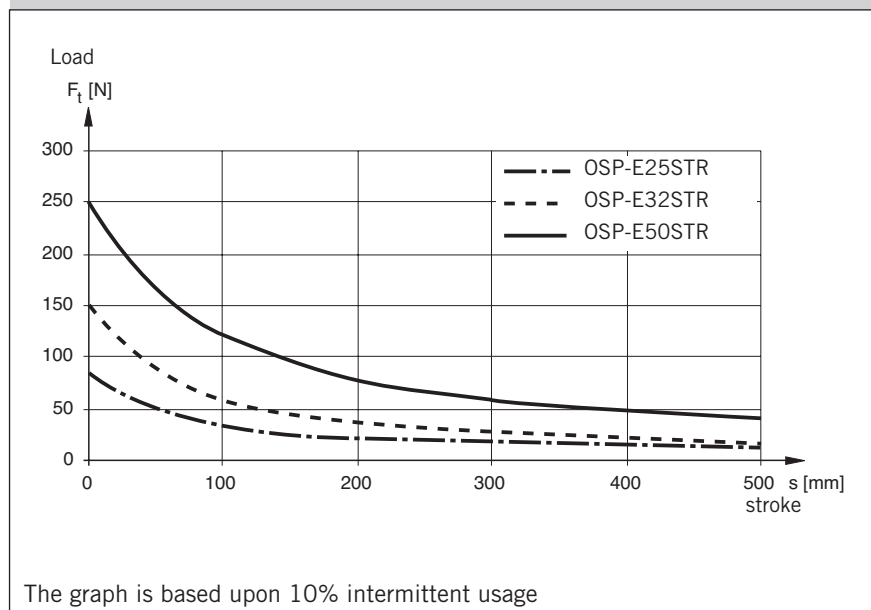


Performance / Action Force

The Linear Drives are designed for a 10% intermittent usage.
The performance to be expected depends on the maximum required actions force of the application.
An increase of the action force will lead to a reduced performance.


Performance as a function of the action force

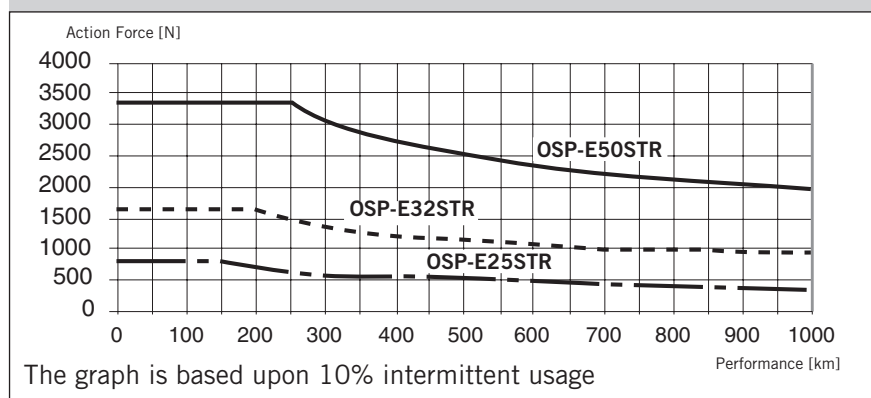

Linear Drive with Trapezoidal Screw Drive and Piston Rod – Basic Unit
Series OSP-E..STR

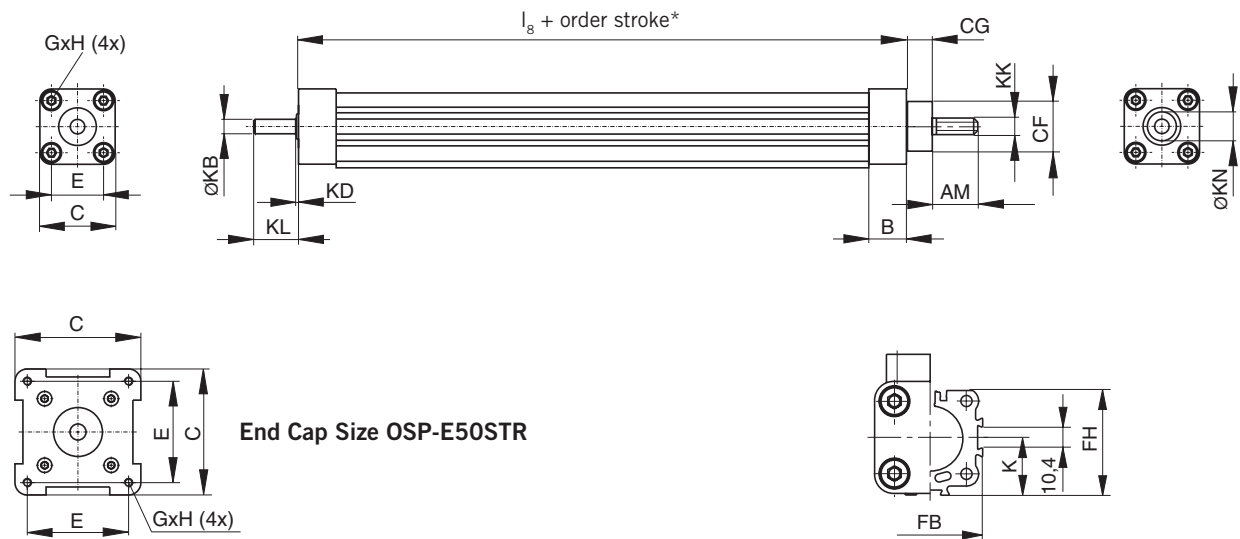

Plain shaft with keyway (Option)

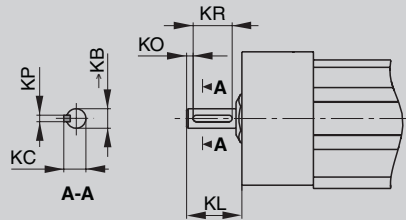

Dimension Table [mm]

Series	ØKB _{h7}	KC	KL Opt.3	Opt.4	KO	KP ^{P9}	KR
OSP-E25STR	6	6.8	17	24	2	2	12
OSP-E32STR	10	11.2	31	41	5	3	16
OSP-E50STR	15	17	43	58	6	5	28

Option 3: Keyway
Option 4: Keyway long version

*** NOTE:**

The mechanical end position must not be used as a mechanical end stop. Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 25 mm.


Order stroke = required travel + 2 x safety distance.

The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems. For further information, please contact your local HOERBIGER-ORIGA representative.

Dimension Table [mm]

Series	B	C	E	G x H	K	I ₈	AM	CF	CG	FB	FH	KB	KD	KK	KL	KN
OSP-E25STR	22	41	27	M5 x10	21.5	83	20	22	26	40	39.5	6 _{h7}	2	M10x1.25	17	13
OSP-E32STR	25.5	52	36	M6 x12	28.5	94	20	28	26	52	51.7	10 _{h7}	2	M10x1.25	31	20
OSP-E50STR	33	87	70	M6 x12	43	120	32	38	37	76	77	15 _{h7}	3	M16x1,5	43	28

Order Instructions

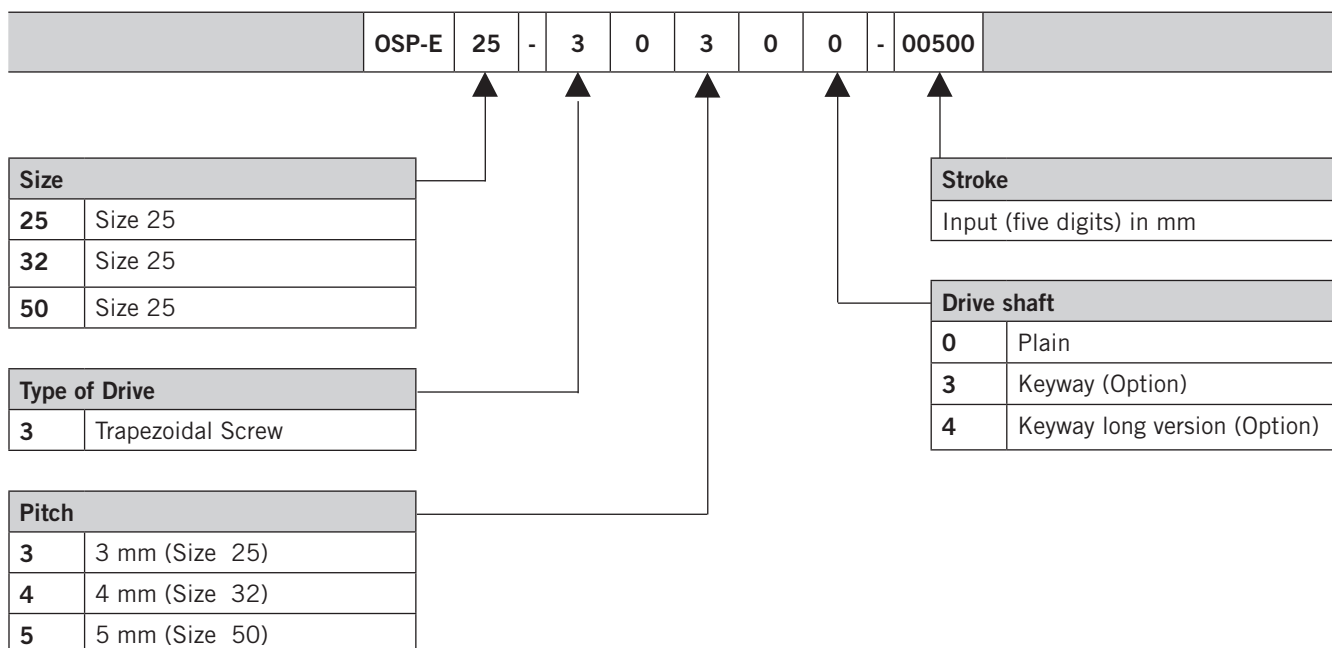

Accessories - please order separately

Description	For more informations see Data Sheet No.
Coupling Housing	1.44.006E-5
End Cap Mountings	1.44.010E-5
Mid-Section Support	1.44.010E-9
Flange Mounting C	1.44.010E-6
Trunnion Mounting	1.44.010E-13
Adaptor Profile	1.44.010E-10
T-Nut Profile	1.44.010E-11
Piston Rod Clevis according to ISO 8140	1.44.018E-2
Piston Rod Eye according to ISO 8139	1.44.018E-2
Piston Rod Compensating Coupling	1.44.018E-3
Magnetic Switches/Proximity Sensors	1.44.030E
Drive systems and components for electric linear drives OSP-E	A4P019E

Multi-Axis System for Electrical Linear Drives Series OSP-E



Contents

Description	Data Sheet No.	Page
Overview	1.38.001E	85-88
Adapter plates	1.38.002E-1 to 9	89-97
Profile Mountings	1.44.010E-5	129
Intermediate Drive Shafts	1.38.004E	101

MULTI-AXIS CONNECTION SYSTEM – SIMPLIFIES ENGINEERING AND INSTALLATION

A completely new system for easy connection of OSP-E linear drives in multi-axis systems.

MULTI-AXIS CONNECTIONS


With this highly adaptable system for connection of linear drives in multi-axis arrangements, HOERBIGER-ORIGA offers design engineers complete flexibility. A wide range of adapter plates, profile mountings and intermediate drive shafts simplify engineering and installation.

The connection system enables actuators to be mounted in carrier to carrier, carrier to profile, carrier to end cap mounting, carrier to end cap.

Developed for the heavy-duty toothed belt drive series OSP-E..BHD, the system provides cross-connection with the same series and also other linear drive series in the ORIGA SYSTEM PLUS range.



MULTI-AXIS CONNECTION SYSTEM

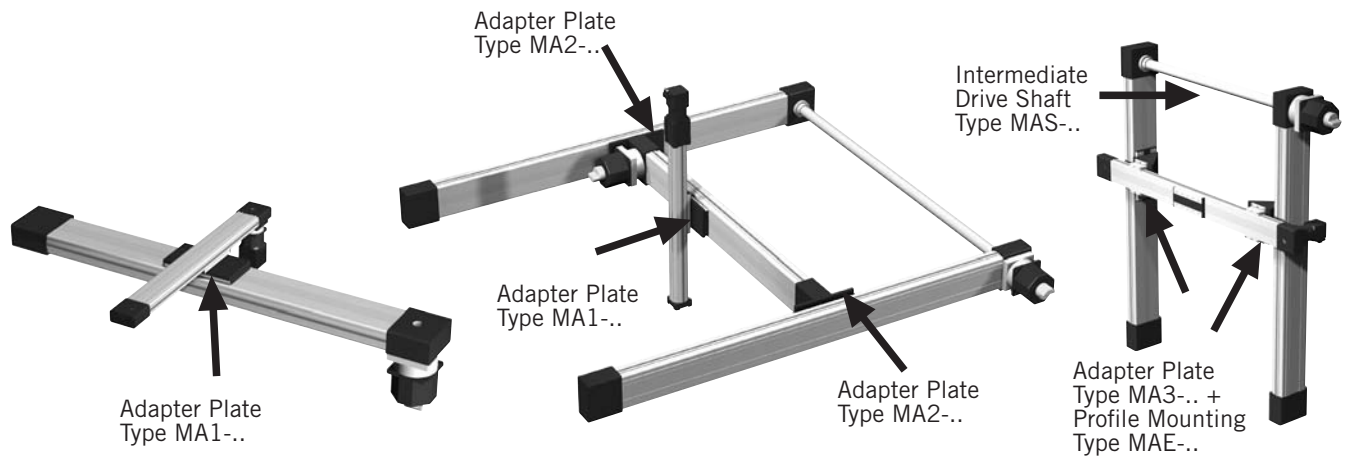


* For available standard combinations, see data sheet 1.38.001E-4

Adapter Plate Type MA1-..* For connecting carrier to carrier, carrier to profile mounting or carrier to end cap mounting. 	Combination C* 	Combination P* 	Combination EM*
	Combination C* 	Combination P* 	Combination EM*
Adapter Plate Type MA2-..* For connecting carrier to end cap. 	Combination E* 	Combination E* 	Combination E*
	Combination E* 	Combination E* 	Combination E*
Adapter Plate Type MA3-..* For connecting 90° carrier to profile mounting or carrier to end cap mounting. 	Combination P* 	Combination P* 	
	Combination EM* 	Combination EM* 	
Profile Mounting Type MAE-.. 			
Intermediate Drive Shaft Type MAS-.. 			


AVAILABLE MOUNTING COMBINATIONS

Available Mounting Combinations


Combination C*




Combination P



Combination E*



Combination EM*



Illustrations just show OSP-E..BHD examples

Series																											
	25BHD				32BHD				50BHD				25BV	25B/SB/ST				32B/SB/ST				50B/SB/ST					
	Type	C ¹	P ²	E ³	EM ⁴	C ⁵	P ⁶	E ⁷	EM ⁸	C ⁹	P ¹⁰	E ¹¹	EM ¹²	E ¹¹	C ¹³	P ¹⁴	E ¹⁵	EM ¹⁶	C ¹⁷	P ¹⁸	E ¹⁹	EM ²⁰	C ²¹	P ²²	E ²³	EM ²⁴	
OSP-E25BHD	MA1-25	X	X		X	X	X		X						X	X		X	X	X	X		X	X	X		X
OSP-E32BHD	MA1-32	X	X		X	X	X		X	X	X		X							X	X		X	X	X		X
OSP-E50BHD	MA1-50	X	X		X	X	X		X	X	X		X							X				X	X		X
OSP-E25BHD	MA2-25			X				X																		X	
	MA2-32													X													
OSP-E32BHD	MA2-32			X				X				X		X												X	
OSP-E50BHD	MA2-50			X				X				X		X												X	
OSP-E25BHD	MA3-25		X		X		X		X							X		X		X		X		X		X	
OSP-E32BHD	MA3-32		X		X		X		X		X		X							X		X		X		X	
OSP-E50BHD	MA3-50		X		X		X		X		X		X												X		X

Abbreviations:

C = MAn to Carrier,
P = MAn to Profile mounting,
E = MAn to End cap,
EM = MAn to End cap mounting (n=1,2,3)

* For type OSP-E..SBR / ..STR only combination P is available.

Values in superscript refer to corresponding adapter plate dimensions on data sheets 1.38.002E-1 to 1.38.002E-9.

e.g. Dimensions corresponding to combination option „C“ for adapter plate MA1-50 connected to an OSP-E32BHD carrier are shown with Superscript number 5 on the MA1-50 adapter plate data sheet 1.38.002E-3

Other combinations on request.


A3P154E001Z50X

The right to introduce technical modifications is reserved

For **Linear Drives** see 1.15.002E, 1.20.002E, 1.20.016E, 1.30.002E, 1.35.002E, 1.35.011E, 1.35.021E

A1P559E00FAG0X

The right to introduce technical modifications is reserved

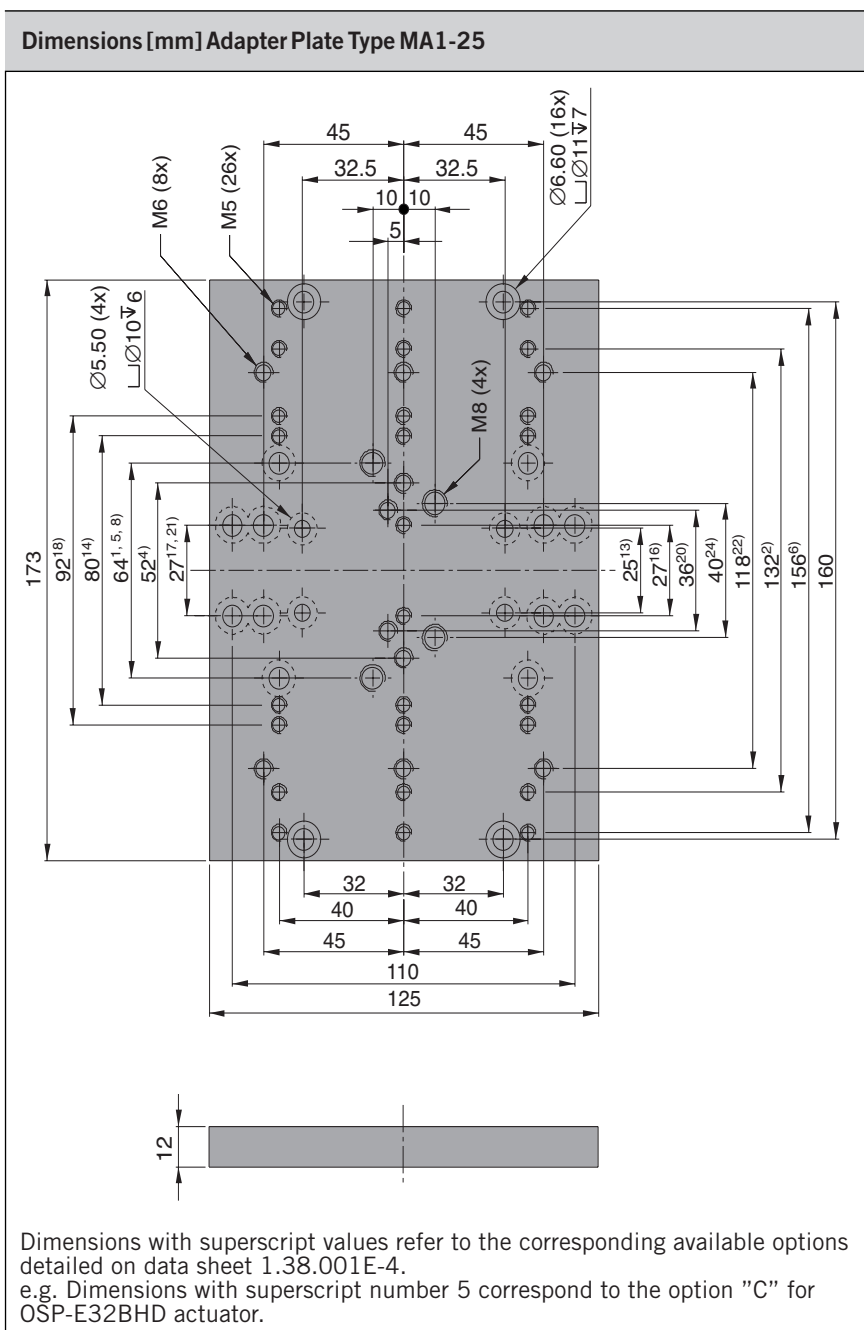

Adapter Plate for OSP-E25



Type: MA1-25


Order Instructions and Weight		
Description	Weight(mass) [kg]	Order -No.
Adapter Plate Type MA1-25	0.7	12269
For Linear Drives see 1.15.002E, 1.20.002E, 1.20.016E, 1.30.002E, 1.35.002E, 1.35.011E, 1.35.021E		



Adapter Plate for OSP-E32



Type: MA1-32

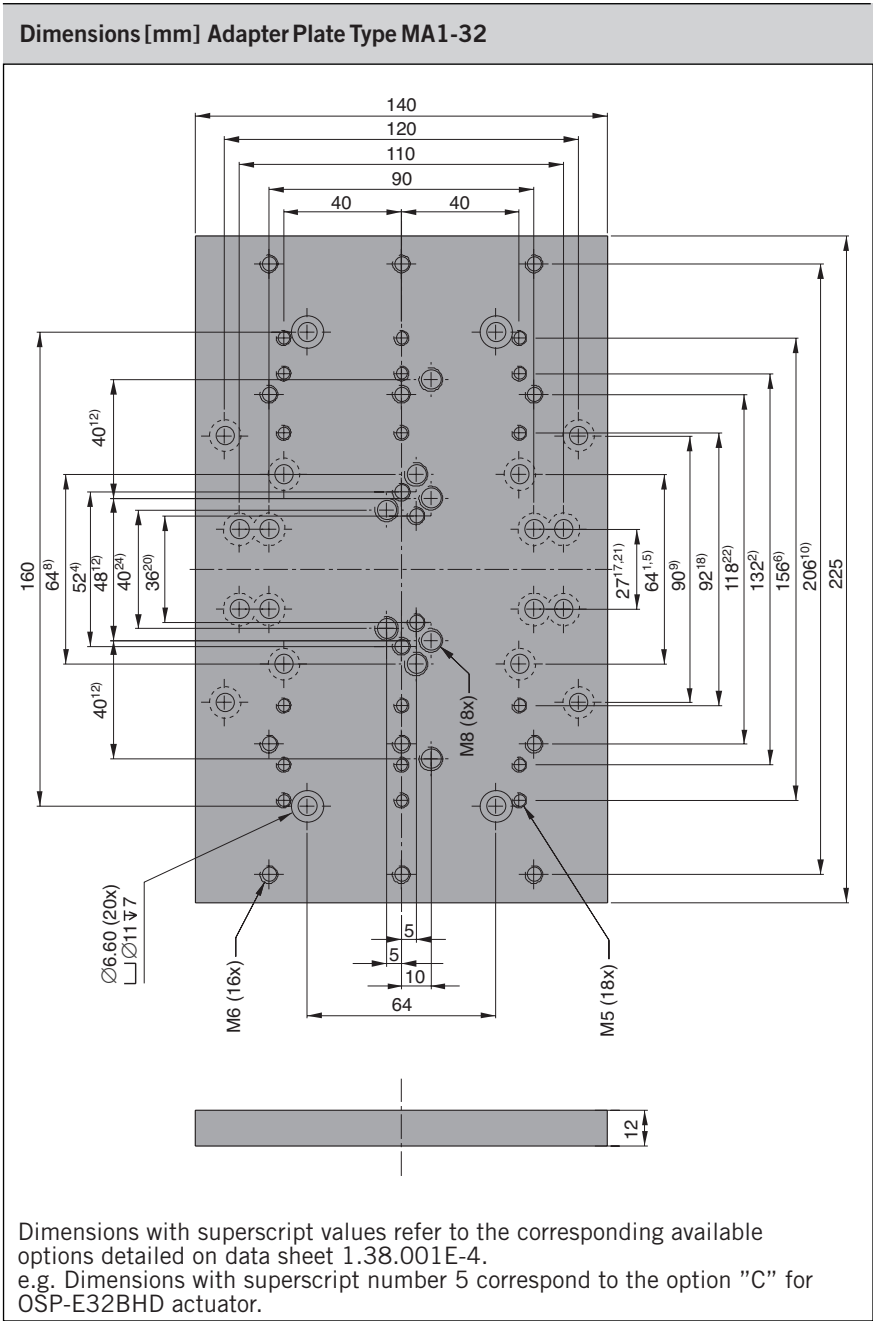


Order Instructions and Weight		
Description	Weight (mass) [kg]	Order No.
Adapter Plate Type MA1-32	1.0	12272

For Linear Drives see		
1.15.002E, 1.20.002E, 1.20.016E, 1.30.002E, 1.35.002E, 1.35.011E, 1.35.021E		



Dimensions [mm Adapter Plate Type MA1-50

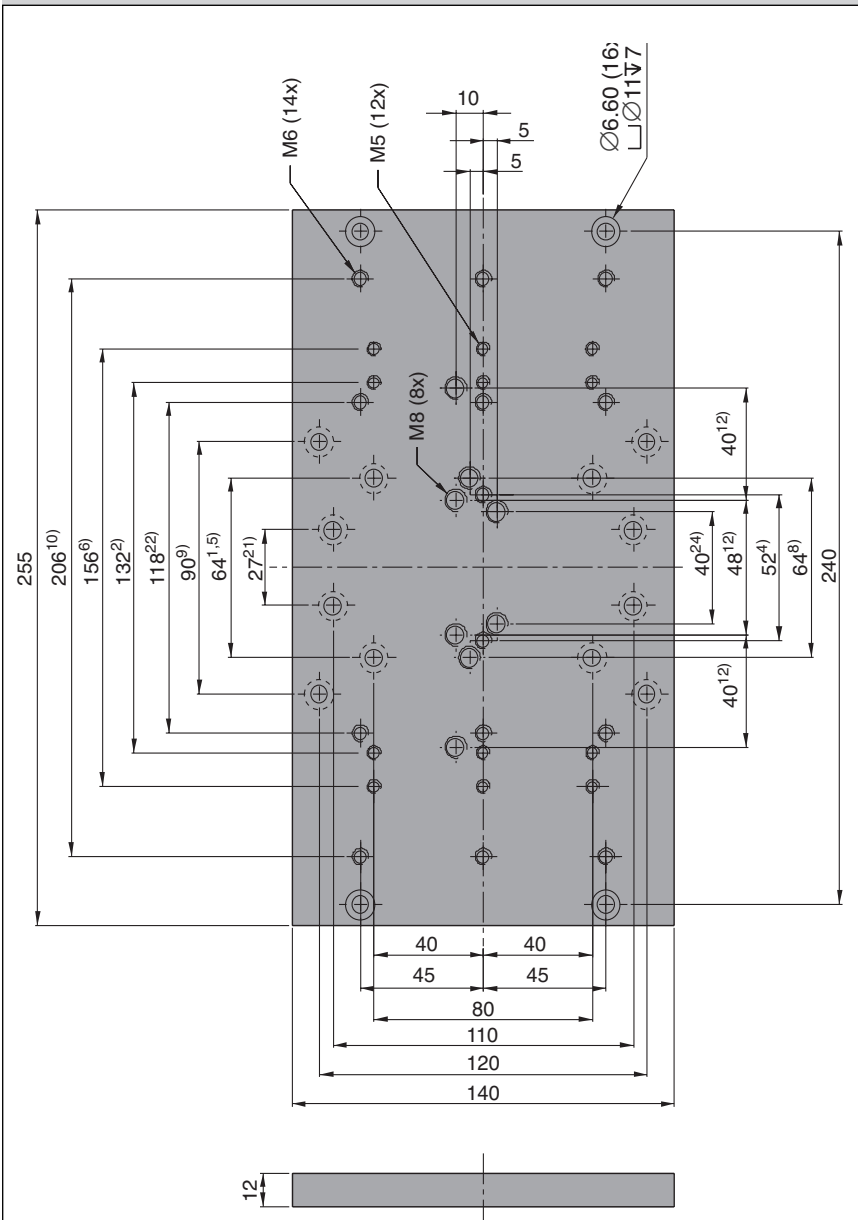

Dimensions with superscript values refer to the corresponding available options detailed on data sheet 1.38.001E-4.
e.g. Dimensions with superscript number 5 correspond to the option "C" for OSP-E32BHD actuator.

Adapter Plate for OSP-E50



Type: MA1-50

Order Instructions and Weight

Description	Weight (mass) [kg]	Order No.
Adapter Plate Type MA1-50	1.1	12275


For **Linear Drives** see 1.15.002E, 1.20.002E, 1.20.016E, 1.30.002E, 1.35.002E, 1.35.011E, 1.35.021E



Adapter Plate for OSP-E25



Type: MA2-25

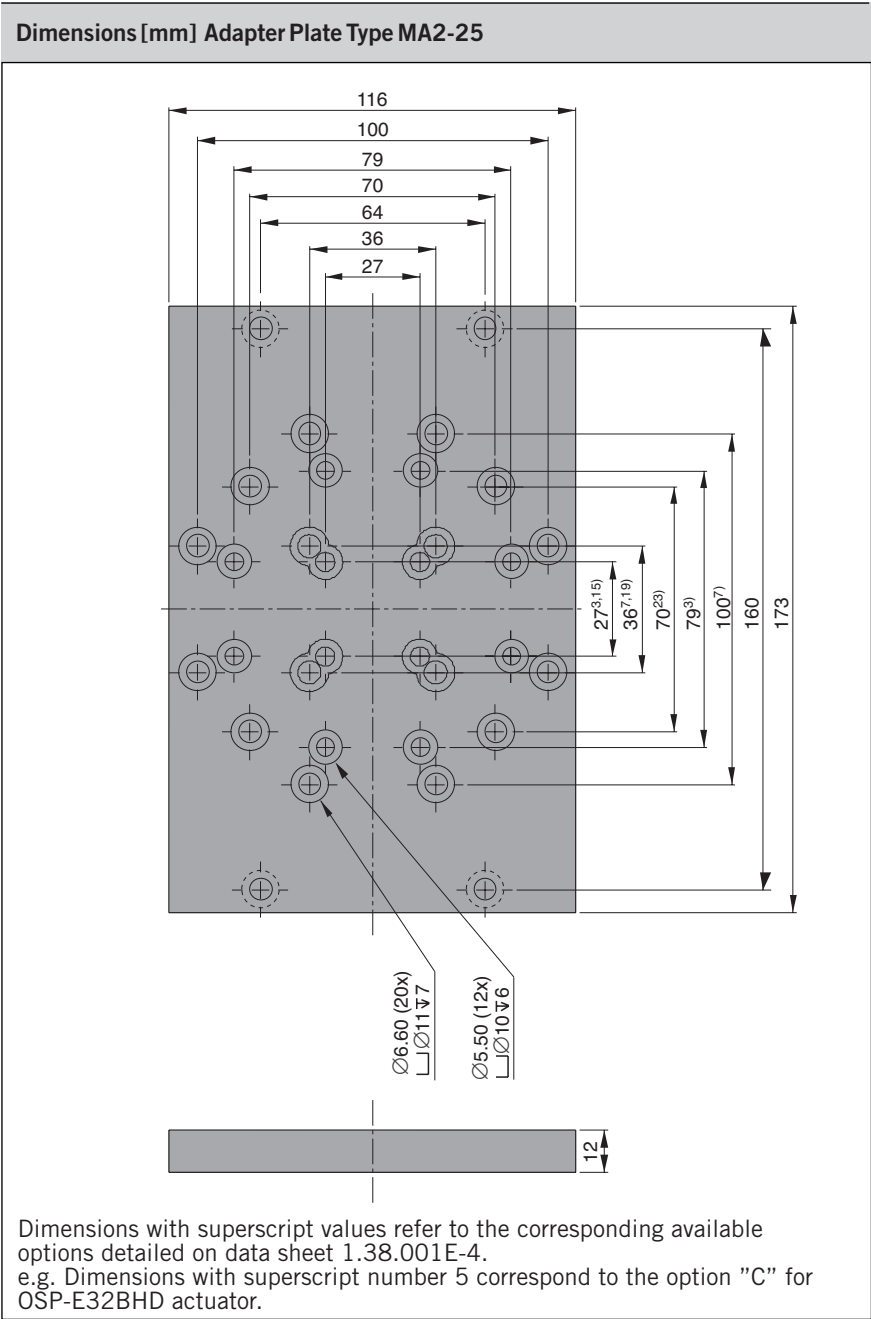


Order Instructions and Weight		
Description	Weight (mass) [kg]	Order No.
Adapter Plate Type MA2-25	0.6	12270

For Linear Drives see	1.15.002E, 1.20.002E, 1.20.016E, 1.30.002E, 1.35.002E, 1.35.011E, 1.35.021E
------------------------------	---



Dimensions [mm] Adapter Plate Type MA2-32

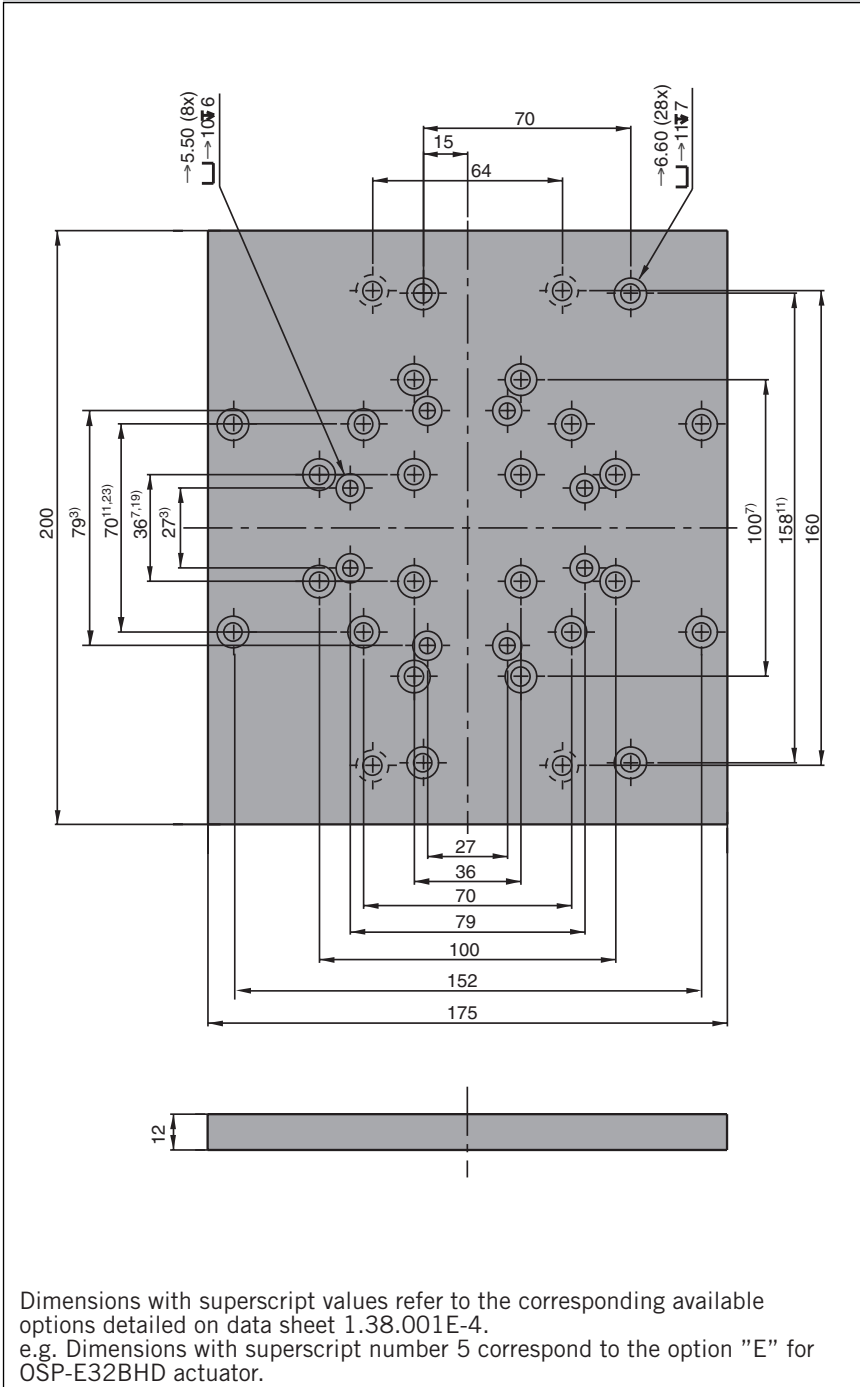

Adapter Plate for OSP-E32



Type: MA2-32


Order Instructions and Weight		
Description	Weight (mass) [kg]	Order No.
Adapter Plate Type MA2-32	1.1	12273
For Linear Drives see 1.15.002E, 1.20.002E, 1.20.016E, 1.30.002E, 1.35.002E, 1.35.011E, 1.35.021E		



Adapter Plate for OSP-E50




Type: MA2-50

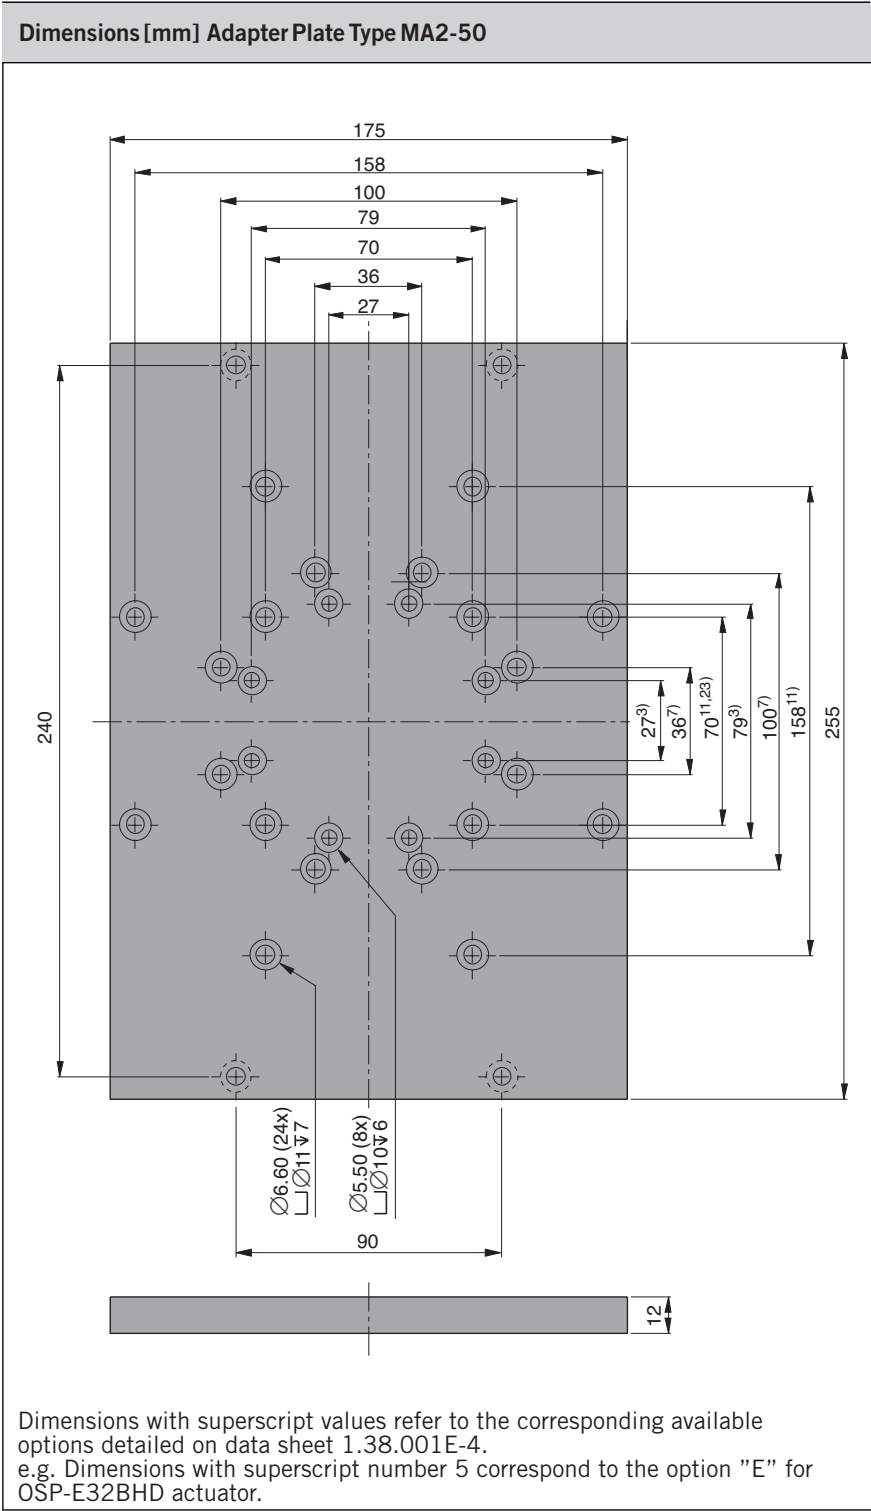

Order Instructions and Weight		
Description	Weight (mass) [kg]	Order No.
Adapter Plate Type MA2-50	1.4	12276
For Linear Drives see 1.15.002E, 1.20.002E, 1.20.016E, 1.30.002E, 1.35.002E, 1.35.011E, 1.35.021E		

Dimensions [mm] Adapter Plate Type MA3-25

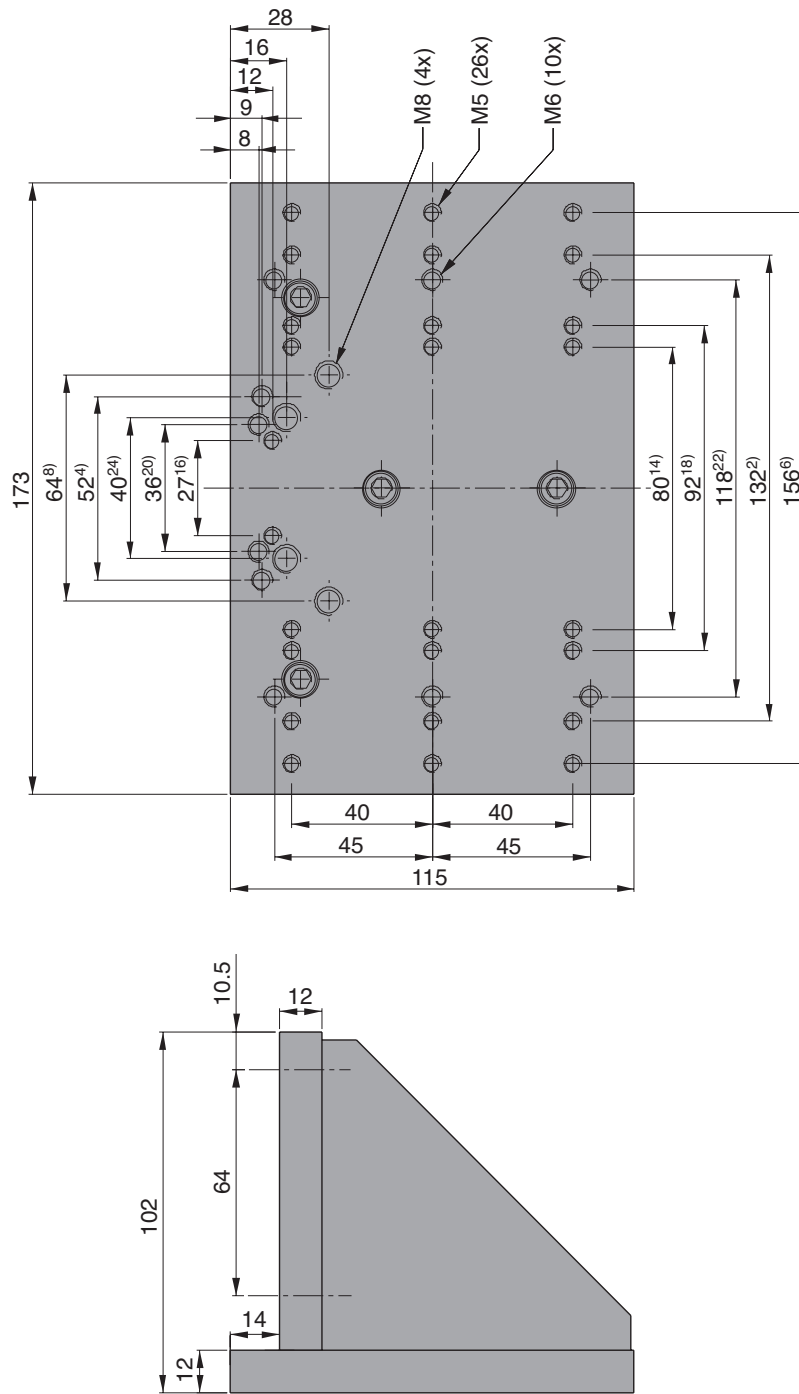

Dimensions with superscript values refer to the corresponding available options detailed on data sheet 1.38.001E-4.
e.g. Dimensions with superscript number 5 correspond to the option "EM" for OSP-E32BHD actuator.

Order Instructions and Weight


Description	Weight(mass) [kg]	Order No.
Adapter Plate Type MA3-25	1.3	12271

For **Linear Drives** see 1.15.002E, 1.20.002E, 1.20.016E, 1.30.002E, 1.35.002E, 1.35.011E, 1.35.021E

Adapter Plate for OSP-E25





Type: MA3-25

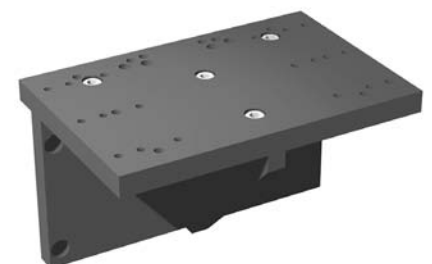

Adapter Plate for OSP-E32




Type: MA3-32

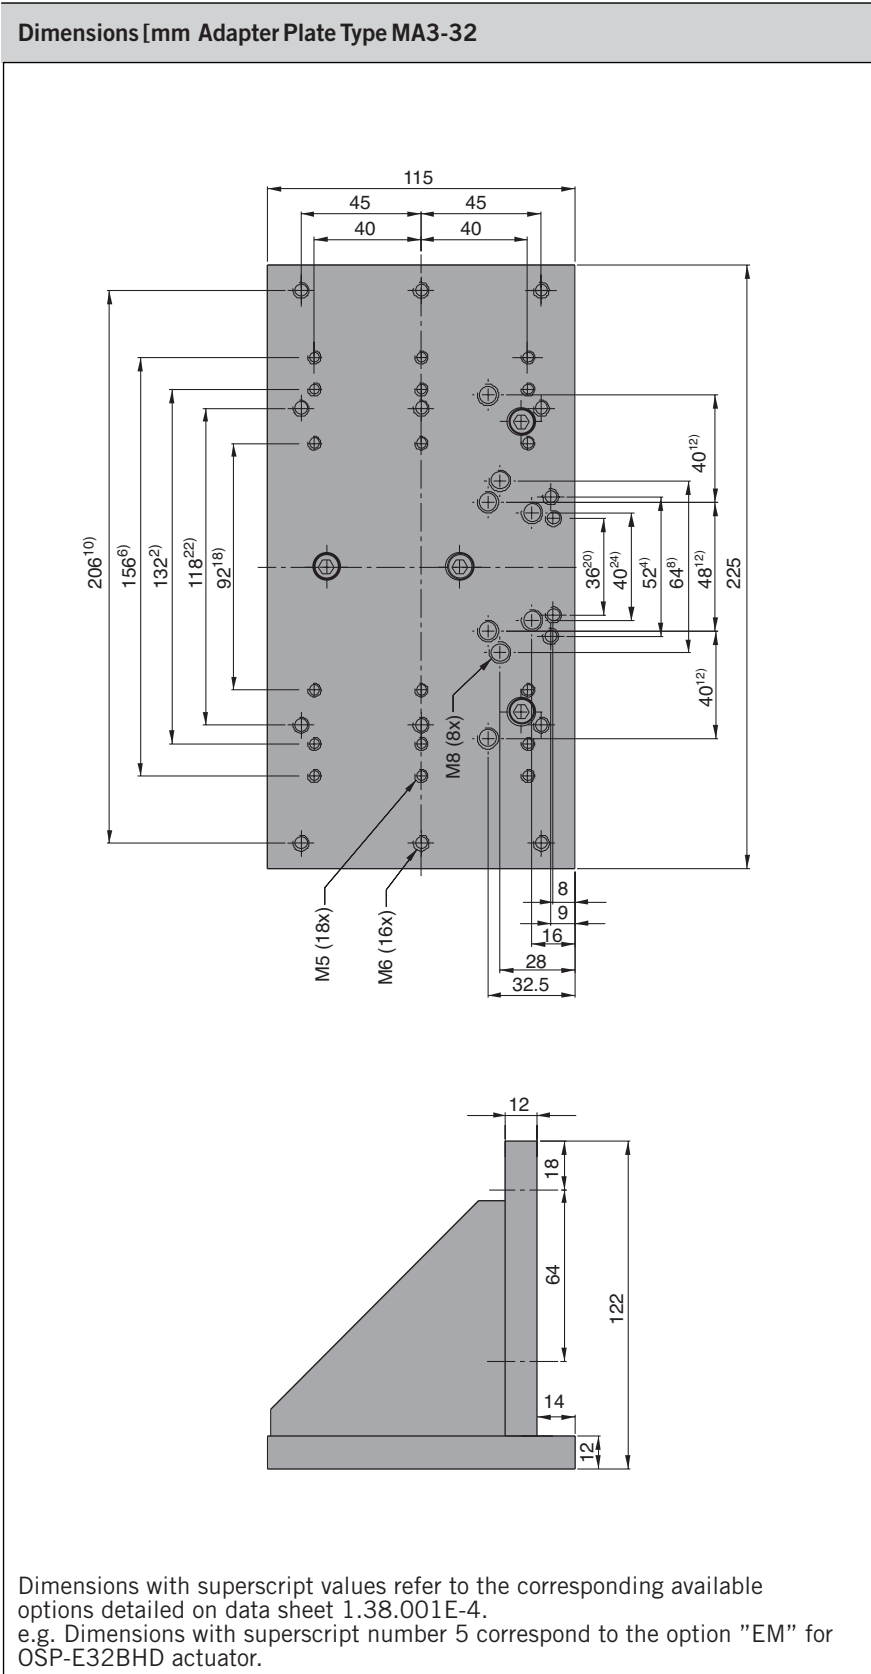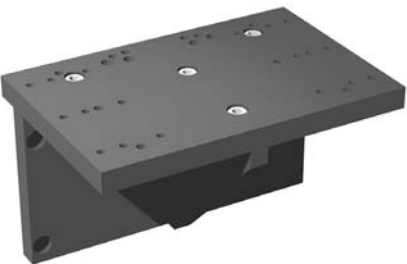

Order Instructions and Weight		
Description	Weight (mass) [kg]	Order No.
Adapter Plate Type MA3-32	1.8	12274

For Linear Drives see	1.15.002E, 1.20.002E, 1.20.016E, 1.30.002E, 1.35.002E, 1.35.011E, 1.35.021E
------------------------------	---

Dimensions [mm] Adapter Plate Type MA3-50

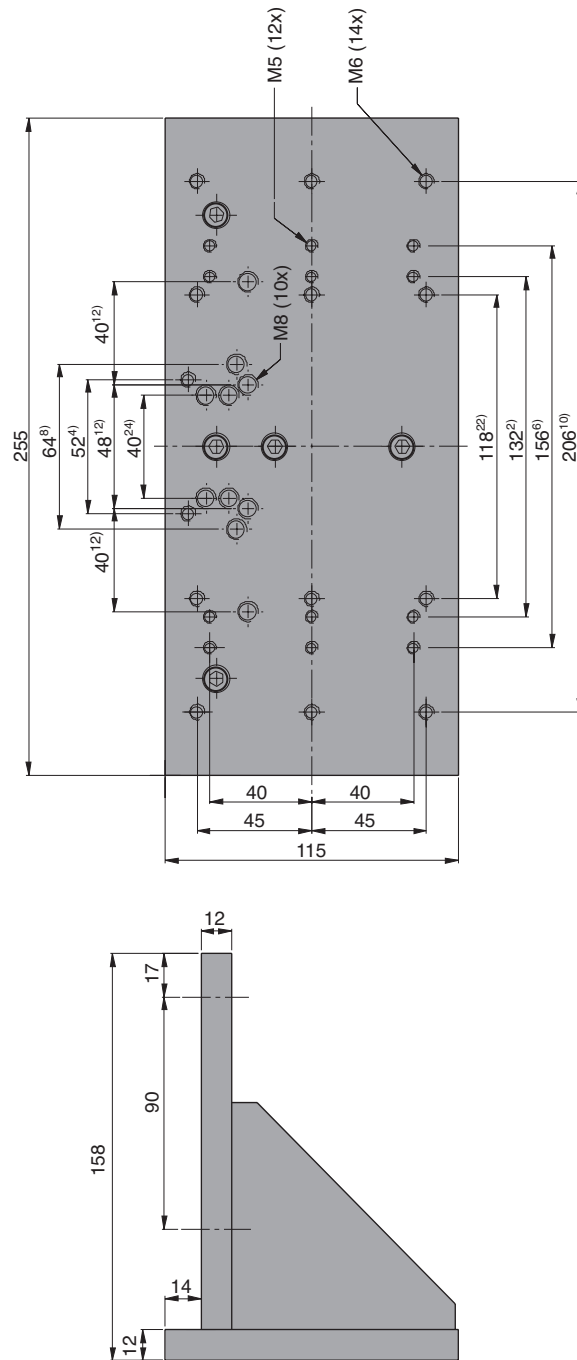

Dimensions with superscript values refer to the corresponding available options detailed on data sheet 1.38.001E-4.
e.g. Dimensions with superscript number 4 correspond to the option "EM" for OSP-E25BHD actuator.

Order Instructions and Weight


Description	Weight (mass) [kg]	Order No.
Adapter Plate Type MA3-50	2.3	12277

For **Linear Drives** see 1.15.002E, 1.20.002E, 1.20.016E, 1.30.002E, 1.35.002E, 1.35.011E, 1.35.021E


Adapter Plate for OSP-E50




Type: MA3-50

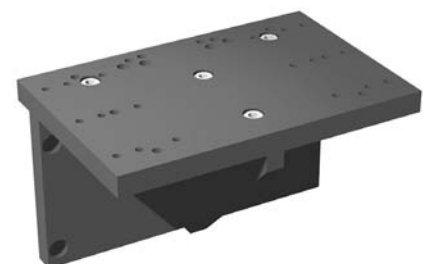


Intermediate Drive Shaft with Clamp Shaft Series OSP-E20BHD to E50BHD, Type MAS-..

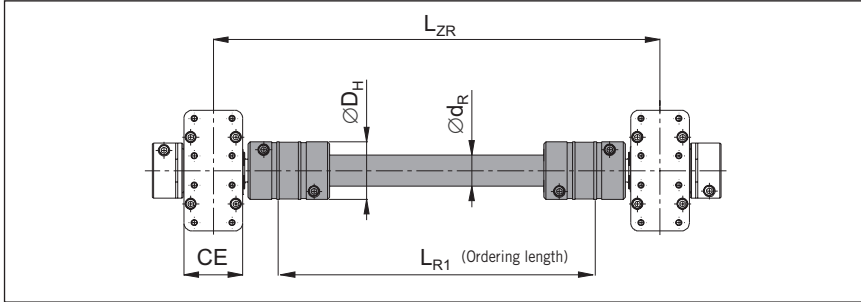

Intermediate Drive Shaft with Plain Shaft and Keyway Series OSP-E20BHD to E50BHD, Type MAS-..

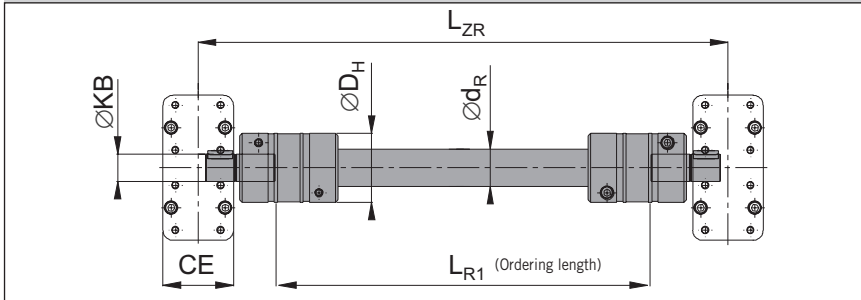

Critical Speed v. for Coupling Length

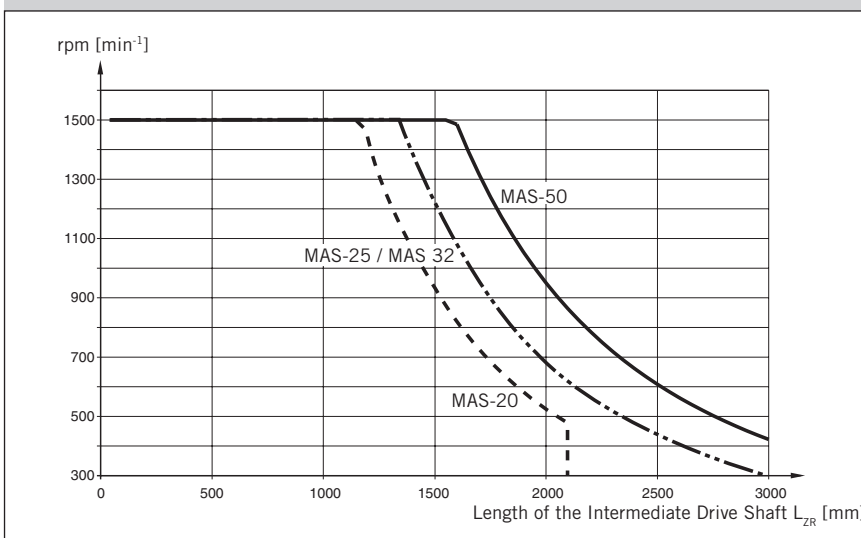

Characteristics / Dimension Table [mm] and Order No.

Series	Type	Max. Torque- [Nm] **	CE	D _H	KB***	L _{ZR}	L _{R1}	d _R	Order No. *	
									For Clamp Shaft	For Hollow Shaft
OSP-E20BHD	MAS-20	28	38	40	12 _{k6}	<2100	L _{ZR} -98	20 x 3.0	16256-...	16257-...
OSP-E25BHD	MAS-25	39	42	55	16 _{k6}	<3000	L _{ZR} -112	25 x 2.5	12305-...	12281-...
OSP-E32BHD	MAS-32	42	56	55	22 _{k6}	<3000	L _{ZR} -126	25 x 2.5	12306-...	12282-...
OSP-E50BHD	MAS-50	102	87	65	32 _{k6}	<3000	L _{ZR} -167	35 x 4.0	12307-...	12283-...

* Complete with L_{R1}. Length in mm.
Example: 12305- 1200
(Length L_{R1} = 1200 mm)

** For higher torque requirement, please
contact your local HOERBIGER-ORIGA
technical support

*** Other dimensions for KB on request.

Multi-Axis- System Accessories Complete Intermediate Drive Shaft

Size 25, 32, 50

OSP
— ORIGA
— SYSTEM
— PLUS

for Linear drive
• Series OSP-E..BHD

Note:
For Series OSP-E..BHD with inte-
grated gearbox, please contact your
local HOERBIGER-ORIGA technical
support.


For other series on request.

Features:

- Backlash-free shaft connection under pre-stress
- Design up to speed 1500 rpm
- Intermediate Drive Shaft with double coupling for larger displacements of parallel linear drives
- Easy to mount

Material:


Aluminium (AL-H) / Steel (St-H)
Polyurethane/Hytrel

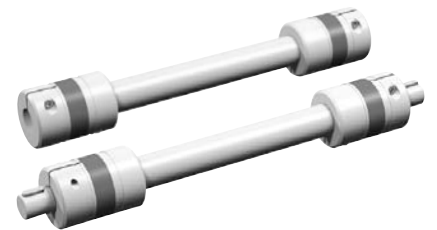

For Linear Drives see 1.15.002E

ORIGA

Linear Guides Series OSP-E

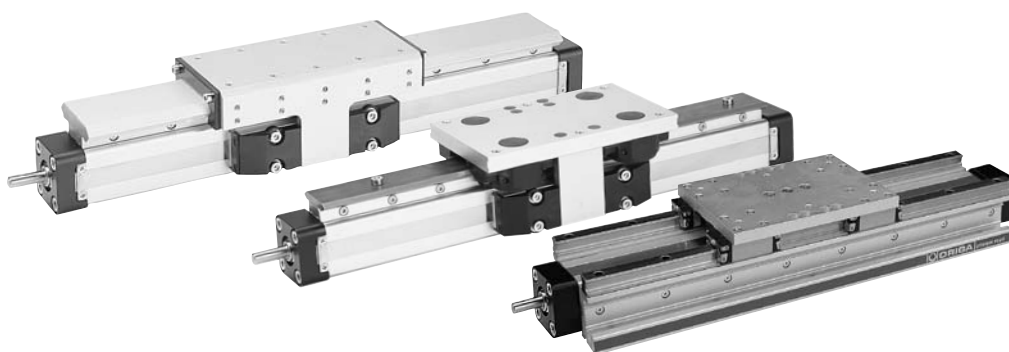

Contents

	Description	Data Sheet No.	Page
	Overview	1.40.020E	101-102
	Plain Bearing SLIDELINE	1.40.021E	103-104
	Roller Guide POWERSLIDE	1.40.022E	105-108
	Aluminium Roller Guide PROLINE	1.40.024E	109-111
NEW	Heavy-duty guide HD	1.40.025E	113-115

Adaptive modular system

The Origa system plus – OSP – provides a comprehensive range of linear guides for the pneumatic and electric linear drives.

Versions:

Electric linear drive

Series:

- **OSP-E..B**
- **OSP-E..SB**
- **OSP-E..ST**

• Sizes:

25 - 32 - 50

Advantages:

- takes high loads and moments
- high precision
- smooth operation
- can be retrofitted
- can be installed in any position

Linear Guides

Electric linear drive

- **Series OSP-E..B** (Toothed Belt Driven)
- **Series OSP-E..SB** (Ball Screw Driven)
- **Series OSP-E..ST** (Trapezoidal Screw Driven)



SLIDELINE

The cost-effective plain bearing guide for medium loads.

- for spindle drives only
- Series OSP-E..SB, OSP-E..ST

See data sheet 1.40.021E



POWERSLIDE

The roller guide for heavy loads.


See data sheet 1.40.022E



PROLINE

The ball bushing guide for heavy loads and speed.

See data sheet 1.40.024E

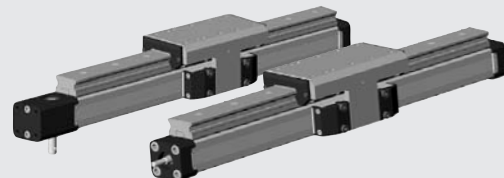


HD-Guide (heavy-duty guide)

The recirculating ball bearing guide for the heaviest loads and greatest accuracy.


- for Screw Drives only
- Series OSP-E..SB, OSP-E..ST

See data sheet 1.40.025E

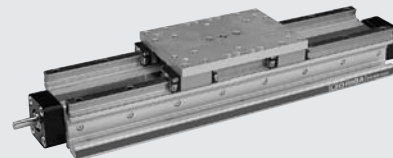

Versions

– for electric linear drive:
Series OSP-E Screw

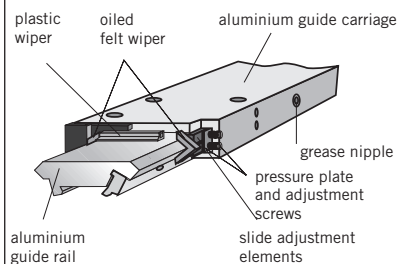


Technical Data

The table shows the maximum permissible values for smooth operation, which must not be exceeded even under dynamic conditions.

The load and moment figures apply to speeds $v < 0.2$ m/s.

Loads, forces and moments

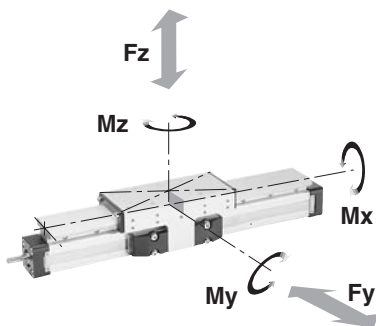

Series	Max. Moments [Nm]			Max. Load [N] F	Mass of Drive with guide [kg]		Masse of guide carriage [kg]	Ident-Nr. SLIDELINE ¹⁾ without brake for OSP-E Screw
	Mx	My	Mz		with 0 mm stroke OSP-E Screw	increase per 100 mm stroke OSP-E Screw		
SL 25	14	34	34	675	1.8	0.42	0.61	20342
SL 32	29	60	60	925	3.6	0.73	0.95	20196
SL 50	77	180	180	2000	8.7	1.44	2.06	20195

¹⁾ Corrosion resistant fixtures available on request

Plain Bearing Guide SLIDELINE

OSP
— ORIGA
— SYSTEM
— PLUS

Series SL 25 to 50
for Linear Drive
• Series OSP-E Screw

Features:



- anodised aluminium guide rail with prism-shaped slideway arrangement
- adjustable plastic slide elements
- composite sealing system with plastic and felt wiper elements to remove dirt and lubricate the slideways.
- corrosion-resistant version available on request

For further technical data see also linear drive OSP-E (1.30.002E, 1.35.002E).

Linear Drive see 1.20.002E, 1.25.002E, 1.30.002E, 1.35.002E
Mountings see 1.44.014E

Dimensions

Series OSP-E Screw

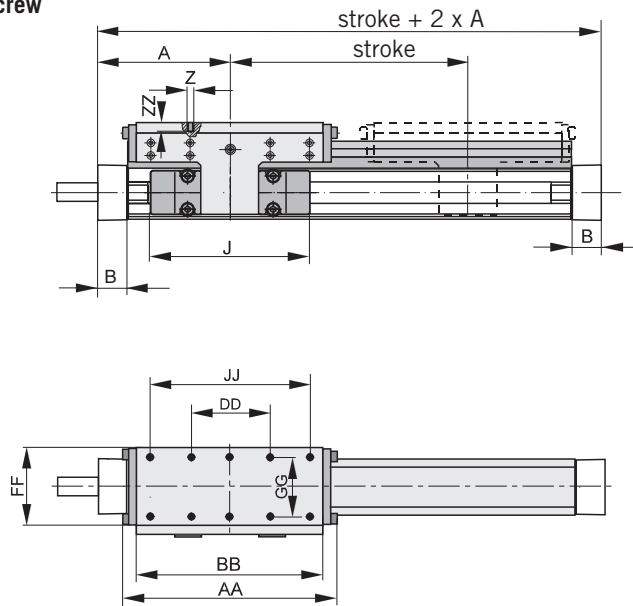

For further mounting elements and options see accessories..
For further information and technical data see data sheets for linear drives OSP-E (1.30.002, 1.35.002)


Dimension Table [mm]

Series	A	B	J	M	Z	AA	BB	DD	CF	EC	ED	EE	EG	EW	FF	FT	FS	GG	JJ	ZZ
SL 25	100	22	117	40.5	M6	162	142	60	72.5	47	12	53	39	30	64	73.5	20	50	120	12
SL 32	125	25.5	152	49	M6	205	185	80	91	67	14	62	48	33	84	88	21	64	160	12
SL 50	175	33	200	62	M6	284	264	120	117	94	14	75	56	39	110	118.5	26	90	240	16


Mid-Section Support

(for versions see 1.44.014E-4)



Mid-section supports are required from a certain stroke length to prevent excessive deflection and vibration of the linear drive. The diagrams show the maximum permissible unsupported length in relation to loading.

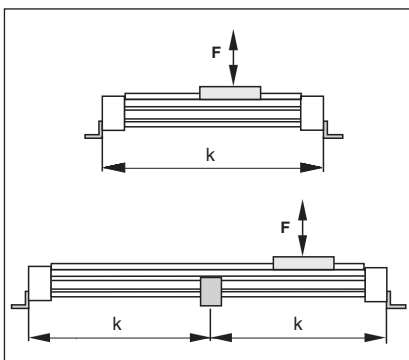

Load case 1
Top carrier




Load case 2
Side carrier

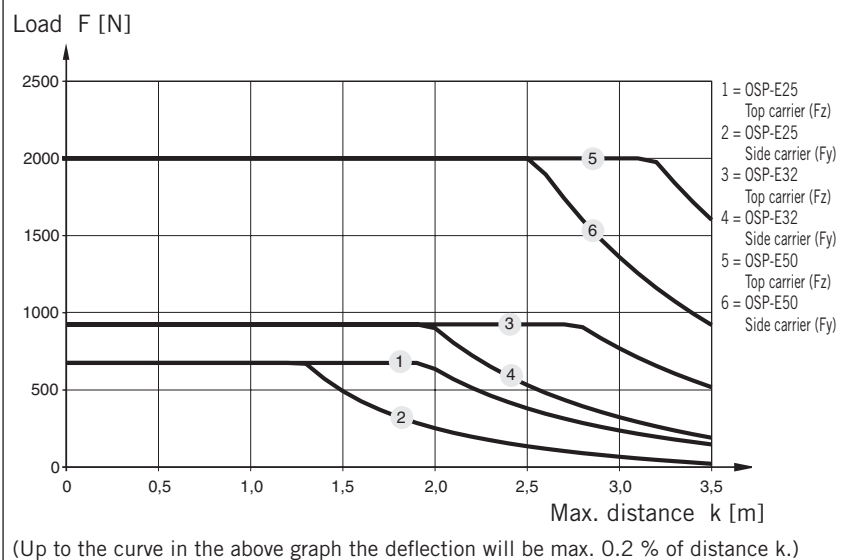

Versions

– for electric linear drive:
Series OSP-E Belt
Series OSP-E Screw

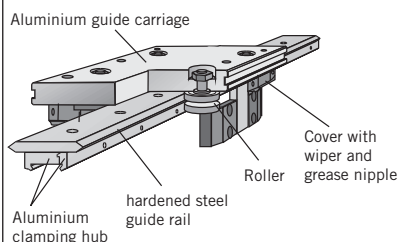

Roller Guide- POWERSLIDE

OSP
— ORIGA
— SYSTEM
— PLUS

**Series PS 25 to 50
for Linear Drive**

- Series OSP-E Belt *
- Series OSP-E Screw

Technical Data

The Table shows the maximum permissible values for smooth operation, which must not be exceeded even under dynamic conditions.

For further information and technical data see data sheets for linear drives OSP-E Belt (1.20.002E, 1.25.002E) and OSP-E Ball Screw (1.30.002E, 1.35.002E)

Features:


- anodised aluminium guide carriage with vee rollers having 2 rows of ball bearings
- hardened steel guide rail
- several guide sizes can be used on the same drive
- max. speed $v = 3$ m/s
- tough roller cover with wiper and grease nipple
- any length of stroke up to 3500 mm (longer strokes on request).
The maximum stroke lengths of drives OSP-E..B, OSP-E..SB and OSP-E..ST must be observed.

OSP-E Belt:

For position of guides see page 1.40.022E -2

* Series PS for OSP-E Bi-parting version on request

Loads, forces and moments

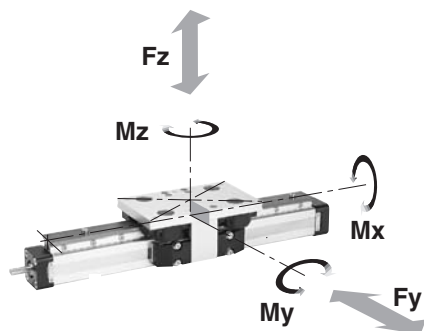

Example: PS 25/35


width of
guide rail
(35 mm)

Size of drive
(OSP-E25)

Series	Max. Moments [Nm]			Max. Load [N] Fy, Fz	Mass of drive with guide [kg] with 0 mm stroke		increase per 100 mm stroke		Mass * of guide carriage [kg]	Order No. Powerslide for	
	Mx	My	Mz		OSP-E Belt	OSP-E Screw	OSP-E Belt	OSP-E Screw		OSP-E* Belt	OSP-E Screw
PS 25/25	14	63	63	910	1.9	1.8	0.30	0.37	0.7	20304	20015
PS 25/35	17	70	70	1010	2.1	1.9	0.34	0.41	0.8	20305	20016
PS 25/44	20	175	175	1190	3.0	2.7	0.42	0.49	1.5	20306	20017
PS 32/35	20	70	70	1400	3.1	3.2	0.51	0.63	0.8	20307	20286
PS 32/44	50	175	175	2300	4.0	4.1	0.59	0.70	1.5	20308	20287
PS 50/60	90	250	250	3000	8.8	8.7	1.04	1.36	2.3	20309	20288
PS 50/76	140	350	350	4000	12.2	12.0	1.28	1.6	4.9	20310	20289

For **Linear drives** see **data sheet** 1.20.002E, 1.25.002E, 1.30.002E, 1.35.002E
For **Mountings** see **data sheet** 1.44.014E


Dimensions – Series OSP-E Belt

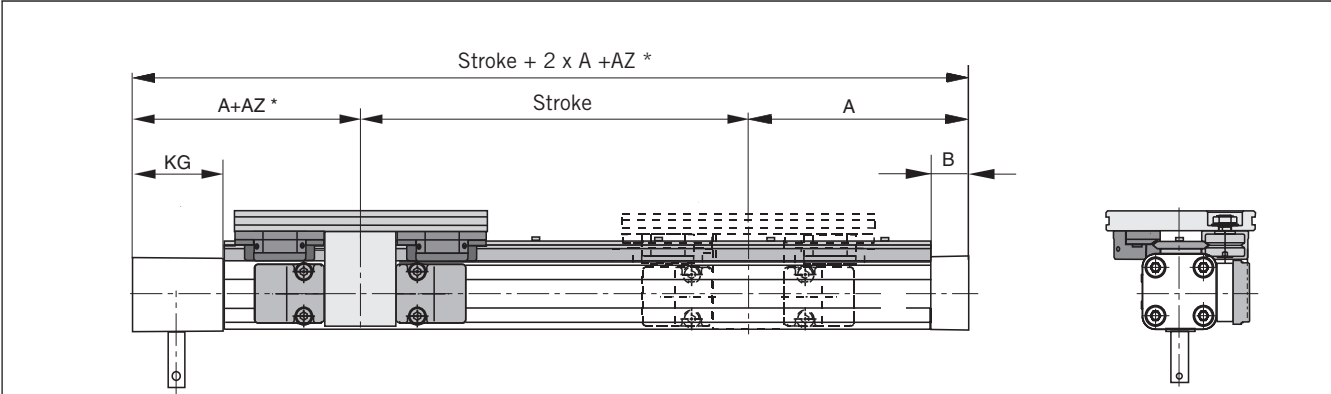

* **Please note**
The dimension „AZ“ must be added to „A“. Stroke length to order is stroke + dimension „AZ“ + safety clearance (see Data Sheet 1.20.002-6, 1.25.002-6)
Please also note the effect of dimension „AZ“ when retrofitting a guide – contact your local HOERBIGER-ORIGA technical support department.

* **Please note**
The dimension „AZ“ must be added to „A“. Stroke length to order is stroke + dimension „AZ“ + safety clearance (see Data Sheet 1.20.002-6, 1.25.002-6)
Please also note the effect of dimension „AZ“ when retrofitting a guide – contact your local HOERBIGER-ORIGA technical support department.

Dimensions – Series OSP-E Screw

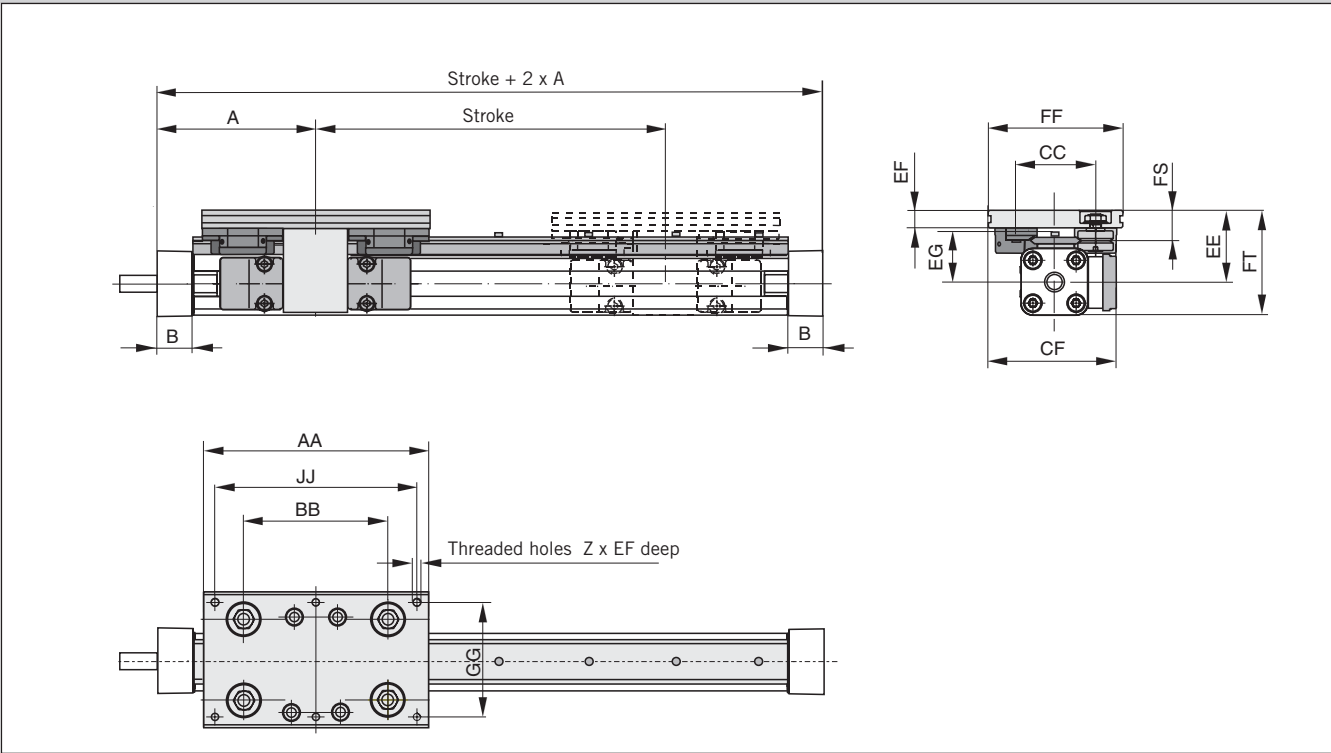

Dimension Table [mm]

Series	A		B		Z	AA	AZ	BB	CC	CF	EE	EF	EG	FF	FS	FT	GG	JJ	KG
	OSP-E Belt	OSP-E Screw	OSP-E Belt	OSP-E Screw															
PS 25/25	125	100	22	22	6xM6	145	5	90	47	79.5	53	11	39	80	20	73,5	64	125	57
PS 25/35	125	100	22	22	6xM6	156	10	100	57	89.5	52.5	12.5	37.5	95	21.5	73	80	140	57
PS 25/44	125	100	22	22	6xM8	190	27	118	73	100	58	15	39	116	26	78.5	96	164	57
PS 32/35	150	125	25	25.5	6xM6	156	–	100	57	95.5	58.5	12.5	43.5	95	21.5	84.5	80	140	61
PS 32/44	150	125	25	25.5	6xM8	190	6	118	73	107	64	15	45	116	26	90	96	164	61
PS 50/60	200	175	25	33	6xM8	240	5	167	89	130.5	81	17	61	135	28.5	123.5	115	216	85
PS 50/76	200	175	25	33	6xM10	280	25	178	119	155.5	93	20	64	185	39	135.5	160	250	85


OSP-E Belt – If combined with a linear guide, please also state position of linear guide

**Position of Drive Shaft
Standard = 0**

Position of Linear Guide


Standard

Position of the guide on the opposite side of the drive shaft



Opposite to Standard

Position of the guide on the side of the drive shaft




**Position of Drive Shaft
Opposite to Standard = 1**

Position of Linear Guide


Standard

Position of the guide on the opposite side of the drive shaft



Opposite to Standard

Position of the guide on the side of the drive shaft




**Position of Drive Shaft
Both Sides = 2**

Position of Linear Guide


Standard

Position of the guide on the opposite side of the drive shaft




Opposite to Standard

Position of the guide on the side of the drive shaft



Load Case 1 – Top Carrier

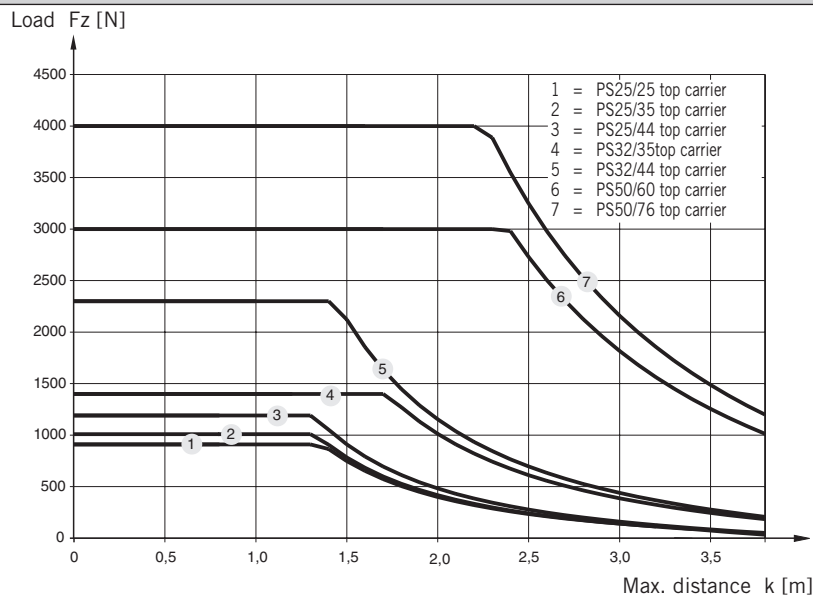


(Up to the curve in the above graph the deflection will be max. 0.2 % of distance k .)


Mid-Section Support

(for versions see 1.44.014E-4)

Mid-section supports are required from a certain stroke length to prevent excessive deflection and vibration of the linear drive. The diagrams show the maximum permissible unsupported length in relation to loading.




Load case 1
Top carrier




Load case 2
Side carrier

Load Case 2 – Side Carrier

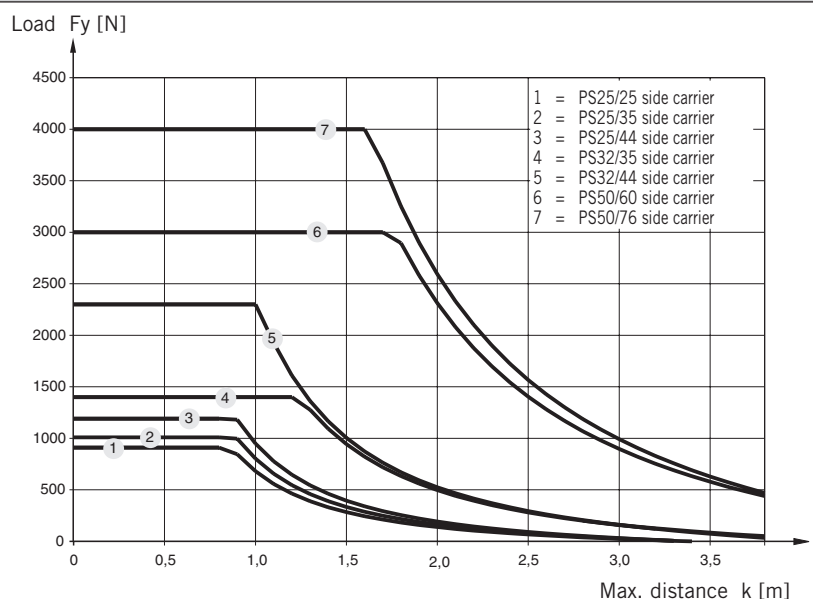

(Up to the curve in the above graph the deflection will be max. 0.2 % of distance k .)

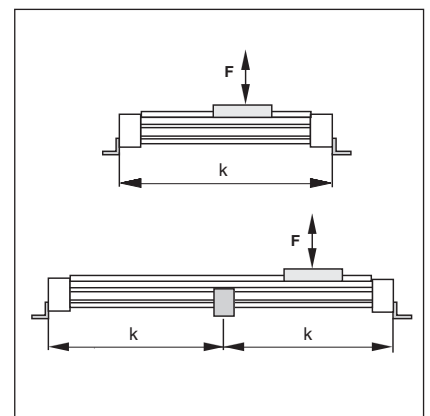

Other Mountings and Options see data sheet 1.45.024E

Service Life

Calculation of service life is achieved in two stages:

- Determination of load factor L_F from the loads to be carried
- Calculation of service life in km

1. Calculation of load factor L_F

$$L_F = \frac{F_y}{F_{y_{\max}}} + \frac{F_z}{F_{z_{\max}}} + \frac{M_x}{M_{x_{\max}}} + \frac{M_y}{M_{y_{\max}}} + \frac{M_z}{M_{z_{\max}}}$$

with combined loads, L_F must not exceed the value 1

Lubrication

For maximum system life, lubrication of the rollers must be maintained at all times.

Only high quality lithium-based greases should be used.


Lubrication intervals are dependent on environmental conditions (temperature, running speed, grease quality etc.) therefore the installation should be regularly inspected.

2. Calculation of service life

• For PS 25/25, PS 25/35 and PS 32/35:	Service life [km] = $\frac{106}{(L_F + 0,02)^3}$
• For PS 25/44, PS 32/44 and PS 50/60:	Service life [km] = $\frac{314}{(L_F + 0,015)^3}$
• For PS 50/76:	Service life [km] = $\frac{680}{(L_F + 0,015)^3}$

Versions

– For electric Linear Drive:
Series OSP-E Belt
Series OSP-E Screw

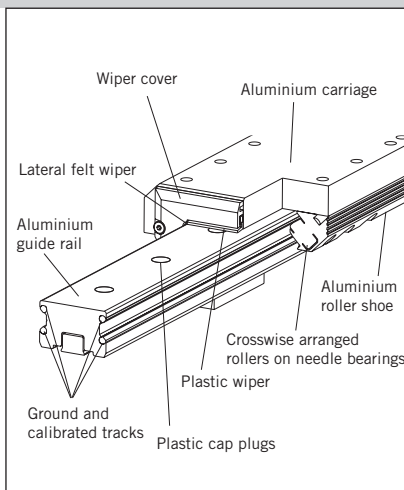

Technical Data


The table shows the maximum permissible loads. If multiple moments and forces act upon the cylinder simultaneously, the following equation applies:

$$\frac{F_y}{F_{y_{\max}}} + \frac{F_z}{F_{z_{\max}}} + \frac{M_x}{M_{x_{\max}}} + \frac{M_y}{M_{y_{\max}}} + \frac{M_z}{M_{z_{\max}}} \leq 1$$

The table shows the maximum permissible values for light, shock-free operation, which must not be exceeded even under dynamic conditions.

With a load factor of < 1, the service life is 5000 km.
The sum of the loads must not exceed >1

Loads, Forces and Moments

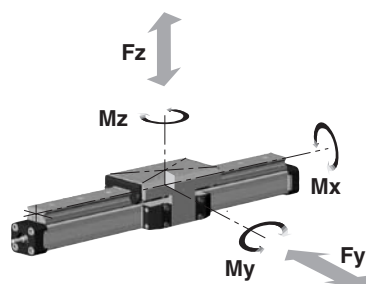

Series	Max. Moments [Nm]			Max. Load [N]	Mass of drive with guide [kg]				Mass guide-carriage [kg]	Order No. PROLINE ¹⁾ for	
	Mx	My	Mz		OSP-E Belt	OSP-E Screw	OSP-E Belt	OSP-E Screw		OSP-E Belt*	OSP-E Screw
PL 25	19	44	44	986	1.9	1.8	0.33	0.40	0.75	20874	20856
PL 32	33	84	84	1348	3.6	3.7	0.58	0.70	1.18	20875	20857
PL 50	128	287	287	3582	8.9	8.8	1.00	1.32	2.50	20876	20859

¹⁾ Stainless steel version on request

Aluminium Roller Guide PROLINE

OSP
— ORIGA
— SYSTEM
— PLUS

Series PL 25 to 50
for Linear Drive

- Series OSP-E Belt *
- Series OSP-E Screw

Features:

- High precision
- High velocities (10 m/s)
- Smooth operation - low noise
- Integrated wiper system
- Compact dimensions - compatible to Slideline plain bearing guide
- Stainless steel version available on request
- Any length of stroke up to 3750 mm
The maximum stroke lengths of drives OSP-E..B, OSP-E..SB and OSP-E..ST must be observed

OSP-E Belt:


for position of guides see page 1.40.024E-2

For further information and technical data see data sheets for linear drives OSP-E Belt (1.20.002E, 1.25.002E) and OSP-E Ball Screw (1.30.002E, 1.35.002E)

* Series PL for OSP-E Bi-parting version on request

For **Linear Drives** see 1.20.002E, 1.25.002E, 1.30.002E, 1.35.002E
For **Mountings** see 1.44.014E

Dimensions Series OSP-E Belt PL25, PL32, PL50

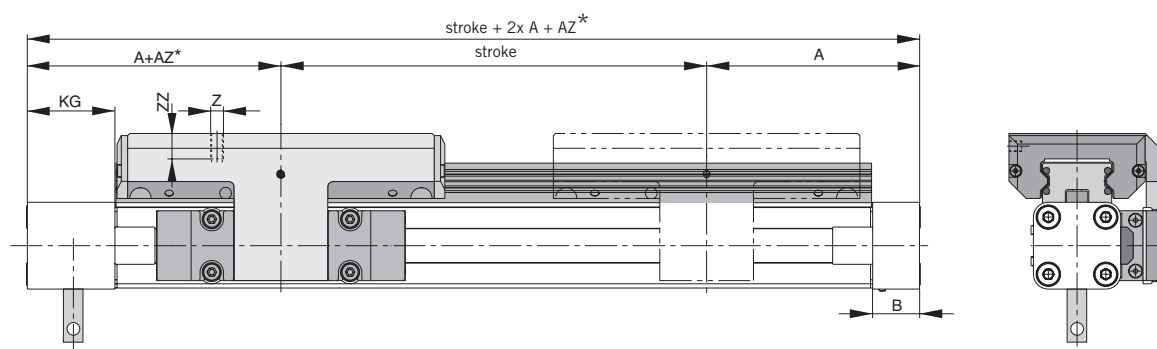


* Please observe:

Dimension "AZ" must be added to dimension "A". The stroke to be ordered will be: stroke + min. dimension "AZ" + additional length (see data sheet 1.20.002-6, 1.25.002-6)
Please observe the effect of dimension "AZ" when retrofitting a guide. Please contact our application engineers.

Dimension Table [mm] Series OSP-E Belt PL25, PL32, PL50

Series	A	B	J	M	Z	AA	AZ	BB	DD	CF	EC	EE	EG	FF	FS	FT	GG	JJ	KG	ZZ
PL25	125	22	117	40,5	M6	154	10	144	60	72.5	32.5	53	39	64	23	73.5	50	120	57	12
PL32	150	25	152	49	M6	197	11	187	80	91	42	62	48	84	25	88	64	160	61	12
PL50	200	25	200	62	M6	276	24	266	120	117	63	75	57	110	29	118.5	90	240	85	16

Dimensions Series OSP-E Screw PL25, PL32, PL50

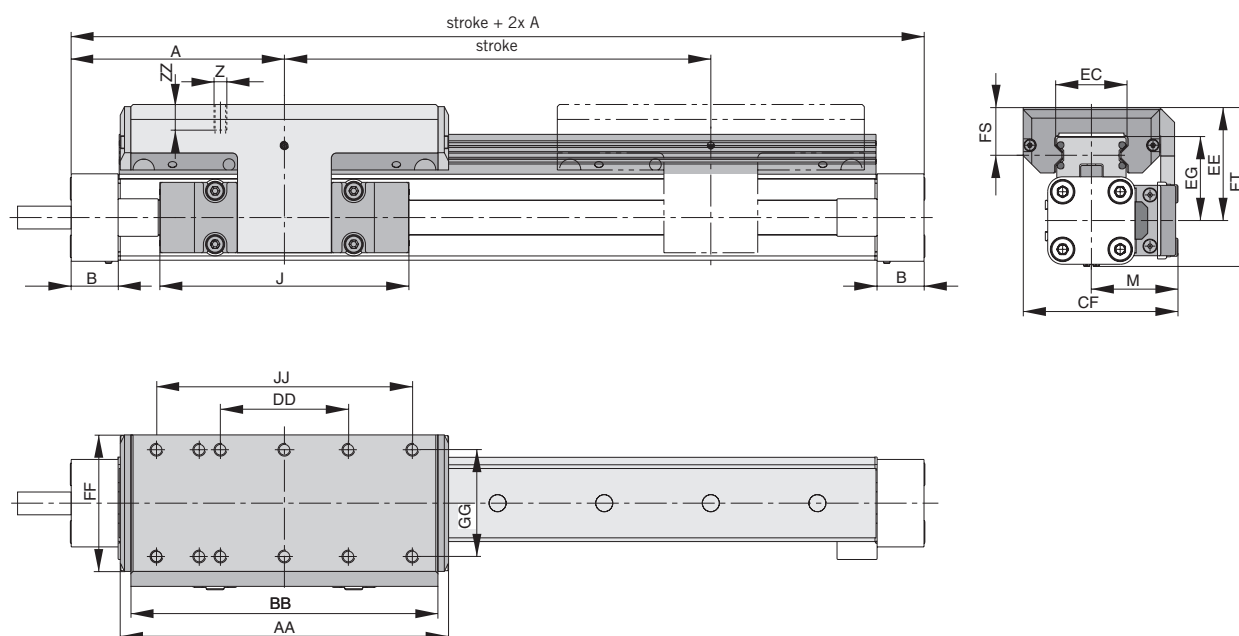

Dimension Table [mm] OSP-E Screw PL25, PL32, PL50

Series	A	B	J	M	Z	AA	BB	DD	CF	EC	EE	EG	FF	FS	FT	GG	JJ	ZZ
PL25	100	22	117	40.5	M6	154	144	60	72.5	32.5	53	39	64	23	73.5	50	120	12
PL32	125	25.5	152	49	M6	197	187	80	91	42	62	48	84	25	88	64	160	12
PL50	175	33	200	62	M6	276	266	120	117	63	75	57	110	29	118.5	90	240	16


OSP-E Belt – If combined with a linear guide, please also state position of linear guide

**Position of Drive Shaft
Standard = 0**

Position of Guide


Standard

Guide opposite the drive shaft



Opposite to Standard

Guide on same side as drive shaft




**Position of Drive Shaft
Opposite to Standard = 1**

Position of Guide


Standard

Guide opposite the drive shaft



Opposite to Standard

Guide on same side as drive shaft




**Position of Drive Shaft
Both Sides = 2**

Position of Guide



Standard

Guide opposite the drive shaft



Opposite to Standard



Guide on same side as drive shaft

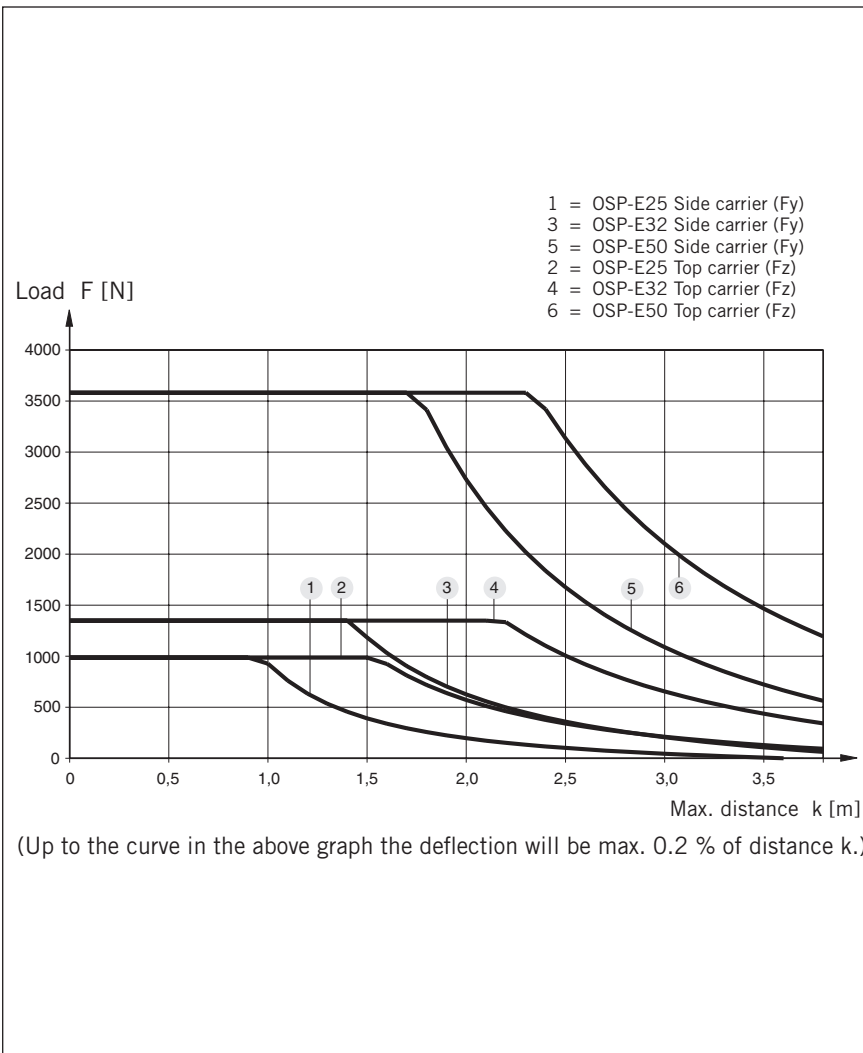


Mid-Section Support

(for versions see 1.44.014E)

Mid-section supports are required from a certain stroke length to prevent excessive deflection and vibration of the linear drive. The diagrams show the maximum permissible unsupported length in relation to loading.

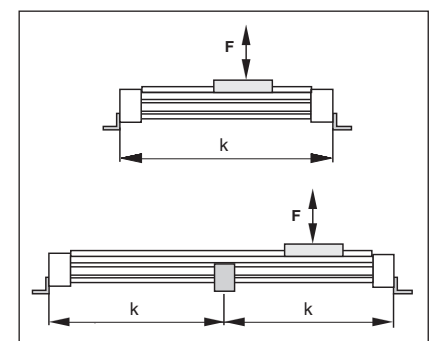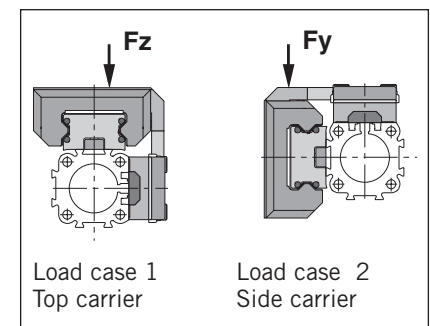

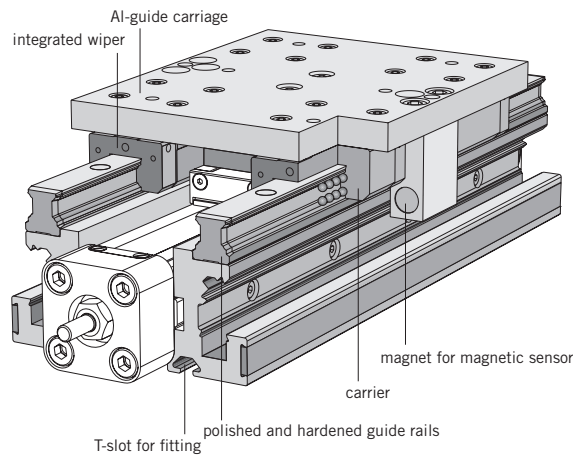


Heavy-duty- Guide HD

OSP
— ORIGA
— SYSTEM
— PLUS


Series HD 25 to 50
for Linear Drive

• Series OSP-E..SB, ..ST

Loads, forces and moments

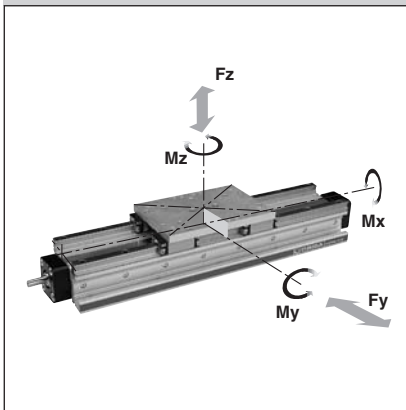

OSP-E..SB, ..ST

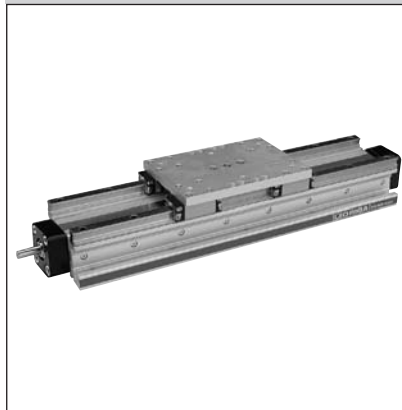

Technical Data

For the maximum permissible loads please refer to the table below. If several forces and moments loads act upon the guide simultaneously, the following equation will apply:

$$\frac{F_y}{F_{y_{\max}}} + \frac{F_z}{F_{z_{\max}}} + \frac{M_x}{M_{x_{\max}}} + \frac{M_y}{M_{y_{\max}}} + \frac{M_z}{M_{z_{\max}}} \leq 1$$

The total of the loads must not exceed 1 under any circumstances.

The table shows the maximum permissible values for light, shock-free operation which must not be exceeded even under dynamic conditions.


Features:

- Guide system
 - 4-row recirculating ball bearing guide
- polished and hardened guide rails of steel
- for highest loads in all directions
- highest precision
- integrated wiper
- grease nipple for relubrication
- anodized guide carriage with the same connecting dimensions as OSP-guide GUIDELINE
- maximum velocity $v = 5 \text{ m/s}$

Series	Max. Moments [Nm]			Max. Load [N]		Mass of drive with guide [kg] at 0 mm stroke				Mass guide-carrier [kg]	Order No HD-guide for OSP-E
	Mx	My	Mz	Fy	Fz	OSP-E..SB	OSP-E..ST	OSP-E..SB	OSP-E..ST		
HD 25	260	320	320	6000	6000	3.215	3.315	0.957	1.007	1.289	21246
HD 32	285	475	475	6000	6000	4.868	4.968	1.198	1.258	1.367	21247
HD 50	1100	1400	1400	18000	18000	13.218	13.318	2.554	2.674	3.551	21249

For **Linear Drives** see 1.30.002E, 1.35.002E

ORIGA

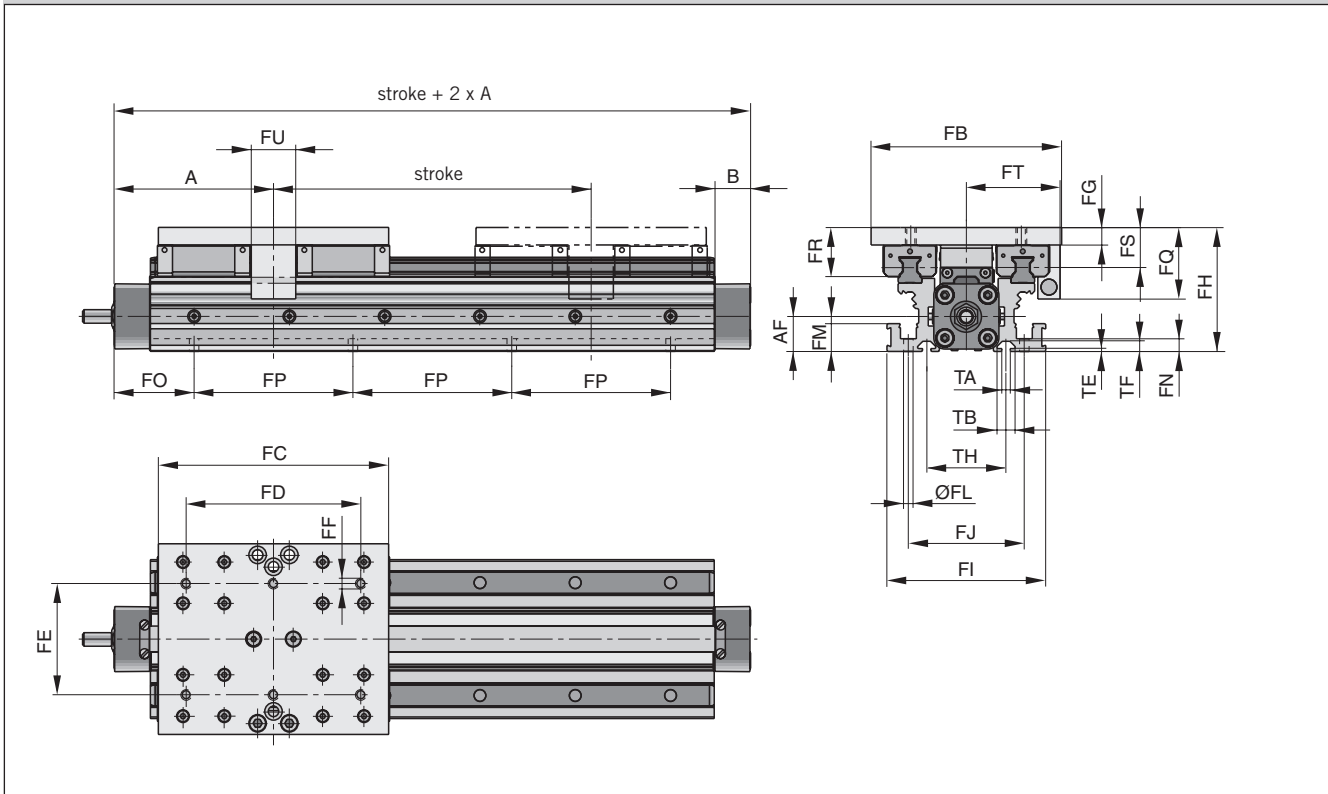

Hint:

The heavy-duty guide HD must be fitted to a level surface over the entire length.

If T-nuts are used, the distance between them must not exceed 100 mm.

Arrangement of magnetic switches:


The magnetic switches can be fitted to either side over the entire length.

More Informations:

Magnet switch see data sheet
1.44.030E

Cable duct see data sheet
1.44.040E

Linear drives OSP-E see data sheet
1.30.002E, 1.35.002E

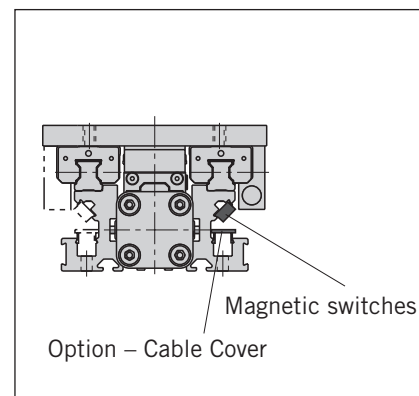

Dimension Table [mm]													
Series	A	B	AF	FB	FC	FD	FE	FF	FG	FH	FI	FJ	ØFL
HD25	100	22	22	120	145	110	70	M6	11	78	100	73	6
HD32	125	25.5	30	120	170	140	80	M6	11	86	112	85	6
HD50	175	33	48	180	200	160	120	M8	14	118	150	118	7.5

Series	FM	FN	FP	FQ	FR	FS	FT	FU	TA	TB	TE	TF	TH
HD25	17.5	8	100	45	31	25	59	28	5.2	11.5	1.8	6.4	50
HD32	17.5	8	100	45	31	25	63	30	5.2	11.5	1.8	6.4	60
HD50	22	10	100	58	44	35.5	89	30	8.2	20	4.5	12.3	76

FO			
OSP-E..SB, ..ST			
x	HD25	HD32	HD50
00	50.0	75.0	75.0
01	50.5	75.5	75.5
02	51.0	76.0	76.0
03	51.5	76.5	76.5
04	52.0	77.0	77.0
05	52.5	77.5	77.5
06	53.0	78.0	78.0
07	53.5	78.5	78.5
08	54.0	79.0	79.0
09	54.5	79.5	79.5
10	55.0	80.0	80.0
11	55.5	80.5	80.5
12	56.0	81.0	81.0
13	56.5	81.5	81.5
14	57.0	82.0	82.0
15	57.5	82.5	82.5
16	58.0	83.0	83.0
17	58.5	83.5	83.5
18	59.0	84.0	84.0
19	59.5	84.5	84.5
20	60.0	85.0	85.0
21	60.5	85.5	85.5
22	61.0	86.0	86.0
23	61.5	86.5	86.5
24	62.0	87.0	87.0
25	62.5	87.5	87.5
26	63.0	88.0	88.0
27	63.5	88.5	88.5
28	64.0	89.0	89.0
29	64.5	89.5	89.5
30	65.0	90.0	90.0
31	65.5	90.5	90.5
32	66.0	91.0	91.0
33	66.5	91.5	91.5
34	67.0	92.0	92.0
35	67.5	92.5	92.5
36	68.0	93.0	93.0
37	68.5	93.5	93.5
38	69.0	94.0	94.0
39	69.5	94.5	94.5
40	70.0	95.0	95.0
41	70.5	95.5	95.5
42	71.0	96.0	96.0
43	71.5	96.5	96.5
44	72.0	97.0	97.0
45	72.5	97.5	97.5
46	73.0	98.0	98.0
47	73.5	98.5	98.5
48	74.0	99.0	99.0
49	74.5	99.5	99.5

FO			
OSP-E..SB, ..ST			
x	HD25	HD32	HD50
50	75.0	50.0	50.0
51	75.5	50.5	50.5
52	76.0	51.0	51.0
53	76.5	51.5	51.5
54	77.0	52.0	52.0
55	77.5	52.5	52.5
56	78.0	53.0	53.0
57	78.5	53.5	53.5
58	79.0	54.0	54.0
59	79.5	54.5	54.5
60	80.0	55.0	55.0
61	80.5	55.5	55.5
62	81.0	56.0	56.0
63	81.5	56.5	56.5
64	82.0	57.0	57.0
65	82.5	57.5	57.5
66	83.0	58.0	58.0
67	83.5	58.5	58.5
68	84.0	59.0	59.0
69	84.5	59.5	59.5
70	85.0	60.0	60.0
71	85.5	60.5	60.5
72	86.0	61.0	61.0
73	86.5	61.5	61.5
74	87.0	62.0	62.0
75	87.5	62.5	62.5
76	88.0	63.0	63.0
77	88.5	63.5	63.5
78	89.0	64.0	64.0
79	89.5	64.5	64.5
80	90.0	65.0	65.0
81	90.5	65.5	65.5
82	91.0	66.0	66.0
83	91.5	66.5	66.5
84	92.0	67.0	67.0
85	92.5	67.5	67.5
86	93.0	68.0	68.0
87	93.5	68.5	68.5
88	94.0	69.0	69.0
89	94.5	69.5	69.5
90	95.0	70.0	70.0
91	95.5	70.5	70.5
92	96.0	71.0	71.0
93	96.5	71.5	71.5
94	97.0	72.0	72.0
95	97.5	72.5	72.5
96	98.0	73.0	73.0
97	98.5	73.5	73.5
98	99.0	74.0	74.0
99	99.5	74.5	74.5

NOTE:

The dimension FO is derived from the last two digits of the stroke:

Sample :

stroke 15 **25** mm


For a cylinder OSP-E25 the table shows that for x = 25 mm:
FO = 62.5 mm

Accessories for Electric Linear Drives Series OSP-E


Description	Illustration	Data Sheet	Page
Motor Mounting (Coupling housing, motor flange, motor coupling)		1.44.006E-2 to -7	120-125
Belt Gear		1.44.006E-8	126
End Cap Mountings, Standard End Cap Mountings for OSP-E with guides		1.44.010E-2, -3, -4, -5 1.44.014E-2, -3	128-131 144, 145
Flange Mountings C		1.44.010E-6	132
Profile Mounting for Multi-Axis systems		1.44.010E-7	133
Mid-Section Support, Standard Mid-Section Support for OSP-E with guides		1.44.010E-8, -9 1.44.014E-2, -4	134, 135 146
Profile connections (Adaptor Profile, T-nut Profile, Connection Profile)		1.44.010E-10, -11, -12	136-138
Trunnion Mounting EN Pivot Mounting EL		1.44.010E-13	139
Clevis Mounting		1.44.010E-14, -15	140, 141
Inversion Mounting		1.44.010E-16	142
Piston Rod Eye		1.44.018E-2	148
Piston Rod Clevis		1.44.018E-2	148
Piston Rod Compensating Coupling		1.44.018E-3	149
Magnetic Switches		1.44.030E	153 - 156
SFI-plus Displacement Measuring System		1.44.035E	157-159
Cable Cover		1.44.040E	161

A1P746DGAG00X

The right to introduce technical
modifications is reserved

Accessories for Electric Linear Drives Series OSP-E

Motor Mountings

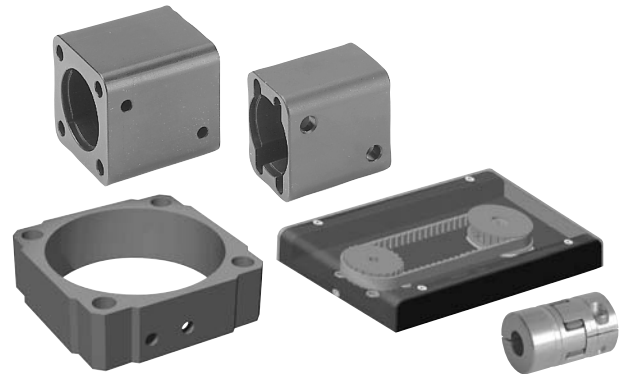

Contents

Description	Data Sheet	Page
Coupling housing (OSP-E..BHD)	1.44.006E-2	120
Motor flanges (OSP-E..BHD)	1.44.006E-2	120
Coupling housing (OSP-E..BV)	1.44.006E-3	121
Motor flanges (OSP-E..BV)	1.44.006E-3	121
Coupling housing (OSP-E..B)	1.44.006E-4	122
Motor flanges (OSP-E..B)	1.44.006E-4	122
Motor Coupling (OSP-E..B)	1.44.006E-4	122
Coupling housing (OSP-E..SB, ..ST, ..SBR, ..STR)	1.44.006E-5	123
Motor flanges (OSP-E..SB, ..ST, ..SBR, ..STR)	1.44.006E-5	123
Motor Coupling (OSP-E..SB, ..ST, ..SBR, ..STR)	1.44.006E-5	123
Motor flanges for freely selectable mounting dimensions (OSP-E..B, ..SB, ..ST, ..SBR, ..STR)	1.44.006E-6, -7	124, 125
Belt Gear for freely selectable mounting dimensions (OSP-E..B, ..SB, ..ST, ..SBR, ..STR)	1.44.006E-7	126

A1P741E00FAG00X

The right to introduce technical modifications is reserved

Coupling Housing Motor Flange

Size 20, 25, 32, 50



- **Series OSP-E..BHD**
Linear Drive with toothed belt and integrated guide


Via the coupling housing the gear or the motor can be fitted directly to the drive and the drive shafts by means of a motor flange.



The motor flange matches the above mentioned coupling housing and has to be reworked to match the respective type of motor.

Motor flanges for the available range of gears, servo and stepper motors are included in the respective data sheet, including technical data and dimensions. Please refer to the respective catalogues.


Coupling Housing (for gear or motor mounting)

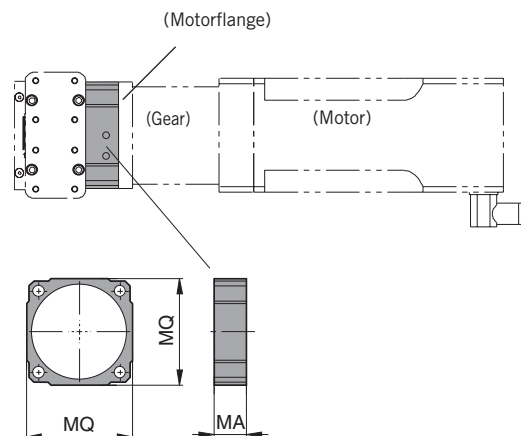

Dimension Table [mm] and Order Instructions

Series	Description	MA	MQ	Order No.
OSP-E20BHD	Coupling Housing	19	60	16215
OSP-E20BHD	Motor Flange LP050	–	–	16224
OSP-E25BHD	Coupling Housing	22	76	12300
OSP-E25BHD	Motor Flange LP070	–	–	12311
OSP-E32BHD	Coupling Housing	30	98	12301
OSP-E32BHD	Motor Flange LP090	–	–	12312
OSP-E50BHD	Coupling Housing	41	128	12302
OSP-E50BHD	Motor Flange LP120	–	–	12313

Motor Flange (semi-finished)

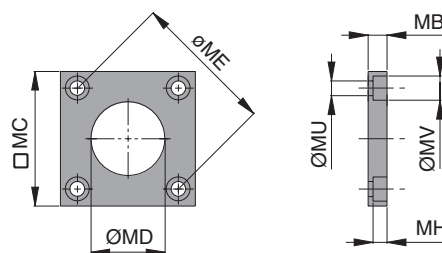


Dimension Table [mm] and Order Instructions

Series	MB	MC	MD	ME	MH	MU	MV	Order No.
OSP-E20BHD	10	75	25	65.8	6.8	6.6	11	16216
OSP-E25BHD	14	90	36	82	8.5	9	15	12308
OSP-E32BHD	14	100	55	106	10.5	11	18	12309
OSP-E50BHD	18	125	77	144	12.5	13.5	20	12310


For Linear Drives see 1.15.002E

Motor Mountings for OSP-E..BV with drive shaft, clamping hub, version 2-5¹⁾

Coupling Housing for direct clamping

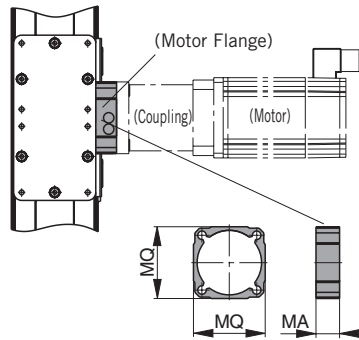

Motor Flange (semi-finished)

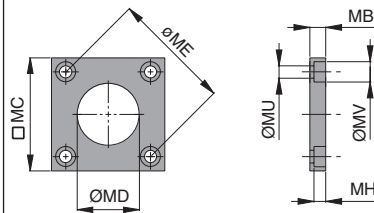


Dimension Table [mm] and Order Instructions


Series	Description	MA	MB	MC	MD	ME	MH	MQ	MU	MV	Order-No.
OSP-E20BV	Coupling Housing	19	–	–	–	–	–	60	–	–	16215
OSP-E20BV	Motor flange semi-finished	–	10	75	25	65,8	6,8	–	6,6	11	16216
OSP-E20BV	Motor flange LP050	–	–	–	–	–	–	–	–	–	16224
OSP-E25BV	Coupling Housing	22	–	–	–	–	–	76	–	–	12300
OSP-E25BV	Motor flange semi-finished	–	14	90	36	82	8,5	–	9	15	12308
OSP-E25BV	Motor flange LP070	–	–	–	–	–	–	–	–	–	12311

Motor Mountings for OSP-E..BV with drive shaft and tenon, version A-D¹⁾


Coupling Housing for clamping with Motor Coupling

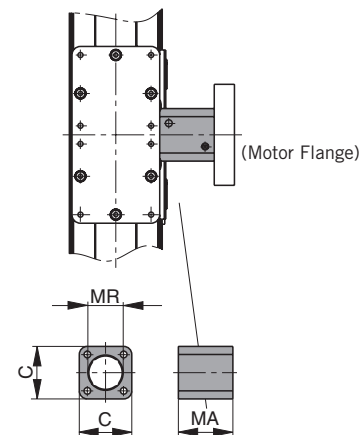

Universal Motor Flange

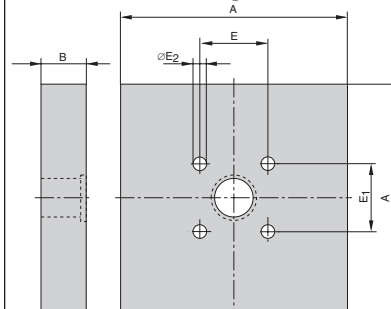

Universal Motor Coupling



Dimension Table [mm] and Order Instructions

Series	Description	A	B	C	E	E ₁	E ₂	MA	MR	Order-No.
OSP-E20BV	Coupling Housing	–	–	60	–	–	–	79	46,5	16269
OSP-E20BV	Universal-Motor Flange	120	15	–	46,5	46,5	6,6	–	–	16267
OSP-E25BV	Coupling Housing	–	–	87	–	–	–	84	48	20139
OSP-E25BV	Universal-Motor Flange	120	15	–	46	46	6,6	–	–	12069

Dimension Table [mm] and Order Instructions for Universal Motor Coupling

Series	MF	ML	MH	MO	MT [Nm]	Order-No.
OSP-E20BV	12 ^{H7}	66	9,5 ^{H7}	40	10,5	16268
OSP-E25BV	16 ^{H7}	66	9,5 ^{H7}	40	10,5	10845

Coupling Housing

Motor Flange

Motor Coupling

Size 20, 25




- Series OSP-E..BV
Vertical Linear Drive with
toothed belt and integrated
recirculating ball bearing guide

The coupling housing with suitable motor flange allows proper connection between the drive shaft of the linear drive and the gear shaft or motor shaft. The gear or motor can either be fitted to the linear drive directly or indirectly.

If a HOERBIGER-ORIGA gear is used, direct clamping of the gear shaft into to the drive shaft with clamping hub. As an alternative the gear or motor can be fitted to the linear drive via a motor coupling.

¹⁾ Hint:

when selecting the type of motor mounting please observe the respective drive shaft versions in accordance with the ordering code of the linear drive (data sheet 1.20.016E-6).

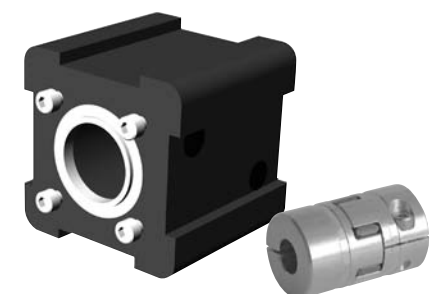

Coupling Housing Motor Flange Motor Coupling

Size 25, 32, 50




• Series OSP-E..B Linear Drive with Belt

The coupling housing with suitable motor flange allows easy and inherently stable connection of the gear or the motor to the linear drive.


Hint:

Let us know the mounting dimensions of your motor. Upon request we will be pleased to check and manufacture a motor flange that will come up to your individual needs.

(Also see "motor flange for freely selectable mounting dimensions" data sheet 1.44.006E-6)

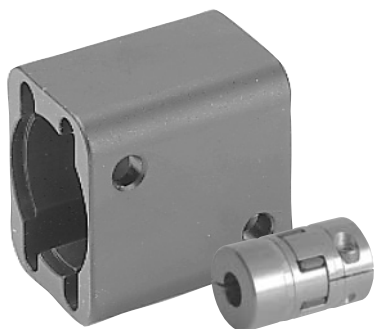

Coupling Housing (for gear or motor mounting)

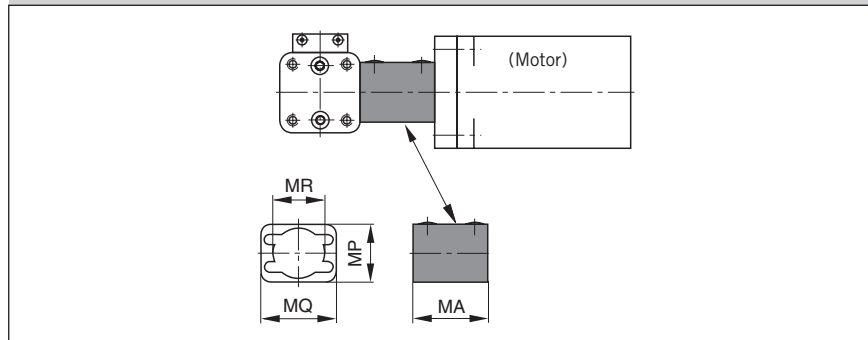


Dimension Table [mm] and Order Instructions


Series	Typ	MA	MP	MQ	MR	Order No.
OSP-E25B	250	47	30	40	25	20606
OSP-E32B	320	49	38	49	33	20607
OSP-E50B	500	76	54	65	48	20608

Universal Motor Flange and Motor Coupling

Universal Motor Flange

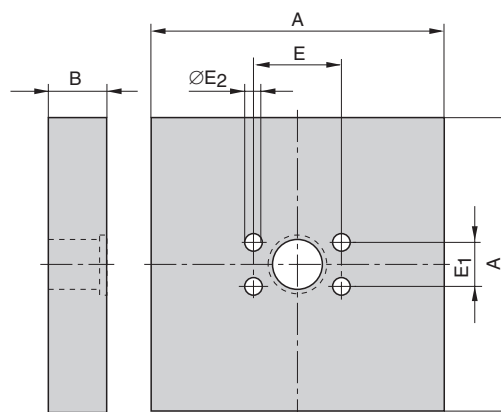

Universal Motor Coupling



Dimension Table [mm] and Order Instructions für Universal Motor Flange

Series	A	B	E	E ₁	E ₂	Order No.
OSP-E25B	100	20	30	15	5.5	12050
OSP-E32B	100	20	38	18	6.6	12053
OSP-E50B	120	15	50	32	9.0	12056


Dimension Table [mm] and Order Instructions für Universal Motor Coupling

Series	MF ^{H7}	ML	MH ^{H7} *	MO	MT [Nm]	Order No.
OSP-E25B	10	30	4	20	0.76	15231
OSP-E32B	10	35	6	30	1.34	15197
OSP-E50B	16	66	9.5	40	10.5	10845

* can be bored out to motor shaft diameter by customer.
Other dimensions on request

For **Linear Drive** see Data Sheet 1.20.002E, 1.25.002E

Coupling Housing (for motor)

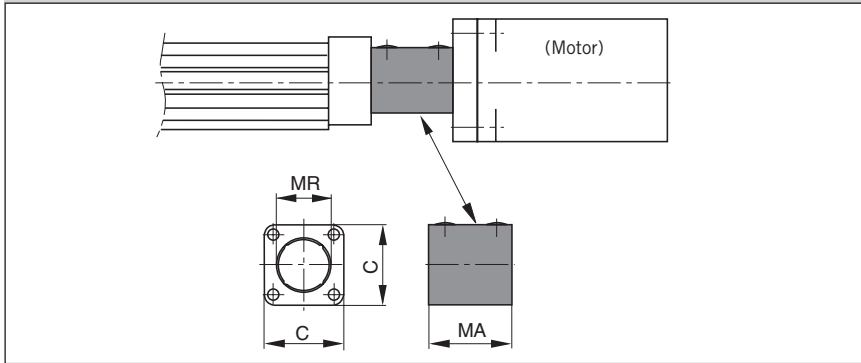


Dimension Table [mm] and Order Instructions

Series	Typ	MA	C	MR	Order No.
OSP-E25*	251	38	41	25	20137
OSP-E32*	321	54	52	33	20138
OSP-E50*	501	84	87	48	20139

* ..SB, ..ST, ..SBR, ..STR

Universal Motor Flange and Motor Coupling

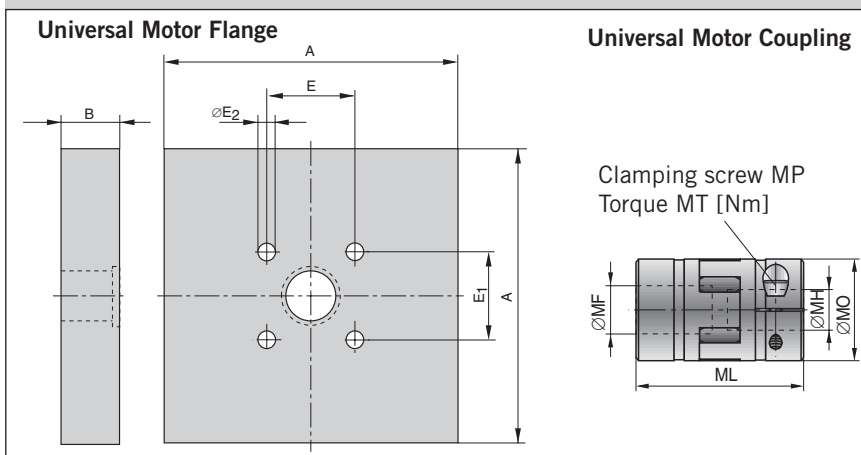

Dimension Table [mm] and Order Instructions for Universal Motor Flange

Series	A	B	E	E ₁	E ₂	Order No.
OSP-E25*	100	20	27	27	5.5	12060
OSP-E32*	100	20	36	36	6.6	12064
OSP-E50*	120	15	46	46	6.6	12069

* ..SB, ..ST, ..SBR, ..STR

Dimension Table [mm] and Order Instructions for Universal Motor Coupling

Series	MF ^{H7}	ML	MH ^{H7} **	MO	MT [Nm]	Order No.
OSP-E25*	6	30	6	20	0.76	12073
OSP-E32*	10	35	6	30	1.34	15197
OSP-E50*	15	66	9.5	40	10.5	12079

* ..SB, ..ST, ..SBR, ..STR

** can be bored out to motor shaft diameter by customer.
Other dimensions on request.

For **Linear Drives** see 1.30.00E2, 1.35.00E2, 1.35.011E

Coupling Housing Motor Flange Motor Coupling

Size 25, 32, 50

OSP
— ORIGA
— SYSTEM
— PLUS

• **Series**
OSP-E..SB, ..ST, ..SBR, ..STR
Linear Drive with Screw

The coupling housing with suitable motor flange allows easy and inherently stable connection of the gear or the motor to the linear drive.

Hint:

Let us know the mounting dimensions of your motor. Upon request we will be pleased to check and manufacture a motor flange that will come up to your individual needs.

(Also see “motor flange for freely selectable mounting dimensions” data sheet 1.44.006E-6)



Motor Flange

for freely selectable
mounting dimensions

Size 25, 32, 50

OSP
— ORIGA
— SYSTEM
— PLUS

- Series OSP-E..B
Linear Drive with Belt
- OSP-E..SB, ..ST, ..SBR, ..STR
Linear Drive with Screw

The motor flange for motors with freely selectable mounting dimensions offers flexible possibilities to connect most different types of motors to the electric linear drives OSP-E. The drive shafts of linear drive and motor are connected with a motor coupling in the coupling housing and the motor flange is centred.


Hint

Please check the following data for the connection of the motor to the freely selectable motor flange and state when ordering:


1. mounting angle W of the motor
2. bore hole version B as thread M or counterbore S
3. pitch circle diameter A as a function of M or S
4. Diameter of centring spigot
5. Length of motor shaft G

Flange version

Belt drive

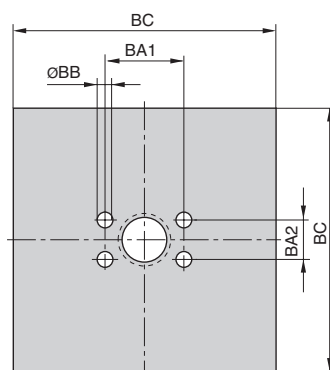

Screw drive

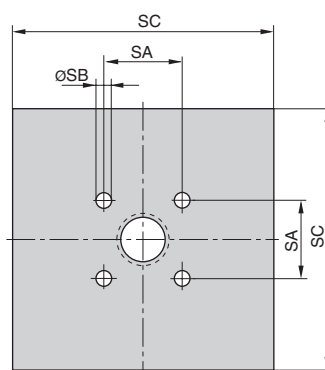


Dimension Table [mm] and Order Instructions

Size	BA1	BA2	ØBB	BC	SA	ØSB	SC	Order No.
25	30	15	5.5	100	27	5.5	100	Motor Flange
32	38	18	6.6	100	36	6.6	100	Motor Flange
50	50	32	9.0	120	46	6.6	120	Motor Flange

Variable Dimensions for Flange


Version Thread „M“

Flange plate with thread,
Motor flange with through
bolt




Version Counterbore „S“



Flange plate with through bore
Motor flange with thread



Version Counterbore „S“




Version Thread „M“

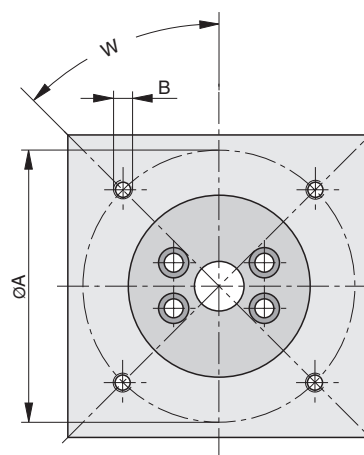

Counterbore Dimensions [mm]

Scrw.Size B	Ø d4	Ø d5	d6
M4x16	4.5	8	4.6
M5x22	5.5	10	5.7
M6x20	6.6	11	6.8
M8x25	9	15	9
M10x25	11	18	11



Dimension table of the variable dimensions [mm] – Version for Belt drive						
W	45 °			90 °		
Size	25	32	50	25	32	50
A min. Vers. S	48 + Ød5	60 + Ød5	80 + Ød5	40 + Ød5	49 + Ød5	65 + Ød5
max. Vers. S	135 - Ød5	135 - Ød5	160 - Ød5	100 - Ød5	100 - Ød5	120 - Ød5
min. Vers. M	45 + B	55 + B	75 + B	40 + B	48 + B	50 + B
max. Vers. M	135 - B	135 - B	160 - B	96 - B	96 - B	116 - B
B max.	M10			M10		
D min.	20	30	40	20	30	40
max.	98	98	118	85	85	105
G min.	18	21	32	18	21	32
max.	33	35	45	33	35	45

Dimension table of the variable dimensions [mm] – Version for Screw drive						
W	45 °			90 °		
Size	25	32	50	25	32	50
A min. Vers. S	58 + Ød5	74 + Ød5	123 + Ød5	41 + Ød5	52 + Ød5	87 + Ød5
max. Vers. S	135 - Ød5	135 - Ød5	160 - Ød5	100 - Ød5	100 - Ød5	120 - Ød5
min. Vers. M	525 + B	68 + B	82 + B	30 + B	40 + B	50 + B
max. Vers. M	135 - B	135 - B	160 - B	96 - B	96 - B	116 - B
B max.	M10			M10		
D min.	20	30	40	20	30	40
max.	98	98	118	85	85	105
G min.	18	21	32	18	210	32
max.	33	35	45	33	35	45

Legend

W [°] = Angle of fastening boreholes
 A [mm] = Pitch circle diameter
 B = Thread size of fastening screw
 (version: M = thread, S = counterbore)
 D [mm] = Diameter of centring spigot
 E [mm] = Depth of centring spigot
 F [mm] = Diameter of motor shaft
 G [mm] = Length of motor shaft

Belt Gear

for freely selectable mounting dimensions

Size 25, 32, 50



• Series OSP-E..SB, ..ST, ..SBR, ..STR Linear Drive with Screw


The toothed belt gear with its freely selectable mounting dimensions offers the possibility to fit most different types of motors to the linear drive parallel to the motor axis. After the flange dimensions of the motor had been checked, the mounting side of the motor will be prepared for the individual demands of the customer.

When ordering please observe the version of the drive shaft of the linear drive OSP-E with spindle. This version can either be ordered with plain shaft or plain shaft with keyway (Option). (If the version keyway is selected, the delivery period may be elongated.)


Ausführungen der Antriebswelle OSP-E with Screw	
Order no.	Drive shaft
OSP-E..*...0-.....	Plain
OSP-E..*...3-.....	Key way
OSP-E..*...4-.....	Key way, long
*1=SB, 2=ST, 3=STR, 4=SBR	

Max. allowed Moments M [Nm] for Belt Gear		
Size	Transmission ratio 1:1	2:1
25	5	5
32	10	10
50	20	20

Beware of the max. allowed moments of the corresponding linear drive.



Belt Gear

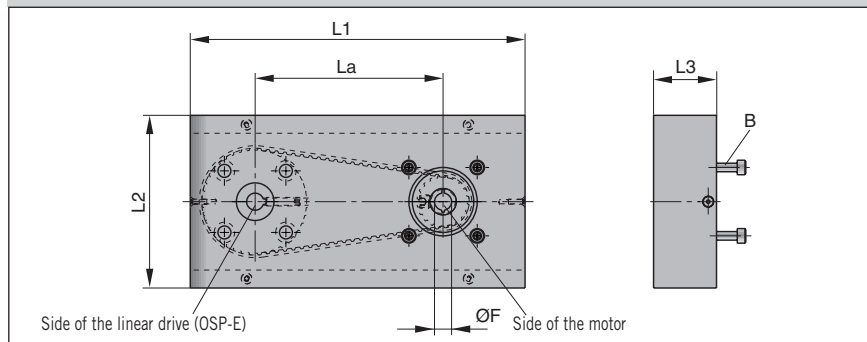


Dimension Table [mm] and Order Instructions

Series	L1	L2	L3	La 1:1	2:1	B	Ø F*	Order No.
OSP-E25	186	101	30	110	109.3	M4 – M10	6, 7, 8, 9, 10, 11	15576
OSP-E32	196	101	37	110	111.4		8, 9, 10, 11, 12, 14	15576
OSP-E50	234	101	50	135	133.7		12, 14, 16, 19	15576

* other diameters on request

Variable Dimensions for Motor Mounting

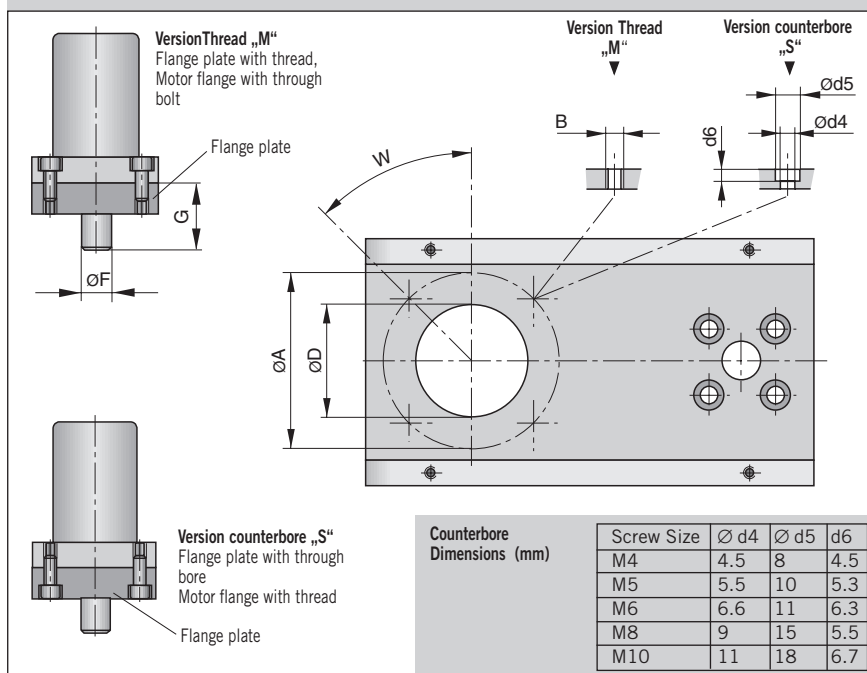

Dimension table of the variable dimensions [mm]

W	45 °			90 °		
	25	32	50	25	32	50
Size						
A min.	30			30		
max. Vers. S	110 - Ød5			70 - Ød5	70 - Ød5	80 - Ød5
max. Vers. M	110 - Ød4			70 - Ød4	70 - Ød4	80 - Ød4
B max.	M 8			M 8		
D min.	20			20		
max.	80	80	100	60	60	70
G min.	16	20	30	16	20	30
max.	23	30	40	23	30	40
ØF [mm]	6, 7, 8, 9, 10, 11	8, 9, 10, 11, 12, 14	12, 14, 16, 19	6, 7, 8, 9, 10, 11	8, 9, 10, 11, 12, 14	12, 14, 16, 19

Accessories for Electric Linear Drives Series OSP-E

Mountings, Sensors



Contents

Description	Data Sheet	Page
End Cap Mounting (OSP-E..BHD)	1.44.010E-2 ,3	128, 129
End Cap Mounting (OSP-E..B, ..SB, ..ST)	1.44.010E-4	130
End Cap Mounting (OSP-E..SBR, ..STR)	1.44.010E-5	131
Flange Mounting C (OSP-E..SBR, ..STR)	1.44.010E-6	132
Profile Mounting for Multi-Axis systems (OSP-E..)	1.44.010E-7	133
Mid-Section Support (OSP-E..BHD)	1.44.010E-8	134
Mid-Section Support (OSP-E..)	1.44.010E-9	135
Adaptor Profile (OSP-E..)	1.44.010E-10	136
T-Nut Profile (OSP-E..)	1.44.010E-11	137
Connection Profile (OSP-E..)	1.44.010E-12	138
Trunnion Mounting EN (OSP-E..SBR, ..STR)	1.44.010E-13	139
Pivot Mounting EL (OSP-E..SBR, ..STR)	1.44.010E-13	139
Clevis Mounting (OSP-E..B, ..SB, ..ST)	1.44.010E-14	140
Clevis Mounting, low backlash (OSP-E..B, ..SB, ..ST)	1.44.010E-15	141
Inversion Mounting (OSP-E..B, ..SB, ..ST)	1.44.010E-16	142

A1P742E00FAG00X

The right to introduce technical
modifications is reserved

End Cap Mounting

Size 20, 25, 32, 50





- Series OSP-E..BHD
For Linear Drive with Toothed Belt
and integrated Guides

On the end-face of each end cap there are eight threaded holes for mounting the actuator.

Material:
Anodized aluminium.

The mountings are supplied in pairs.

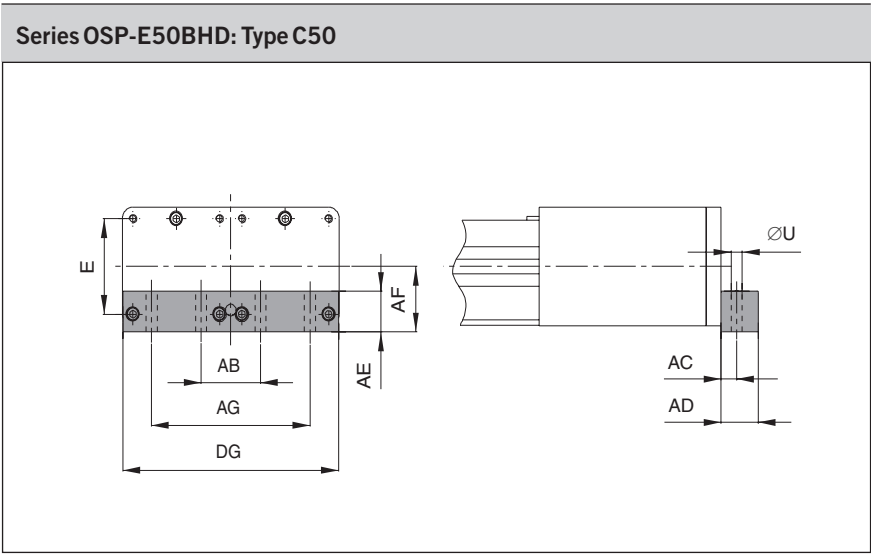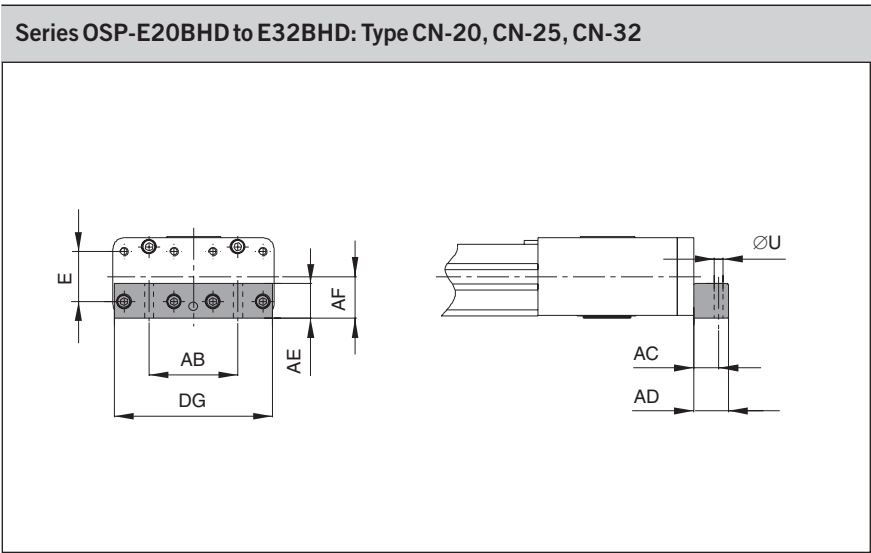


Dimension Table [mm] and Order Instructions


Series	Type	E	ØU	AB	AC	AD	AE	AF	AG	DG	Order No. *)
OSP-E20BHD	CN-20	27	6,6	40	10	20	20	22	–	74	16213
OSP-E25BHD	CN-25	27	6,6	52	16	25	25	22	–	91	12266
OSP-E32BHD	CN-32	36	9	64	18	25	25	30	–	114	12267
OSP-E50BHD	CN-50	70	9	48	12,5	30	30	48	128	174	12268

*) = Pair

**Series OSP-E20BHD to E32BHD:
Type CO-20, CO-25, CO-32**

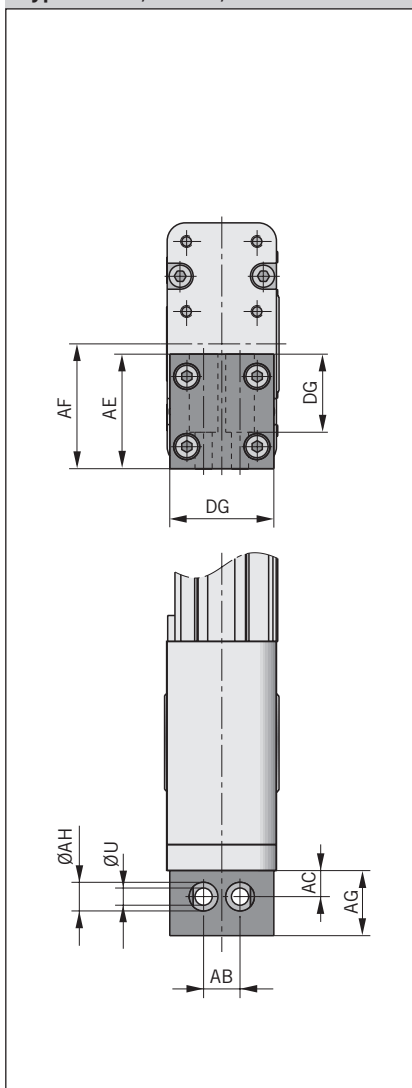

**Series OSP-E50BHD:
Type CO-50**

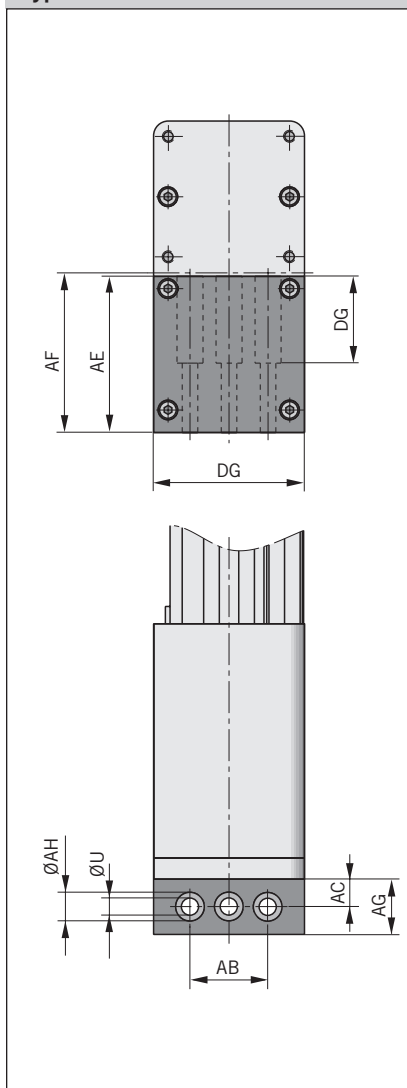

End Cap Mounting

Size 20, 25, 32, 50



- Series OSP-E..BHD
Linear Drive with Belt and
Integrated Guide

On the end-face of each end cap there are eight threaded holes each for mounting the actuator.


Material:
Anodized aluminium.

The mountings are supplied in pairs.

Dimension Table [mm] and Order Instructions

Series	Type	ØU	AB	AC	AD	AE	AF	AG	ØAH	DG	Order No. *)
OSP-E20BHD	CO-20	6,6	18	15	22	42	45	39	11	40	16241
OSP-E25BHD	CO-25	6,6	14	10	25	44	48	30	11	40	16245
OSP-E32BHD	CO-32	9	19	12	28	60	62	42	15	56	16246
OSP-E50BHD	CO-50	9	45	16	32	90	92	50	15	87	16247

*) = Pair



End Cap Mounting

Size 25, 32, 50



- Series OSP-E..SBR, ..STR
Linear Drive with Screw
and extending rod

On the end-face of each end cap there are four threaded holes for mounting the actuator.

The hole layout is square, so that the mounting can be fitted to the bottom, top or either side.

Material:




Series OSP-25 to 32:

Galvanised steel.

Series OSP-50:

Anodized aluminium.

The mountings are supplied as pairs

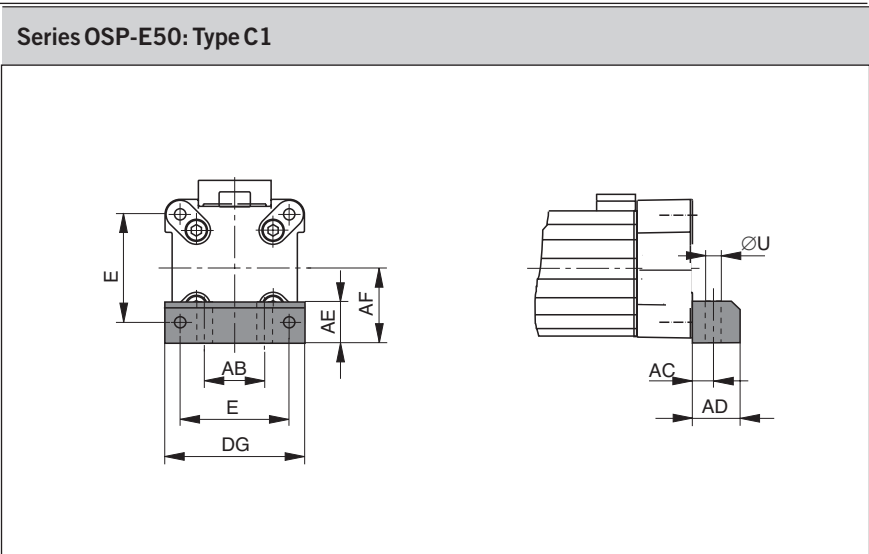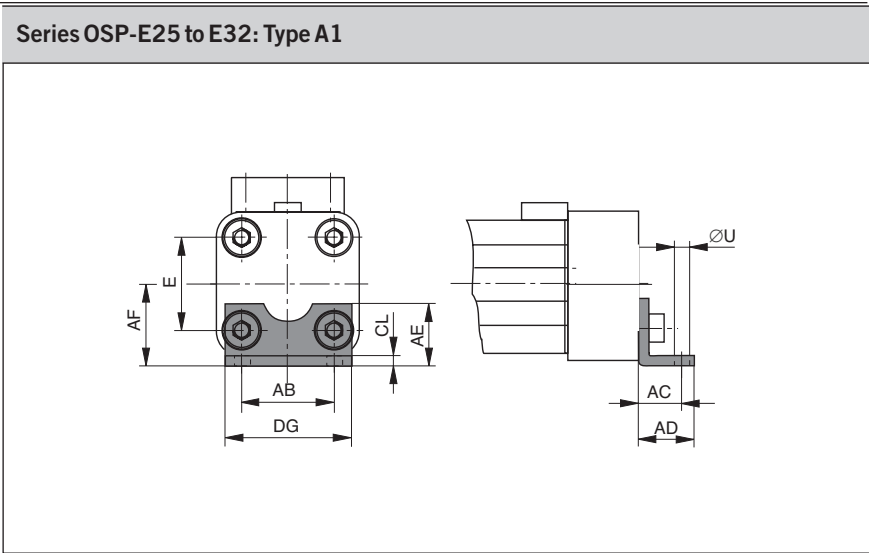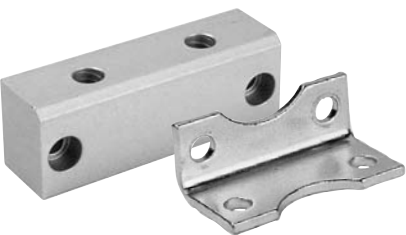

Dimension Table [mm] and Order Instruction


Series	E	ØU	AB	AC	AD	AE	AF	CL	DG	Order No. *)	
										Typ A1	Typ C1
OSP-E25	27	5,8	27	16	22	18	22	2,5	39	2010	–
OSP-E32	36	6,6	36	18	26	20	30	3	50	3010	–
OSP-E50	70	9	40	12,5	24	30	48	–	86	–	5010

*) = Pair

Important:
With the OSP-E Screw series, the end cap mounting can only be used at the end opposite to the drive shaft.

We recommend the application of two mid section supports (data sheet 1.44.010E-9) at the drive shaft end of the actuator.

Series OSP-E25SBR, 25STR to E32SBR, 32STR: Type A1SR

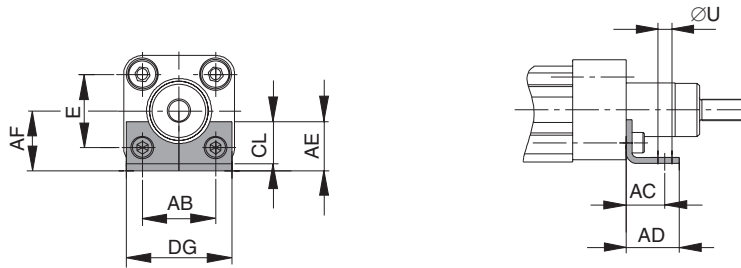

End Cap Mounting

Size 25, 32, 50

OSP
ORIGA
SYSTEM
PLUS

- Series OSP-E..SBR, ..STR
Linear Drive with Screw
and extending rod

On the end-face of each end cap there are four threaded holes for mounting the actuator.

The hole layout is square, so that the mounting can be fitted to the bottom, top or either side.

Material:

Series OSP-25 to 32:


Galvanised steel.

Series OSP-50:

Anodized aluminium.

The mountings are supplied as pairs

Series OSP-E50SBR, 50STR: Type C1SR

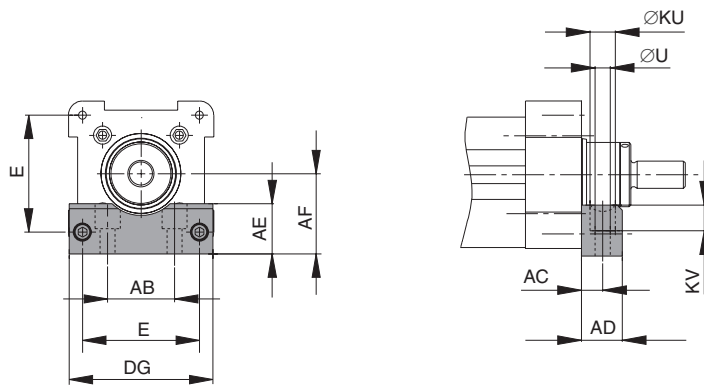

Dimension Table [mm] and Order Instruction

Series	E	ØU	AB	AC	AD	AE	AF	CL	DG	ØKU	KV	Order No. *)	
												Type A1SR	Type C1SR
OSP-E25SBR, STR	27	5,8	27	16	22	18	22	2,5	39	–	–	12263	–
OSP-E32SBR, STR	36	6,6	36	18	26	20	30	3	50	–	–	12264	–
OSP-E50SBR, STR	70	9	40	12,5	24	30	48	–	86	15	15	–	12265

*) = single

Important:

With the OSP-E Screw series, the end cap mounting can only be used at the end opposite to the drive shaft.

We recommend the application of two mid section supports (data sheet 1.44.010E-9) at the drive shaft end of the actuator.



Flange Mounting C


Size 25, 32, 50



- Series OSP-E..SBR, ..STR
Linear Drive with Screw
and extending rod

The flange mounting C-E can only be mounted at the piston rod end of the linear drive.

Material: Aluminium

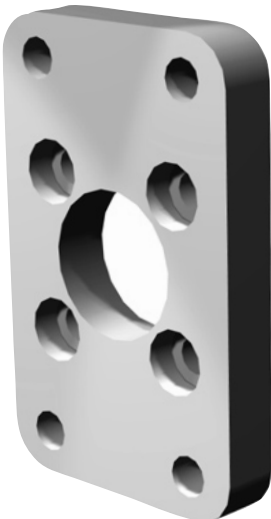


Series OSP-E25SBR, STR to E50SBR, STR: Type C-E..

Dimension Table [mm] and Order Instructions									
Series	Type	ø FB	E	MF	R	TF	UF	W	Order No.
OSP-E25SBR, STR	C-E25	7	50	10	32	64	79	16	12232
OSP-E32SBR, STR	C-E32	9	56	10	36	72	90	16	12233
OSP-E50SBR, STR	C-E50	12	100	16	63	126	153	21	12234

Series OSP-E25 to E50, Type MAE-..

OSP-E..B, ..SB, ..ST, ..SBR, ..STR

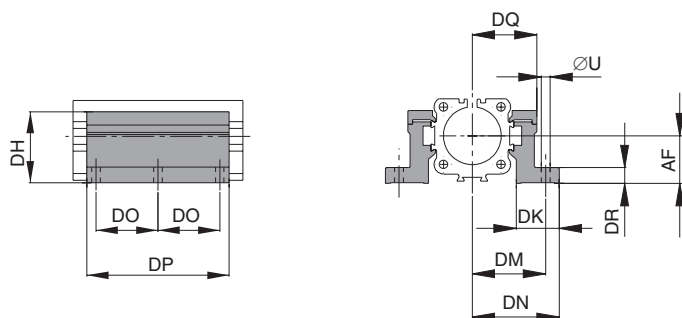

Profile Mountings for Multi-Axis Systems

Size 20, 25, 32, 50




• Series OSP-E

Material: Anodized aluminum

Stainless steel version on request.

The mountings are supplied in pairs.

Series OSP-E20BHD to E50BHD, Type MAE-..

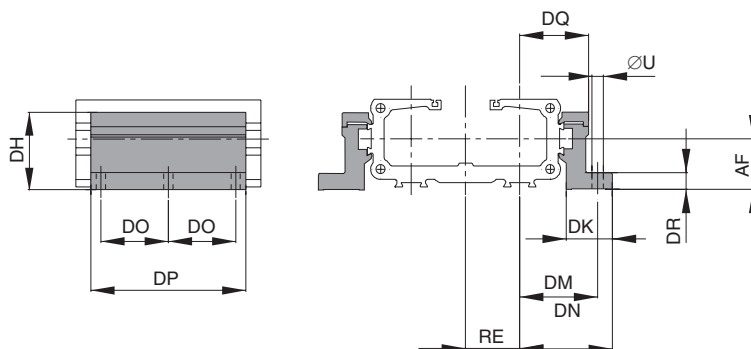

Weight (mass) [kg]

Series	Weight (mass) [kg] (pair)
MAE-20	0,3
MAE-25	0,3
MAE-32	0,4
MAE-50	0,8



Dimension Table [mm] and Order Instructions

Series	Type	R	U	AF	DF	DH	DK	DM	DN	DO	DP	DQ	DR	DT	EF	EM	EN	EQ	RE	Order No.
OSP-E20	MAE-20	M5	5.5	22	27	38	26	33.5	41	40	92	28	8	10	41,5	28.5	49	36	26	12278
OSP-E25	MAE-25	M5	5.5	22	27	38	26	40	47.5	40	92	34.5	8	10	41.5	28.5	49	36	26	12278
OSP-E32	MAE-32	M5	5.5	30	33	46	27	46	54.5	40	92	40.5	10	10	48.5	35.5	57	43	32	12279
OSP-E50	MAE-50	M6	7	48	40	71	34	59	67	45	112	52	10	11	64	45	72	57	44	12280

Mid-Section Support

Size 20, 25, 32, 50



- Series OSP-E ..BHD
Linear Drive with Toothed Belt
and integrated guide


Note on Types E1 and D1:
The mid-section support can also be mounted on the underside of the actuator, in which case its distance from the centre of the actuator is different.
For design notes, see data sheet 1.15.002E-3

Stainless steel version on request.


The mountings are supplied singly.



Series OSP-E20BHD to E50BHD: Type E1
(Mounting with through holes)

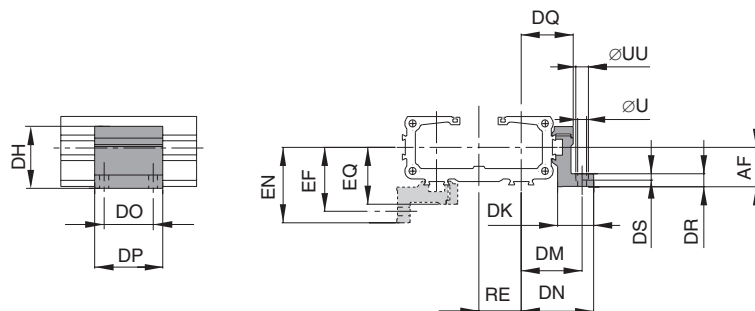


Series OSP-E20BHD to E50BHD: Type D1
(Mountings with internal thread)

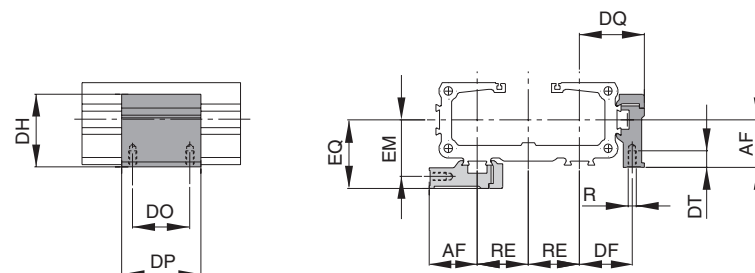

Dimension Table [mm] and Order Instructions

Series	R	U	UU	AF	DF	DH	DK	DM	DN	DO	DP	DQ	DR	DS	DT	EF	EM	EN	EQ	RE	Order No.	
																					Type E1	Type D1
OSP-E20	M5	5.5	10	22	20.5	38	26	33.5	41	36	50	28	8	5.7	10	41.1	28.1	48.6	35.6	23	20009	20008
OSP-E25	M5	5.5	10	22	27	38	26	40	47.5	36	50	34.5	8	5.7	10	41.5	28.5	49	36	26	20009	20008
OSP-E32	M5	5.5	10	30	33	46	27	46	54.5	36	50	40.5	10	5.7	10	48.5	35.5	57	43	32	20158	20157
OSP-E50	M6	7	-	48	40	71	34	59	67	45	60	52	10	-	11	64	45	72	57	44	15536	15534

Series OSP-E25, E32, E50, Type E1
(Mounting from above / below with 2 through holes)

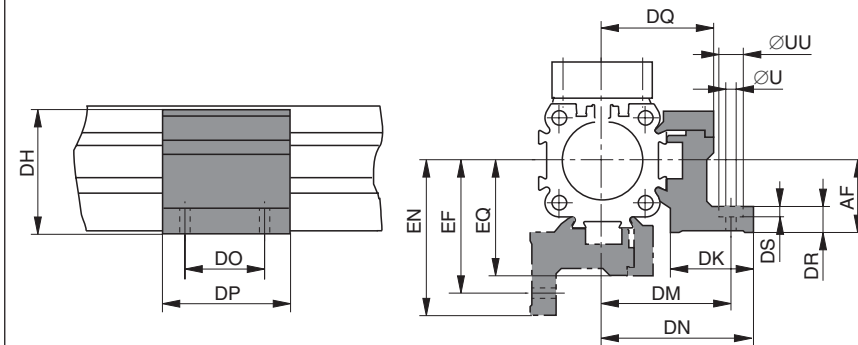

Mid-Section Support

Size 25, 32, 50

OSP
— ORIGA
— SYSTEM
— PLUS


- **Series OSP-E..B**
Linear Drive with toothed Belt and integrated Guides
- **Series OSP-E..SB, ..ST, ..SBR, ..STR**
Linear Drive with Screw

Note on Types E1 and D1:
The mid-section support can also be mounted on the underside of the actuator, in which case its distance from the centre of the actuator is different.

For design notes, see data sheet
1.20.002E-3, 1.25.002E-3,
1.30.002E-3, 1.35.002E-3

Stainless steel version on request

Series OSP-E25, E32, E50, Type D1
(Mountings from below with 2 screws, internal thread)

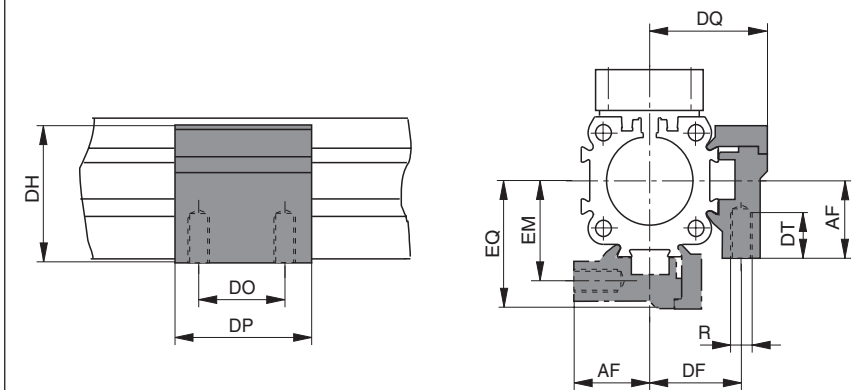

Dimension Table [mm] and Order Instructions

Series	R	U	UU	AF	DF	DH	DK	DM	DN	DO	DP	DQ	DR	DS	DT	EF	EM	EN	EQ	Order No.	
																				Type E1	Type D1
OSP-E25	M5	5.5	10	22	27	38	26	40	47.5	36	50	34,5	8	5.7	10	41.5	28.5	49	36	20009	20008
OSP-E32	M5	5.5	10	30	33	46	27	46	54.5	36	50	40,5	10	5.7	10	48.5	35.5	57	43	20158	20157
OSP-E50	M6	7	–	48	40	71	34	59	67	45	60	52	10	–	11	64	45	72	57	20163	20162



Adaptor Profile

Size 20, 25, 32, 50





• Series OSP-E

Adaptor Profile OSP

- A universal attachment for mounting of additional items
- Solid material


The mountings are supplied singly.

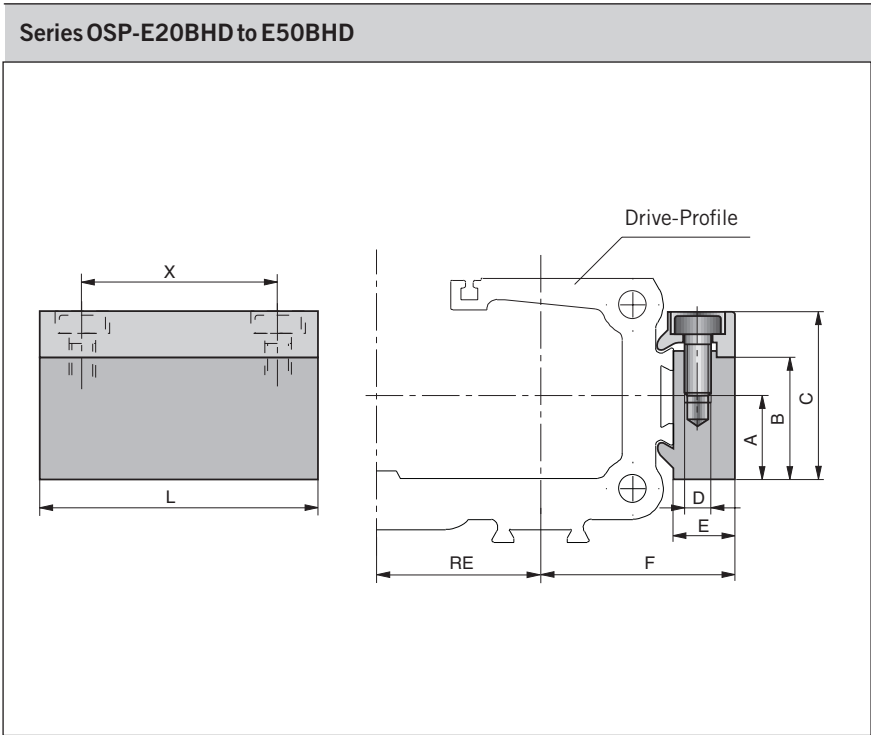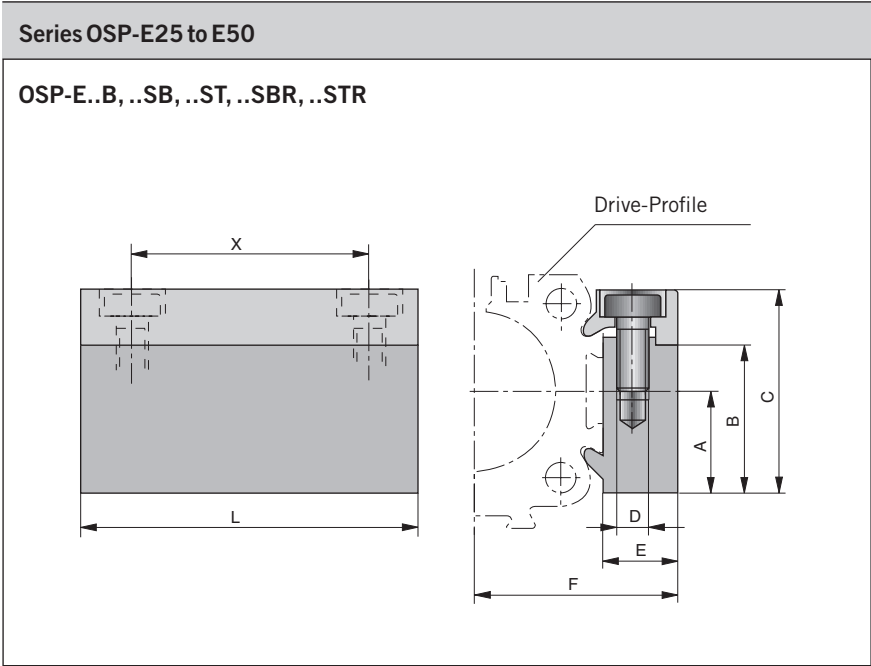

Dimension Table [mm] and Order Instructions											
Series	A	B	C	D	E	F	L	X	RE	Order No.	
										Standard	Stainless
OSP-E20	16	23	32	M5	10.5	24	50	36	23	20006	20186
OSP-E25	16	23	32	M5	10.5	30.5	50	36	26	20006	20186
OSP-E32	16	23	32	M5	10.5	36.5	50	36	32	20006	20186
OSP-E50	20	33	43	M6	14	52	80	65	44	20025	20267

Series OSP-E25 to E50

OSP-E..B, ..SB, ..ST, ..SBR, ..STR

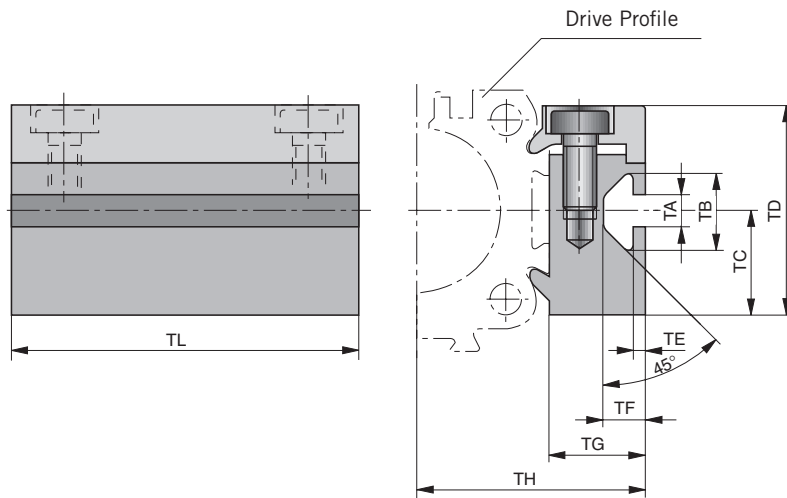

T-Nut Profile

Size 20, 25, 32, 50




• Series OSP-E

T-Nut Profile OSP

- A universal attachment for mounting with standard T-nuts.

The mountings are supplied singly.

Series OSP-E20BHD to E50BHD

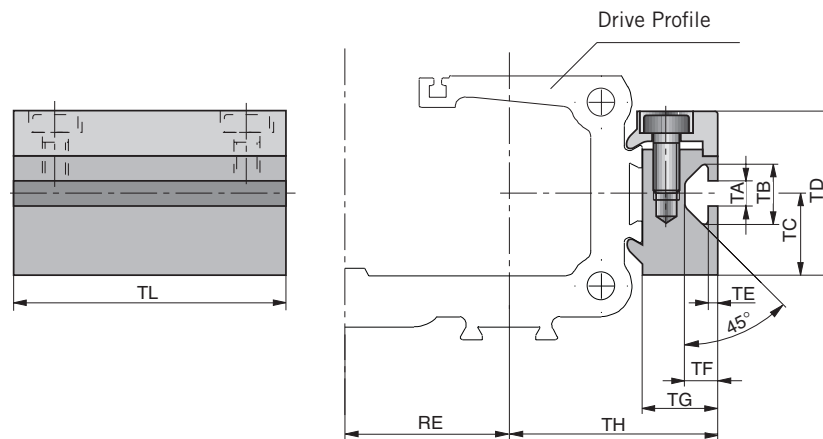

Dimension Table [mm] and Order Instructions

Series	RE	TA	TB	TC	TD	TE	TF	TG	TH	TL	Order No.	
											Standard	Stainless
OSP-E20	23	5	11.5	16	32	1.8	6.4	14.5	28	50	20007	20187
OSP-E25	26	5	11.5	16	32	1.8	6.4	14.5	34.5	50	20007	20187
OSP-E32	32	5	11.5	16	32	1.8	6.4	14.5	40.5	50	20007	20187
OSP-E50	44	8,2	20	20	43	4.5	12.3	20	58	80	20026	20268




Adaptor Profile

Size 25, 32, 50



- to connect
- Series OSP-E with system profiles
 - Series OSP-E with Series OSP-E or OSP-P

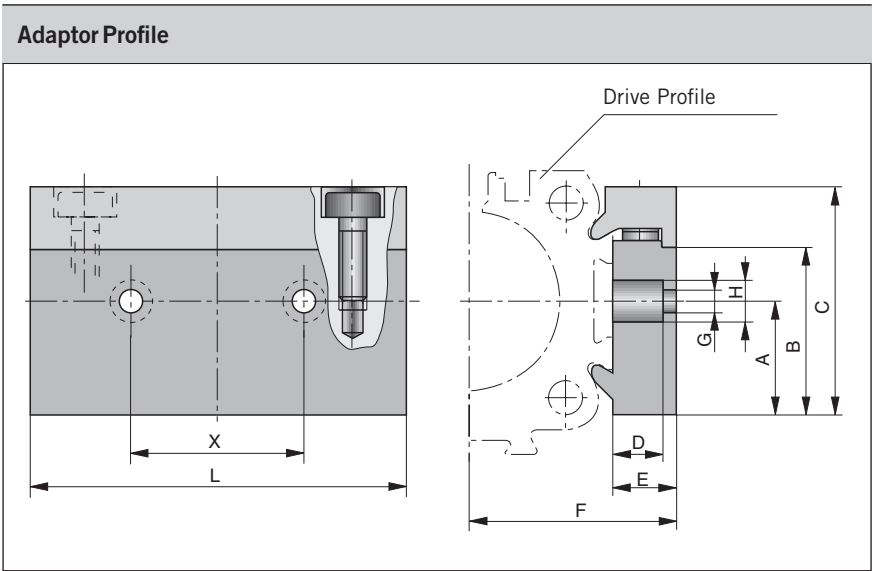

Dimension Table [mm] and Order Instructions

Series	for the connection to the driver of	A	B	C	D	E	F	G	H	L	X	Order No.
OSP-E25	OSP32-50	16	23	32	8.5	10.5	30.5	6.6	11	60	27	20850
OSP-E32	OSP32-50	16	23	32	8.5	10.5	36.5	6.6	11	60	27	20850
OSP-E50	OSP32-50	20	33	43	8	14	52	6.6	11	60	27	20851

The mountings are supplied singly.


Connecting possibilities

Connection of series OSP-E with system profiles

Connection of series OSP-E with series OSP-E/OSP-P



Series OSP-E25SBR, 25STR to 50SBR, 50STR: Type EN-..

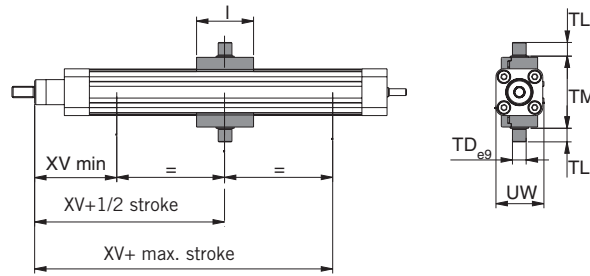

Material: Aluminium

Dimension Table [mm] and Order Instructions – for Trunnion Mounting EN-..

Series	Type	I	ø TD e9	TL	TM	UW	XV min	XV+ 1/2Stroke	XV+ max.Stroke	Order No.
OSP-E25SBR, STR	EN-E25	50	12	12	63	42	73	83	62	12235
OSP-E32SBR, STR	EN-E32	50	16	16	75	52	76.5	90	69.5	12236
OSP-E50SBR, STR	EN-E50	80	20	20	108	87	110	110	84	12237

Trunnion Mounting EN

Pivot Mounting EL

Size 25, 32, 50


OSP
— ORIGA
— SYSTEM
— PLUS

- Series OSP-E..SBR, ..STR
For Linear Drive
with spindle drive and piston rod

The trunnion mounting is fitted to the dovetail rails of the actuator profile and is continuously adjustable in axial direction.

The mountings are supplied in pairs.

Series OSP-E25SBR, 25STR to 50SBR, 50STR: Type EL-..

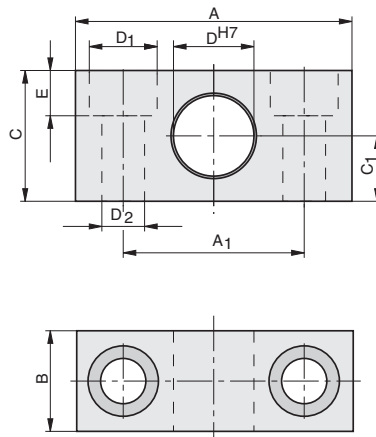

Material: Aluminium

Dimension Table [mm] and Order Instructions – for Pivot Mounting EL-..

Series	Type	A	A ₁	B	C	C ₁	øD ^{H7}	øD ₁	øD ₂	E	Weight (mass) (kg)	Order No.
OSP-E25SBR, STR	EL-032	55	36	20	26	13	12	13.5	8.4	9	0.06	PD23381
OSP-E32SBR, STR	EL-040/050	55	36	20	26	13	16	13.5	8.4	9	0.06	PD23382
OSP-E50SBR, STR	EL-063/080	65	42	25	30	15	20	16.5	10.5	11	0.10	PD23383

Trunnion Mounting EN



Pivot Mounting EL



Clevis Mounting

Size 25, 32, 50



- Series OSP-E..B
For Linear Drives with Belt
- Series OSP-E...SB, ..ST
For Linear Drives with Screw

When external guides are used, parallelism deviations can lead to mechanical strain on the piston. This can be avoided by the use of a clevis mounting.


Freedom of movement is provided as follows:

- Tilting in direction of movement
- Vertical compensation
- Tilting sideways
- Horizontal compensation

A stainless steel version is also available.


Series OSP-E25 to E32

OSP-E..B, ..SB, ..ST

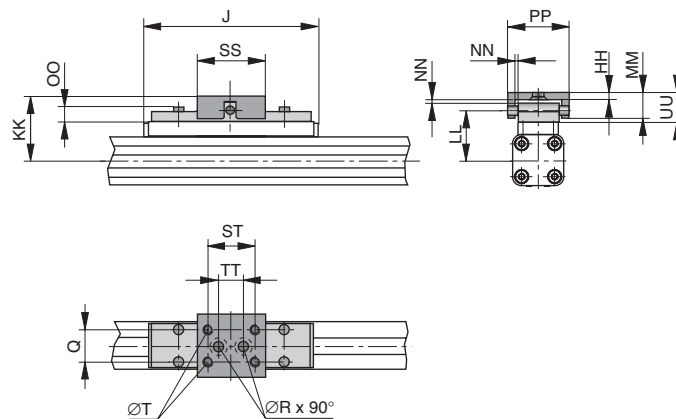

Series OSP-E50



OSP-E..B, ..SB, ..ST

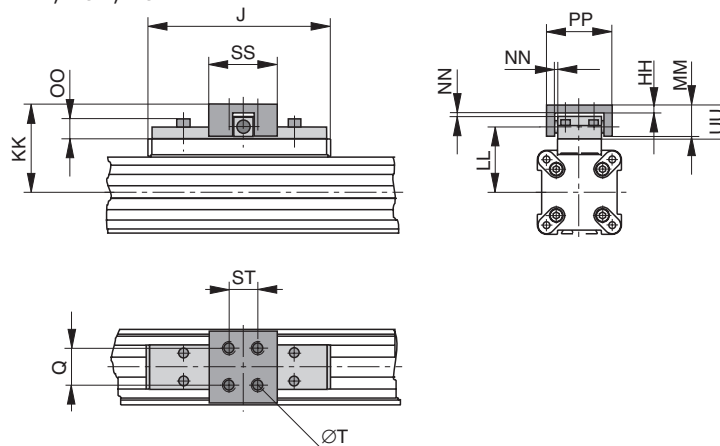

Dimension Table [mm] and Order Instructions

Series	J	Q	T	øR	HH	KK	LL	MM	NN*	OO	PP	SS	ST	TT	UU	Order No.	
																Standard	Stainless
OSP-E25	117	16	M5	5.5	3.5	52	39	19	2	9	38	40	30	16	21	20005	20092
OSP-E32	152	25	M6	6.6	6	68	50	28	2	13	62	60	46	40	30	20096	20094
OSP-E50	200	25	M6	–	6	79	61	28	2	13	62	60	46	–	30	20097	20095

* Dimension NN gives the possible plus and minus play in horizontal and vertical movement, which also makes tilting sideways possible.

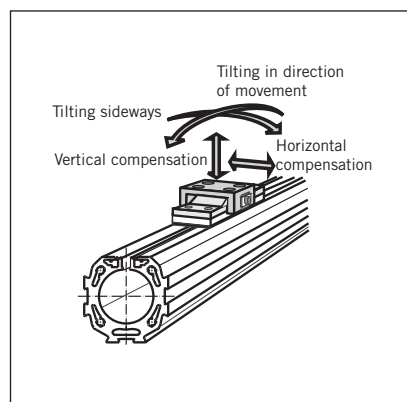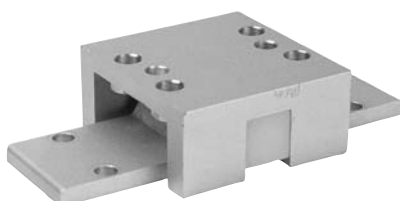


Please note:

When using additional inversion mountings, take into account the dimensions in data sheet 1.45.025E.


Series OSP-E25 to E32

OSP-E..B, ..SB, ..ST

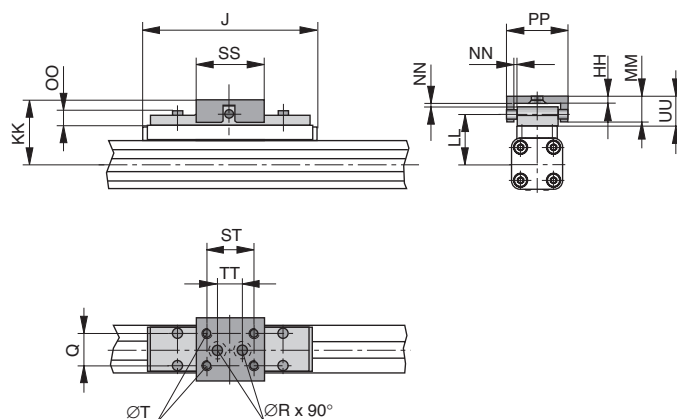

Series OSP-E50

OSP-E..B, ..SB, ..ST

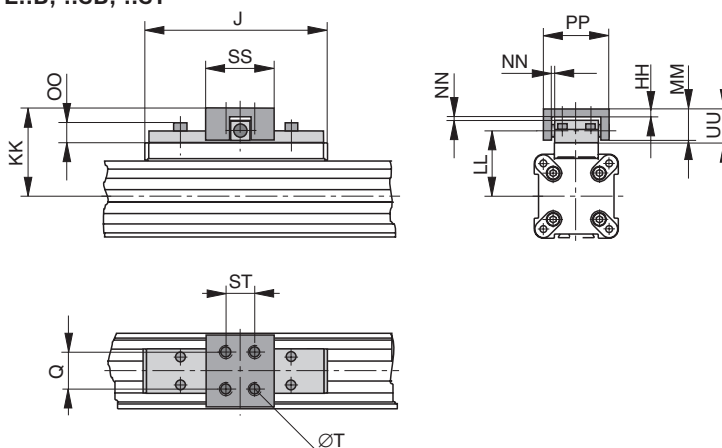

Clevis Mounting, low back lash

Size 25, 32, 50

OSP
— ORIGA
— SYSTEM
— PLUS

- **Series OSP-E..B**
Linear Drives with Belt
- **Series OSP-E..SB, ..ST**
Linear Drives with Screw

When external guides are used, parallelism deviations can lead to mechanical strain on the piston. This can be avoided by the use of a clevis mounting.

In the drive direction the clevis mounting has a low backlash fit.

Freedom of movement is provided as follows:

- **Tilting in direction of movement**
- **Vertical compensation**
- **Tilting sideways**
- **Horizontal compensation**

A stainless steel version is also available.


Dimension Table [mm] and Order Instructions

Series	J	Q	T	ØR	HH	KK	LL	MM	NN*	OO	PP	SS	ST	TT	UU	Order No.	
																Standard	Stainless
OSP-E25	117	16	M5	5.5	3.5	52	39	19	2	9	49	40	30	16	21	20496	20498
OSP-E32	152	25	M6	6.6	6	68	50	28	2	13	69	60	46	40	30	20497	20499
OSP-E50	200	25	M6	—	6	79	61	28	2	13	69	60	46	—	30	20812	20818

* Dimension NN gives the possible plus and minus play in horizontal and vertical movement, which also makes tilting sideways possible

Please note:

When using additional inversion mountings, take into account the dimensions in data sheet 1.45.025E

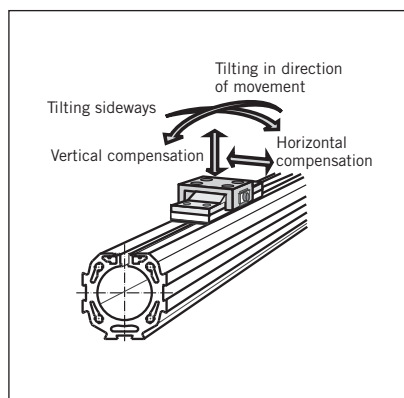

Inversion Mounting

Size 25, 32, 50





- Series OSP-E..B
For Linear Drive with Belt
- Series OSP-E-..SB, ..ST
For Linear Drive with Screw

In dirty environments, or where there are special space problems, inversion of the cylinder is recommended. The inversion bracket transfers the driving force to the opposite side of the cylinder. The size and position of the mounting holes are the same as on the standard cylinder

Stainless steel version on request.

Please note:
Other components of the OSP system such as **mid-section supports**, **magnetic** switches can still be mounted on the free side of the cylinder.


Important Note:
May be used in combination with **Clevis Mounting**, ref. dimensions in data sheet 1.44.010E-13, -14

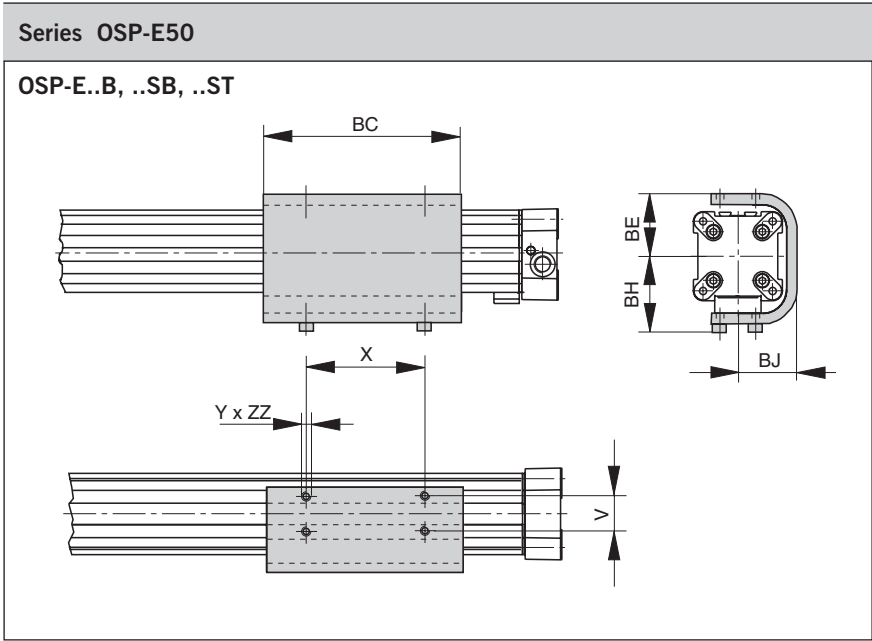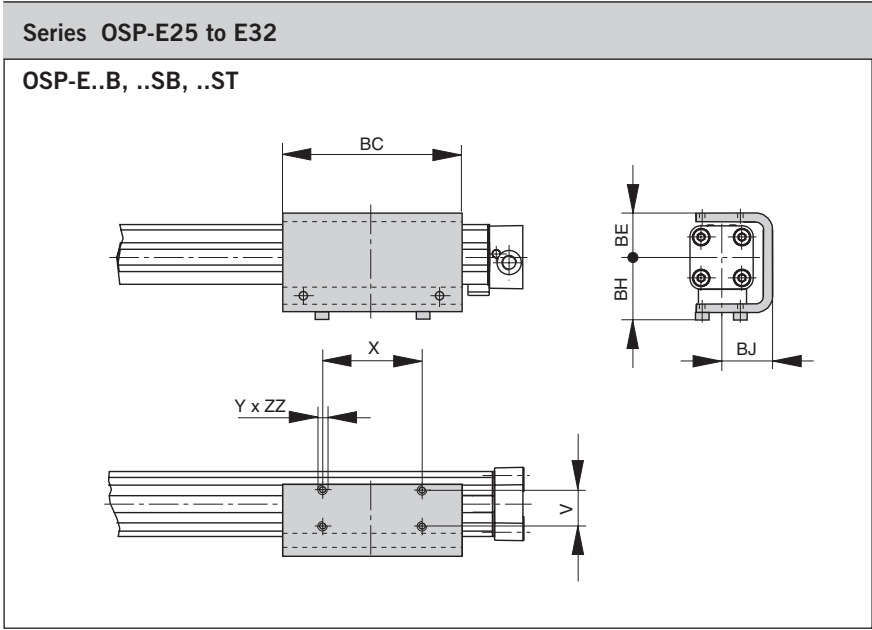

Dimension Table (mm) and Order Instructions									
Series	V	X	Y	BC	BE	BH	BJ	ZZ	Order No.
OSP-E25	25	65	M5	117	31	43	33.5	6	20037
OSP-E32	27	90	M6	150	38	51	39.5	6	20161
OSP-E50	27	110	M6	200	55	65	52	8	20166

Accessories for Electric Linear Drives Series OSP-E

Mountings for Linear drive with guide

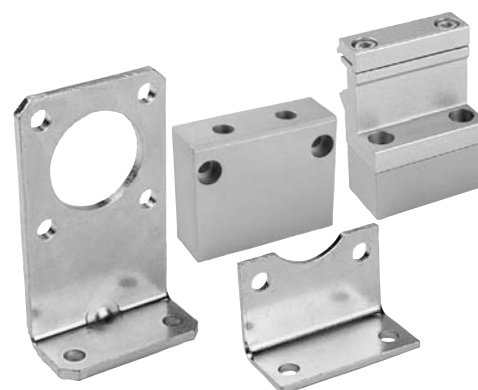

Contents

Description	Data Sheet	Page
Overview mountings/guides	1.44.014E-2	144
End Cap Mounting	1.44.014E-3	145
Mid-Section Support	1.44.014E-4	146

A1P743E00FAG00X


The right to introduce technical
modifications is reserved

Overview

Mountings for Linear Drives with OSP-Guides



- Series OSP-E..B
Linear Drive with Belt
- Series OSP-E..SB, ..ST
Linear Drive with Screw *

Overview											
Type of mounting des Zylinders	Type	Versions – OSP-guide									
		SLIDELINE PROLINE MULTIBRAKE			POWERSLIDE						
		25	32	50	25/ 25	25/ 35	25/ 44	32/ 35	32/ 44	50/ 60	50/ 76
End Cap Mounting 	Type A1										
	Type A2	O	O								
	Type A3				O	O		O			
End Cap Mounting reinforced 	Type B1	X	X		X	X	X	X	X		
	Type B3										
	Type B4						O		O		
End Cap Mounting 	Type C1			X						X	X
	Type C2			O							
	Type C3									O	
	Type C4										O
Mid-Section Support narrow Mid-Section Support wide 	Type D1	X	X	X	X	X	X	X	X	X	X
	Type E1	X	X	X	X	X	X	X	X	X	X
	Type E2	O	O	O							
	Type E3				O	O		O		O	
	Type E4						O		O		O


X = mounting position carriage top
(12 clock position)

O = mounting position carriage side
(3 or 9 clock position)

 = available components


* Please note:

With series OSP-E-Spindle the end cap mountings A, B and C can only be fitted to the side opposite to the drive shaft. On the side of the drive shaft we recommend to use our mid-section supports (data sheet 1.44.014E-4).

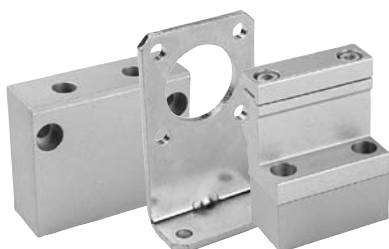

Series OSP – E25, E32: Type A

OSP-E..B, ..SB, ..ST

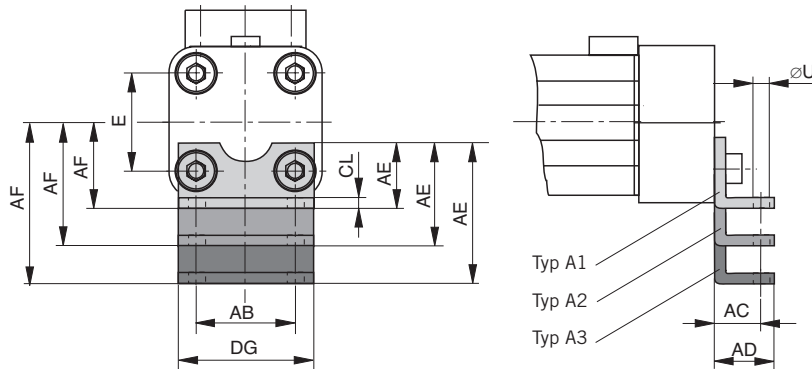

End Cap Mounting *


At the end face of each end caps there are four holes with internal threads to fix the drive. The hole layout is square so that the drive can be fitted on the bottom, the top or either side.

Material: series OSP-25, 32:
steel, zinc galvanized
series OSP-50:
aluminium, anodized

The mountings are supplied in pairs.

Series OSP – E25, E32: Type B


OSP-E..B, ..SB, ..ST

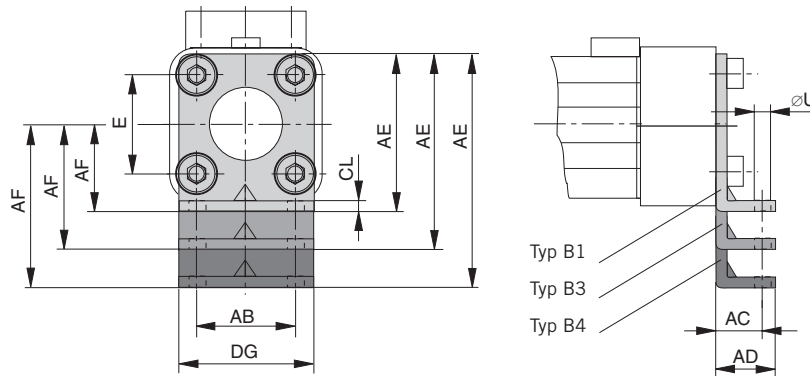

Dimension Table [mm]
– Dimension AE and AF (Depending on type of mounting)

Type of mount.	Dimension AE at size			AF at size		
	25	32	50	25	32	50
A1	18	20	–	22	30	–
A2	33	34	–	37	44	–
A3	45	42	–	49	52	–
B1	42	55	–	22	30	–
B3	–	–	–	–	–	–
B4	80	85	–	60	60	–
C1	–	–	30	–	–	48
C2	–	–	39	–	–	57
C3	–	–	54	–	–	72
C4	–	–	77	–	–	95

Series OSP – E50: Type C

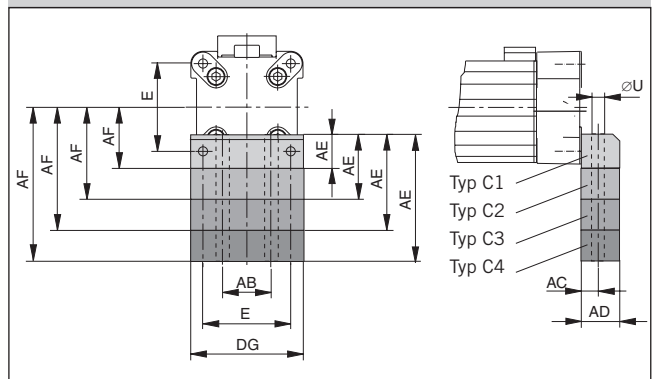

Dimension Table [mm]

Series	E	øU	AB	AC	AD	CL	D
OSP-E25	27	5.8	27	16	22	2.5	39
OSP-E32	36	6.6	36	18	26	3	50
OSP-E50	70	9	40	12.5	24	–	86

* see survey for mounting types on page 1.44.014E-2

Mid Section Support

Information on type E1 and D1:

The mid-section supports can also be fitted to the bottom side of the drive. In this case please observe the new centre line dimensions of the drive.

For layout information please refer to the data sheet 1.40.021-2, 1.40.022-3, 1.40.024-3

Stainless version on request.



Dimension Table [mm]
– Dimension DR and AF (Depending on type of mounting)

Type of mount.	Dimensions DR at size			AF at size		
	25	32	50	25	32	50
D1	–	–	–	22	30	48
E1	8	10	10	22	30	48
E2	23	24	19	37	44	57
E3	35	32	31	49	52	72
E4	46	40	57	60	60	95

Dimension Table [mm]

Series	R	U	UU	DE	DF	DH	DK	DM	DN	DO	DP	DQ	DS	DT	EF	EM	EN	EQ
OSP-E25	M5	5.5	10	16	27	38	26	40	47.5	36	50	34.5	5.7	10	41.5	28.5	49	36
OSP-E32	M5	5.5	10	16	33	46	27	46	54.5	36	50	40.5	5.7	10	48.5	35.5	57	43
OSP-E50	M6	7	–	23	40	71	34	59	67	45	60	52	–	11	64	45	72	57

Order Instructions for Mountings Type A – Type B – Type C – Type D – Type E


Type of mounting (Versions)	Order No. Size		
	25	32	50
A1 *1)	2010	3010	–
A2 *1)	2040	3040	–
A3 *1)	2060	3060	–
B1 *1)	20311	20313	–
B3 *1)	–	–	–
B4 *1)	20312	20314	–
C1 *1)	–	–	5010
C2 *1)	–	–	20349
C3 *1)	–	–	20350
C4 *1)	–	–	20351
D1 *2)	20008	20157	20162
E1 *2)	20009	20158	20163
E2 *2)	20352	20355	20361
E3 *2)	20353	20356	20362
E4 *2)	20354	20357	20363

*1) The mountings are supplied in pairs

*2) The mountings are supplied simply


Series OSP-E25, E32, E50: Type E. (Mounting with through hole)

OSP-E..B, ..SB, ..ST, ..SBR, ..STR

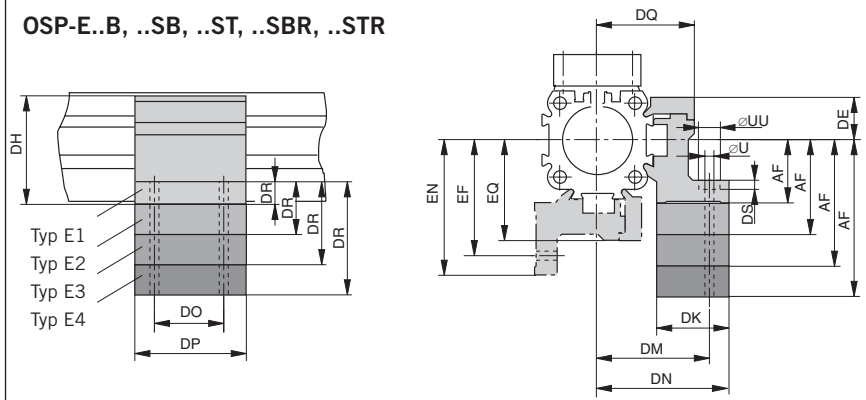

Series OSP-E25, E32, E50: Type D1 (Mounting with internal thread)

OSP-E..B, ..SB, ..ST, ..SBR, ..STR

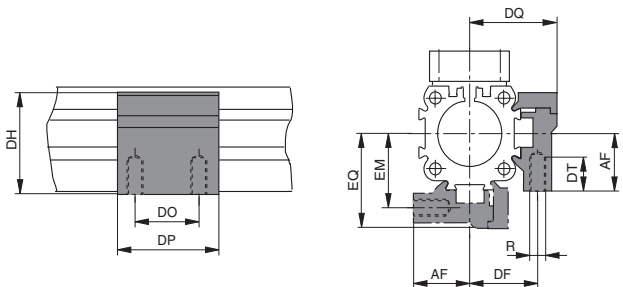

Accessories for Linear Drives Series OSP-E

Piston Rod Knuckle



Contents

Description	Data Sheet	Page
Piston Rod Eye according to ISO 8139	1.44.018E-2	148
Piston Rod Clevis according to ISO 8140	1.44.018E-2	148
Piston rod Compensating Coupling	1.44.018E-3	149

A1P744E 00FAG00X

The right to introduce technical
modification is reserved


Piston Rod Eye according to ISO 8139

OSP
— ORIGA
— SYSTEM
— PLUS

- Series OSP-E..SBR, ..STR
Linear Drive with Screw
and Piston Rod



Piston Rod Eye according to ISO 8139 (CETOP RP103 P)
Type: GA-..

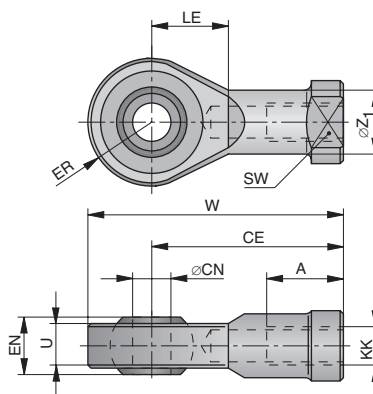


Order Instructions, Dimension Table [mm], Weight

Series	Type	A	CE	EN	ER	KK	LE	SW	U	W	EN	Weight [kg]	Order No.
OSP-E25SBR, STR	GA-M10x1.25	20	43	10	14	14	M10x1.25	15	17	10.5	57	0.072	KY6147
OSP-E32SBR, STR	GA-M10x1.25	20	43	10	14	14	M10x1.25	15	17	10.5	57	0.072	KY6147
OSP-E50SBR, STR	GA-M16x1.5	28	64	16	21	21	M16x1.5	22	22	15	85	0.21	KY6150


Piston Rod Clevis according to ISO 8140

OSP
— ORIGA
— SYSTEM

- Series OSP-E..SBR, ..STR
Linear Drive with Screw
and Piston Rod





Piston Rod Clevis according to ISO 8140 (CETOP RP102P)
Type: GK-..

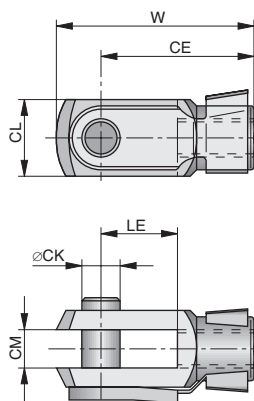

Order Instructions, Dimension Table [mm], Weight


Series	Type	EN	CE	CL	CM	KK	LE	W	Weight[kg]	Order No.
OSP-E25SBR, STR	GK-M10x1.25	10	40	20	10	M10x1.25	20	52	0.08	KY6135
OSP-E32SBR, STR	GK-M10x1.25	10	40	20	10	M10x1.25	20	52	0.08	KY6135
OSP-E50SBR, STR	GK-M16x1.5	16	64	32	16	M16x1.5	32	83	0.30	KY6139

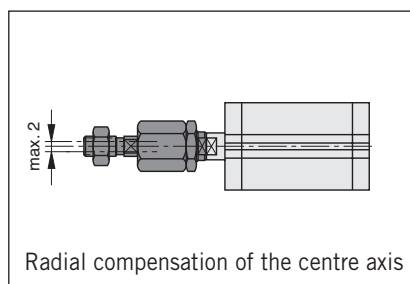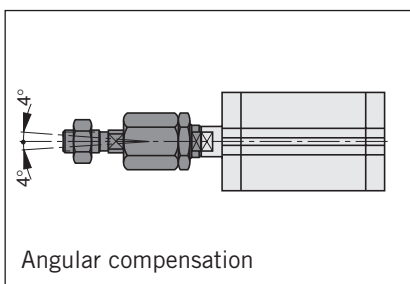

Piston Rod Compensating Coupling

OSP
— ORIGA
— SYSTEM
— PLUS


- Series OSP-E..SBR, ..STR
Linear Drive with Screw
and Piston Rod

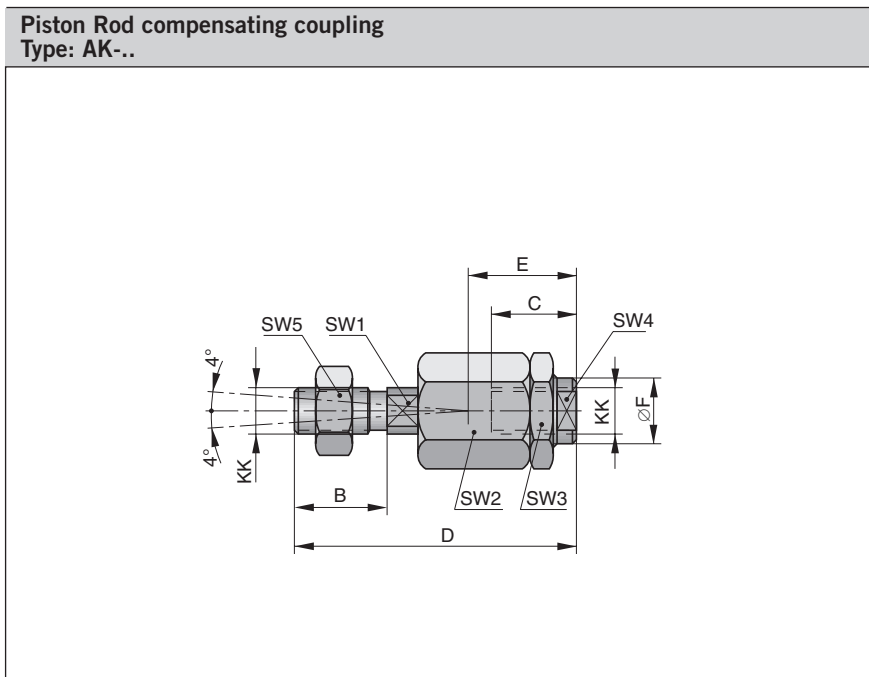

Order Instructions, Dimension Table [mm], Weight															
Series	Type	B	C	D ±2	E	ØF	KK	SW1	SW2	SW3	SW4	SW5	Weight [kg]	Order No.	
OSP-E25SBR, STR	AK-M 10x1.25	20	23	73	31	21,5	M10x1.25	12	30	30	19	17	0.218	KY 1129	
OSP-E32SBR, STR	AK-M 10x1.25	20	23	73	31	21,5	M10x1.25	12	30	30	19	17	0.218	KY 1129	
OSP-E50SBR, STR	AK-M 16x1.5	40	32	108	45	33,5	M16x1.5	19	41	41	30	30	0.637	KY 1133	

Accessories for Electric Linear Drives Series OSP-E

Magnetic Switches SFI-plus Displacement Measuring System

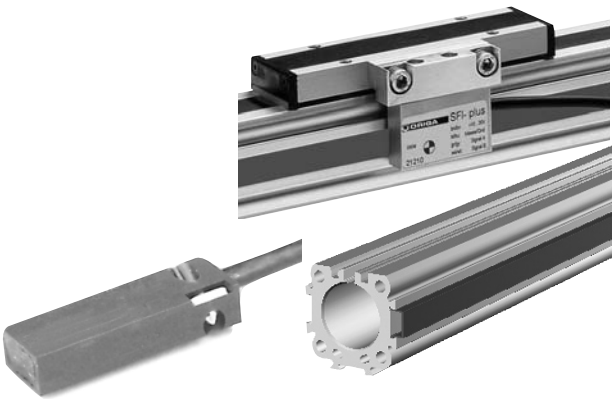

Contents

Description	Data Sheet	Page
Magnetic Switches Types RS, ES	1.44.030E-2, -3, -4	153-155
SFI-plus Displacement Measuring System	1.44.035E-2, -3, -4	157-159
Cable Cover	1.44.040E-1	161

A1P752E00FAG00X

The right to introduce technical
modifications is reserved

Characteristics				
Characteristics		Symbol	Unit	Description
Electrical Characteristics		Type RS		Type ES
Operating voltage	U_B	V	10-240 AC/DC (NO) 10-150 AC/DC (NC) 10-70 AC/DC (NO/NC)**	10-30 DC
Connection			Two wire	Three wire
Switching function			Normally open (NO) Normally closed (NC)	NPN (NO) PNP (NC)
Max. permanent switching current	I_{Dmax}	mA	200	200
Max. switching capacity		VA (W)	10 VA	—
Residual voltage at I_{Lmax}		V	< 3	< 3
Max. current consumption		mA	—	< 20
Status indicator			LED, yellow	
Typical switching time		ms	On: < 2	On: < 2
Switch-off delay		ms	—	approx. 25
Pole reversal			LED without function	—
Pole reversal protection			—	built in
Short circuit protection			—	built in
Switchable capacity		μF	0.1 at 100 Ω , 24 VDC	
Switching distance		mm	approx. 15	approx. 15
Hysteresis for OSP		mm	approx. 8	approx. 3
Mechanical Characteristics				
Housing			MacroLon, grey	
Insulation class			F to VDE 0580	
Connection*) Type RS-K Type RS-S			Cable, 5 m long	3-pole Connector M8, Cable length ca. 100mm**
			3-pole Connector M8, Cable length ca. 100mm**	
Cable cross section (highly flexible)		mm ²	2 x 0.14	3 x 0.14
Cable (highly flexible *)			PVC	PUR, black
Wire colours			brown AC/DC+ blue or white signal output	Pin 1 = +, brown Pin 3 = 0V, blue Pin 4 = Signal black or white
Minimum permissible bending radius of cable	fixed	mm	≥ 20	
	moving	mm	≥ 70	
Switching point accuracy		mm	± 0.2	
Temperature range *) 1)	ϑ_{min} ϑ_{max}	°C °C	-25 other temperature ranges +80 on request	
Service life, switching cycles			3 x 10 ⁶ up to 6 x 10 ⁶	theoretically unlimited
Electrical protection		IP	67 according to DIN EN 60529	
Shock resistance			m/s ² (contact switches)	100 500
Weight (mass)		kg	0.12	

*) other versions on request

**) RS with connector (RS-S)

1) for the magnetic switch temperature range, please take into account the surface temperature and the self-heating properties of the linear drive.

Magnetic Switches



Type RS-

Type ES-


For electrical sensing of the carrier position, e.g. at the end positions, magnetic switches may be fitted. The magnetic switches can as well be used as cut-out switches for a lot of intermediate positions.

Position sensing is contactless and is based on magnets fitted as standard to the carrier. A yellow LED indicates operating status.

Piston speed and switching distance affect signal duration and should be considered in conjunction with the minimum reaction time of ancillary control equipment.

In accordance to this, the contact travel must be included in the calculation.

$$\text{Min. reaction time} = \frac{\text{Switching distance}}{\text{Piston speed}}$$



Magnetic Switches RS and ES

Electrical Service Life Protective Measures


Type RS magnetic switches are sensitive to excessive currents and inductions. With high switching frequencies and inductive loads such as relays, solenoid valves or lifting magnets, service life will be greatly reduced.

With **resistive** and **capacitive** loads with high switch-on current, such as light bulbs, a protective resistor should be fitted. This also applies to long cable lengths and voltages over 100 V.

In the switching of inductive loads such as relays, solenoid valves and lifting magnets, voltage peaks (transients) are generated which must be suppressed by protective diodes, RC loops or varistors.

Connection Examples

- Load with protective circuits
- (a) Protective resistor for light bulb
 - (b) Freewheel diode on inductivity
 - (c) Varistor on inductivity
 - (d) RC element on inductivity



For the type ES, external protective circuits are not normally needed.


Type RS

In the type RS contact is made by a mechanical reed switch encapsulated in glass.

Type ES



In the type ES contact is made by an electronic switch – without bounce or wear and protected from pole reversal. The output is short circuit proof and insensitive to shocks and vibrations.

Dimensions [mm] – Type RS-K

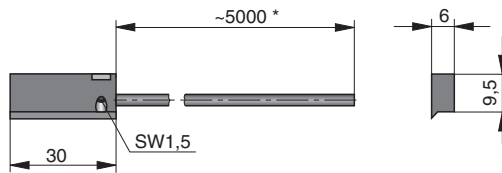

* Length with possible minus tolerance, see chart below

Dimensions [mm] – Type ES-S / RS-S**

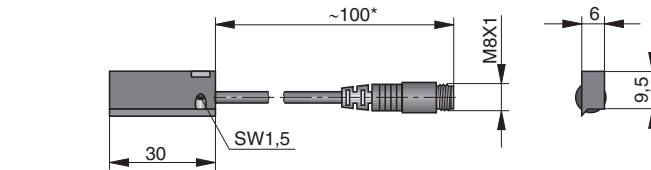

** Length with possible minus tolerance, see table below

**Operating voltage max. 70 V


Length of connection cable with length tolerance

Sensor Order No.	Nominal cable length	max. Length tolerance
KL3087	100 mm	– 20 mm
KL3047	100 mm	– 20 mm
KL3054	100 mm	– 20 mm
KL3060	145 mm	± 5 mm
KL3048	5000 mm	– 50 mm
KL3045	5000 mm	– 50 mm

Electrical Connection Type RS




Electrical Connection Type ES

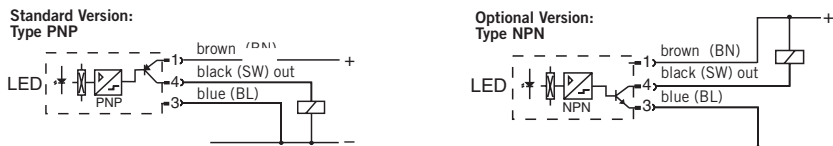


Positioning of Magnetic Sensors/Permanent Magnets — OSP-E..BHD

Standard Version




Drive Shaft Option = 0




Drive Shaft Option = 1

Bi-Parting Version




Drive Shaft Option = 2




Drive Shaft Option = 3

When arranging the magnetic switches, please mind the position of the magnets integrated in the carrier as a function of the operating direction.
„M“ indicates where magnet is fitted in carrier.

Dimensions for magnetic switch set Series OSP-E..BV

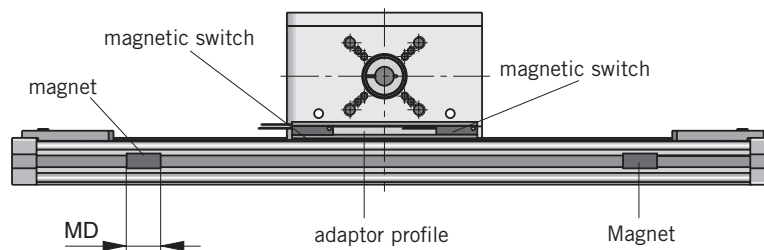

The magnetic switch as well as the magnet can be fitted to either side

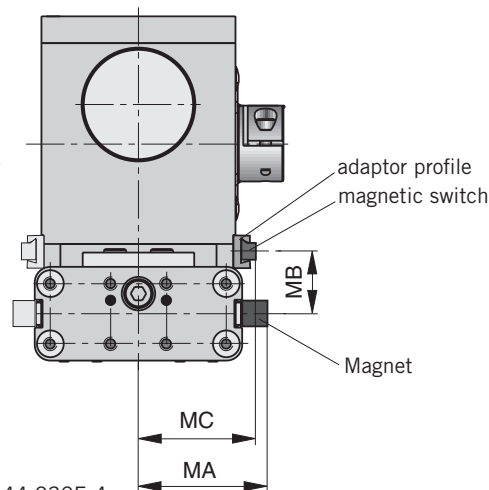


Dimensions see data sheet 1.44.030E-4

Magnetic switch and magnet are externally fitted to the OSP-E..BV.


For this purpose please order the magnetic switch set (consisting of 2 magnetic switches, 1 fastening rail and 2 magnets) for contactless position sensing.

Dimensions

OSP-E..BHD

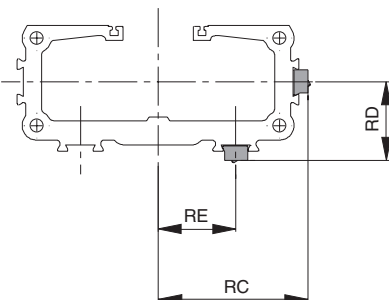






OSP-E..B, ..SB, ..ST, ..SBR, ..STR

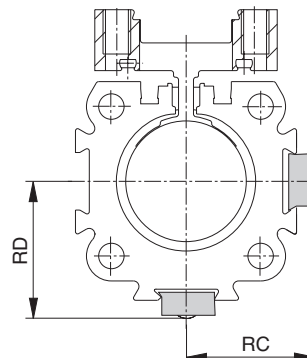

Dimension Table (mm)

Series	Dimension						
	RC	RD	RE	MA	MB	MC	MD
OSP-E20BHD	41.5	26.6	23	–	–	–	–
OSP-E25BHD	51	27	26	–	–	–	–
OSP-E32BHD	63	34	32	–	–	–	–
OSP-E50BHD	87	48	34	–	–	–	–
OSP-E20BV	–	–	–	46	23.7	42.3	35
OSP-E25BV	–	–	–	56	26	51	35
OSP-E25*	25	27	–	–	–	–	–
OSP-E32*	31	34	–	–	–	–	–
OSP-E50*	43	48	–	–	–	–	–
* = ..B, ..SB, ..ST, ..SBR, ..STR							

Order Instructions

Description	Function	Series	Cable Length [mm]	Type	Order No.
Magnetic switches, Reed contact, with M8-Connector PIN 3 neutral (ES-S compatible connector)	NC 	all*	100	RS-S	KL3087
	NO 	all*	100	RS-S	KL3047
Magnetic switches, Reed contact, with cable	NC 	all*	5000	RS-K	KL3048
	NO 	all*	5000	RS-K	KL3045
	NC 	OSP-E..STR	5000	RS-K	KL3096
Magnetic switches, electronic with M8-connector	NPN (NO) 	all*	100	ES-S	KL 3060
	PNP (NC) 	all*	100	ES-S	KL 3054
	PNP (NC) 	OSP-E..STR	100	ES-S	KL 3098
Magnetic switch set **	NC 	OSP-E..BV	2 x 100	RS-S	15886
Connecting cable					
suitable for cable chain			5000		KL3186
suitable for cable chain			10000		KL3217
suitable for cable chain			15000		KL3216
standard			5000		4041
standard			10000		KL9074

* = except for OSP-E..STR

** = consisting of 2 magnetic switches KL 3087, 1 fastening rail, 2 magnets

Characteristics		
Characteristics	Unit	Description
Type		21210
Output function		
Resolution	mm	0.1
Pole length scale	mm	5
Max. speed	m/s	10
Repeating accuracy		± 1 increment
Distance sensor/scale mm		≤ 4
Tangential deviation	≤ 5°	
Possible lateral deviation	mm	≤ ± 1.5
Switching output		PNP
Electrical Characteristics		
Operating voltage U_b	V DC	18 – 30
Voltage drop	V	≤ 2
Continuous current per output	mA	≤ 20
Power consumption at $U_b = 24V$, switched on, no-load	mA	≤ 50
Short-circuit protection		yes
Reverse voltage protection		yes
Protection against inductive switch-off peak		yes
Power-up pulse suppression		yes
EMC		
Electrostatic discharge	kV	6, B, according to EN 61000-4-2
Electromagnetic field	V/m	10, A, according to EN 61000-4-3
Fast transients signals, burst (signal connections)	kV	1, B, according to EN 61000-4-4
Fast transients signals, burst (DC-connections)	kV	2, B, according to EN 61000-4-4
EMC immunity, surge (signal-connections)	kV	1, B, according to EN 61000-4-5
EMC immunity, surge (DC-connections)	kV	0,5, B, according to EN 61000-4-5
HF cable fed	V	10, A, according to EN 61000-4-6
Magnetic field at 50 Hz	A/m	30, A, according to EN 61000-4-8
Radio frequency interference		according to EN 61000-6-4
Radiated disturbances		according to EN 55011, group 1, A
Mechanical parameters		
Housing		Aluminium
Cable length	m	5.0 – fixed, open end
Cable cross-section	mm ²	4 x 0.14
Type of cable		PUR, black
Bending radius	mm	≥ 36
Weight (mass)	kg	approx. 0.165
Ambient conditions/shock resistance		
Encapsulation class	IP	67 according to EN60529
Ambient temperature range		°C -25 to +80
Broad band noise according to EN 60068-2-64	g	5.5 Hz to 2 kHz, 0.5 h per axis
Vibration according to EN 60068-2-6	g	12, 10 Hz to 2 kHz, 2 mm, 5 h per axis
Shock acc. EN 60068-2-27	g	100, 6 ms, 50 shocks per axis
Continuous shock according to EN 60068-2-29	g	5, 2 ms, 8000 shocks per axis

Displacement Measuring System

for automated movement

ORIGA-Sensoflex

(Incremental Displacement
Measuring System)

Series SFI-plus

- **Series OSP-E..SB**
Linear Drive with ball screw
- **Series OSP-E..ST**
Linear Drive with trapezoidal screw

Special properties:

- contactless, magnetic displacement measuring system
- freely selectable displacement length up to 32 m
- resolution 0,1 mm
- displacement speed up to 10 m/s
- suited for linear and gyratory movements
- for almost all control and display units with suitable counter input

The magnetic displacement measuring system SFI-plus consists of 2 main components:


- **Measuring scale**
self-adhesive, magnetic measuring scale
- **Sensing head**
converts the magnetic poles into electric signals which are then processed by counter inputs downstream (e.g. PLC, PC, digital counters)



Sensing head

The sensing head supplies two pulsating, 90° out of phase counter signals (phase A/B) with a resolution of 0,4 mm (option 4 mm). External pulse edge control can improve the resolution to 0.1.mm (option 1 mm). The counting direction automatically results from the phase shift of the counter signal.

Dimensions [mm] – Reading Head

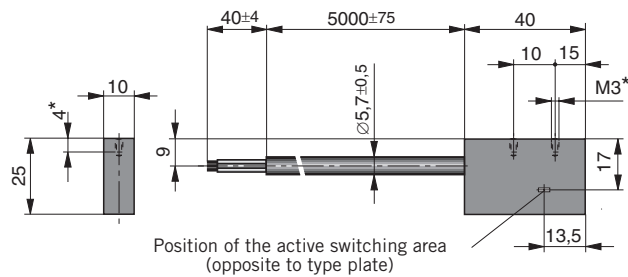


* Max. thread depth 4mm

Electric connection

colour	Designation
bn = brown	+ DC
bl = blue	– DC
bk = black	phase A
wt = white	phase B

Signal curve – sensing head OUT

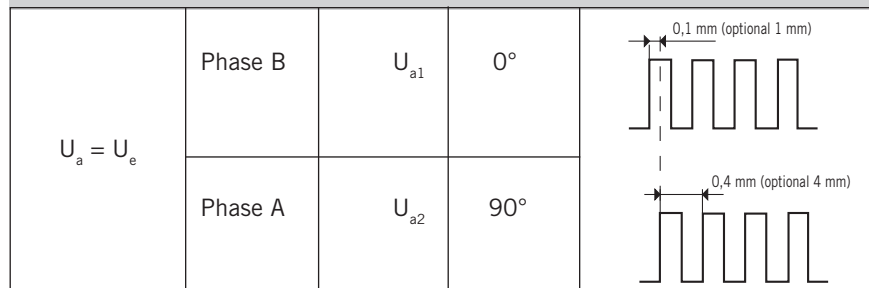

SFI-plus in connection with electric linear drives of series OSP-E..ST

The SFI-plus can be mounted directly to the electric linear drive of series OSP-E..ST by means of a special mounting kit. The position of the sensing head is generally staggered by 90° to the carrier.




For later installation a corresponding carrier kit with threaded holes can be ordered.

SFI-plus in connection with electric linear drives of series OSP-E..SB

The displacement measuring system in connection with series OSP-E..SB can only be retrofitted, if the system is reconditioned by the manufacturer.

Dimensions – in combination with OSP-E linear drives

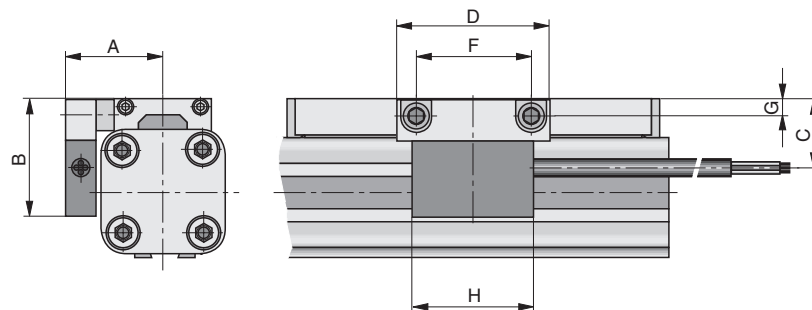

Dimension Table [mm]

Series	A	B	C	D	F	G	H
OSP-E25SB, ST	32	39	23	50	38	5.5	40
OSP-E32SB, ST	37.5	46	30	50	38	6.5	40
OSP-E50SB, ST	49.5	55	39	50	38	6.5	40

Order Instructions	
Description	Order No.
Sensing head with measuring scale – resolution 0.1 mm (please indicate scale length)	21240
Sensing head - resolution 0.1 mm (spare part)	21210
Measuring scale per meter for (to be replaced)	21235
Mounting kit for OSP-P25	21213
Mounting kit for für OSP-P32	21214
Mounting kit for für OSP-P50	21216

* The overall length of the measuring scale results from the dead length of the linear drive and the stroke length.
For dead lengths for linear drives of series OSP-E see table.


Series	Dead lengths [mm]
OSP-E25SB, ST	154
OSP-E32SB, ST	196
OSP-E50SB, ST	280

Example:


Linear Drive OSP-E, Ø25 mm,
stroke 1000 mm

Dead length + stroke = overall length of the measuring scale
154 mm + 1000 mm = 1154 mm

Series OSP-E..B, ..SB, ..ST, ..SBR, ..STR – Dimensions [mm]

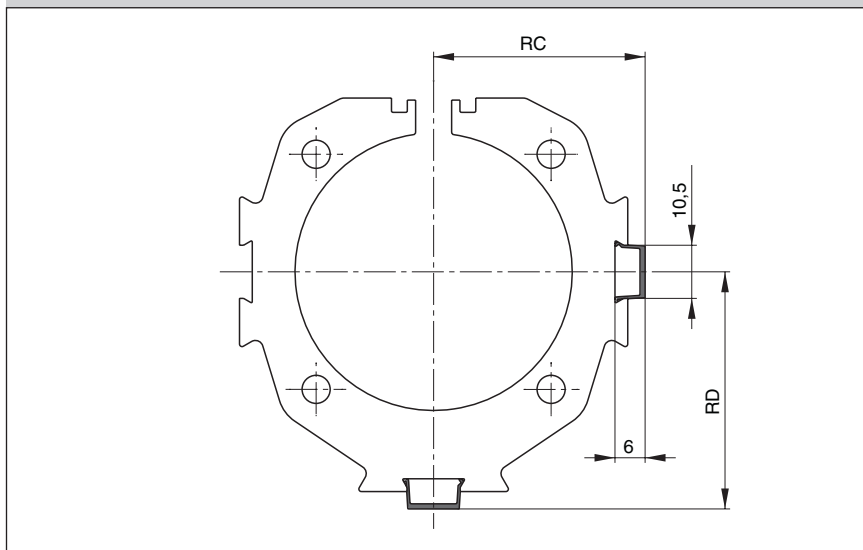

Series OSP-E..BHD – Dimensions [mm]

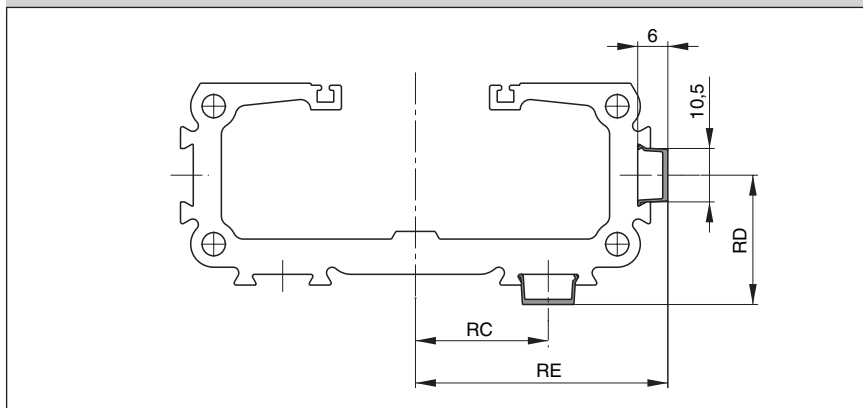

Dimension Table [mm] and Order Instructions

for Series	RC	RD	RE	Order No.
OSP-E25 *	23.5	25.5	–	13039 Minimum length: 1m Max. profile length: 2m Multiple profiles can be used.
OSP-E32 *	29.5	32	–	
OSP-E50 *	41.5	46.5	–	
OSP-E20BHD	23	25	40	
OSP-E25BHD	26	25.5	49.5	
OSP-E32BHD	32	32	61.5	
OSP-E50BHD	44	46.5	85.5	

* B, SB, ST, SBR, STR

Cable Cover

Size 20, 25, 32, 50

OSP
— ORIGA
— SYSTEM
— PLUS


For clean guidance of magnetic switch cables along the cylinder body.

Contains a maximum of 3 cables with diameter 3 mm.

Material: Plastic

Colour: Red

Temperature Range: –10 bis +80°C

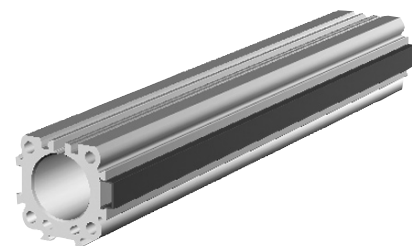

ORIGA

HOERBIGER-ORIGA

... your competent partner with global service and distribution



AE	HOERBIGER SERVICE MIDDLE EAST FZE • Jebel Ali Free • P.O. Box 07153 • Dubai, United Arab Emirates Tel. +971 +4 8814567 • Fax +971 +4 8817123 • e-mail: office@hoerbiger.ae
AT	HOERBIGER-ORIGA Pneumatik GmbH • Dr. Alexander-Schärf-Straße 12 • AT-2700 Wiener Neustadt Tel. +43 +2622 26071-269 • Fax +43 +2622 26071-266 • e-mail: info-hoat-sales.pn@hoerbiger.com
AU	HOERBIGER AUSTRALIA PTY.LTD. • 21 David Street • AU-3175 Dandenong, Victoria Tel. +61 (0)3 9793 9488 • Fax +61 (0)3 9706 8152 • e-mail: info-hoau-sales@hoerbiger.com
CH	HOERBIGER-ORIGA AG • Industriestr. 30 • CH-8112 Otelfingen (Zürich) Tel. +41 (0)1 846 6860 • Fax +41 (0)1 846 6870 • e-mail: info-hoch-sales@hoerbiger.com
CN	HOERBIGER (WUXI) AUTOMATION TECHNOLOGY CO., LTD. • A2-A, Machinery & Electronics Park • Wuxi National High-Tech Zone Wuxi 214028, China • Tel. +86 510 8520 3468 • Fax +86 510 8520 3498 • e-mail: info-wuxi@hoerbiger.com
DE	HOERBIGER-ORIGA GmbH • Industriestr. 8 • DE-70794 Filderstadt Tel. +49 (0)7158 1703-0 • Fax +49 (0)7158 64870 • e-mail: info-hode-sales@hoerbiger.com
ES	HOERBIGER-ORIGA S.A. • Pol. Ind. El Nogal • c/Nogal 8 • ES-28110 Algete (Madrid) Tel. +34 91 629 09 00 • Fax +34 91 629 24 08 • e-mail: origa@hoerbigeroriga.es
FR	HOERBIGER-ORIGA S.A. • 11 avenue de Norvège • FR-91978 Courtaboeuf Tel.+33 (0)1 69 29 22 00 • Fax +33 (0)1 69 29 22 10 • e-mail: info-hofr-sales@hoerbiger.com
GB	HOERBIGER-ORIGA Ltd. • Unit 12 Brunel Court • Waterwells Business Park • Gloucester GL2 2AL, UK Tel. +44 8700 600655 • Fax +44 8700 600656 • e-mail: info-hogb-sales@hoerbiger.com
IT	HOERBIGER-ORIGA S.R.L. • Via Martiri della Libertà 4/6 • IT-20060 Liscate (MI) Tel. +39 02 95 35 03 07 • Fax +39 02 95 35 05 13 • e-mail: info-hoit-sales@hoerbiger.com
NL	HOERBIGER-ORIGA B.V. • Plaza 11C • NL-4782 SL Moerdijk Tel. +31 168 356 600 • Fax +31 168 356 601 • e-mail: info-honl-sales@hoerbiger.com
NO	HOERBIGER-ORIGA AS • Postboks 2173 Strømsø • NO-3003 Drammen Tel. +47 3 288 08 40 • Fax +47 32 82 83 20 • e-mail: info-hose-sales@hoerbiger.com
MY	HOERBIGER-ORIGA Sdn Bhd • No. 10 & 12 Lorong IKS Juru 3 • MY-14100 Juru, Simpang Ampat, Penang Tel. +60 (0)4 508 10 11 • Fax +60 (0)4 508 21 22 • e-mail: info-hosg-sales@hoerbiger.com
PT	HOERBIGER-ORIGA S.A. • Rua Luz Soriano, 42 • P-4200-380 Porto Tel. +35 1 22 550 71 79 • Fax +35 1 22 509 22 51 • e-mail: hoerbigerportugal@sapo.pt
SE	HOERBIGER-ORIGA AB • Kungsgatan 14, Box 67 • SE-73622 Kungsör Tel. +46 227 411 00 • Fax +46 227 411 29 • e-mail: info-hose-sales@hoerbiger.com
US	HOERBIGER-ORIGA Corporation • 100 West Lake Drive • IL-60139 Glendale Heights, Illinois, USA Tel. +1 630 871 830-0 • Fax +1 630 871 1515 • e-mail: info-hous-sales@hoerbiger.com

The right to introduce technical modifications is reserved

www.hoerbiger-origa.com
www.origa-service.com
www.hoerbiger.com

